



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : BARRIER TYPE TERMINAL BLOCK

PART NO: PTB25CA-B-XXP-10  
XX=NO. OF CONTACTS

RoHS



## PHYSICAL DATA

MOLDED PARTS : PA66.Ul94V-0, BLACK  
TERMINAL : BRASS 0.8t, TIN PLATED  
TERMINAL SCREW : STEEL M3, Ni PLATED  
PACKAGING TYPE : BULK PACKING

## ELECTRICAL DATA

RATED : 250V 15A  
INSULATION WITHSTANDS VOLTAGE : AC2000V/MIN  
INSULATION RESISTANCE : 1000M $\Omega$  OR MORE AT DC500V  
SCREW TORQUE VALUE : 5.3Lb-In  
WIRE RANGE : 22-16 AWG

## ENVIRONMENTAL DATA



TEMPERATURE RANGE : -40° TO +115°C



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : BARRIER TYPE TERMINAL BLOCK

PART NO: PTB25CA-B-XXP-10  
XX=NO. OF CONTACTS

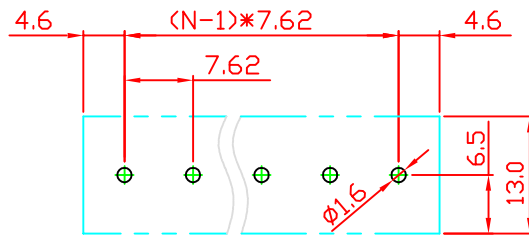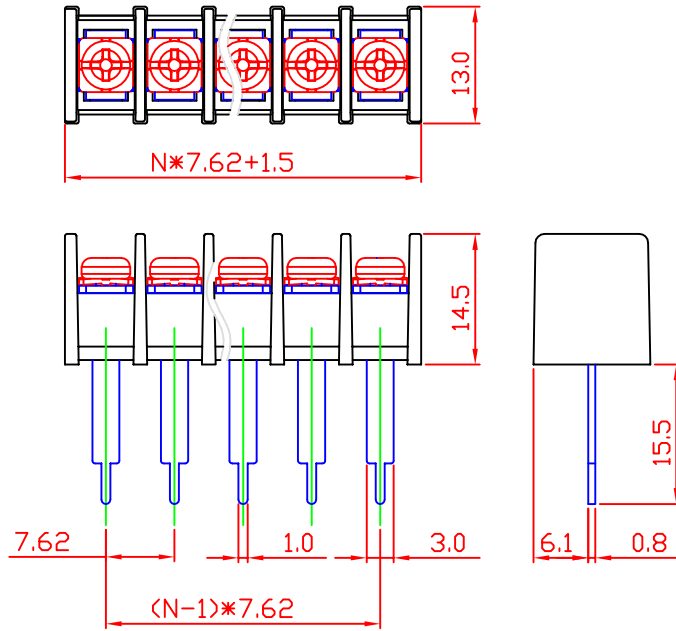

P.C.B LAYOUT

## ORDERING INFORMATION

PTB25CA-B-XXP-10

NO OF CONTACTS
02~30

A	ORIGINAL						
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: $\pm 1\text{mm}$ $\pm .2^\circ$	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.		

<http://www.protectron.in>  
[protectron@protectron.in](mailto:protectron@protectron.in)