



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : BARRIER TYPE TERMINAL BLOCK

PART NO: PTB25S-B-XXP-10
XX=NO. OF CONTACTS

RoHS



PHYSICAL DATA

| | | |
|----------------|---|------------------------|
| MOLDED PARTS | : | PA66.Ul94V-0, BLACK |
| TERMINAL | : | BRASS 0.8t, TIN PLATED |
| TERMINAL SCREW | : | STEEL M3, Ni PLATED |
| PACKAGING TYPE | : | BULK PACKING |

ELECTRICAL DATA

| | | |
|-------------------------------|---|----------------------------------|
| RATED | : | 250V 15A |
| INSULATION WITHSTANDS VOLTAGE | : | AC2000V/MIN |
| INSULATION RESISTANCE | : | 1000M Ω OR MORE AT DC500V |
| SCREW TORQUE VALUE | : | 5.3Lb-In |
| WIRE RANGE | : | 22-16 AWG |

ENVIRONMENTAL DATA




| | | |
|-------------------|---|----------------|
| TEMPERATURE RANGE | : | -40° TO +115°C |
|-------------------|---|----------------|



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : BARRIER TYPE TERMINAL BLOCK

PART NO: PTB25S-B-XXP-10
XX=NO. OF CONTACTS

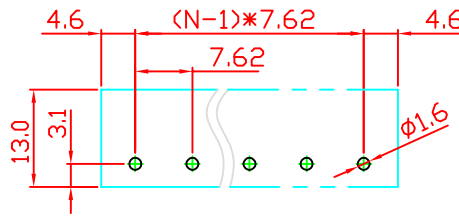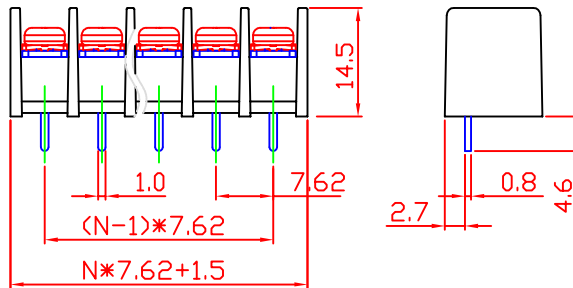

P.C.B LAYOUT

ORDERING INFORMATION

PTB25S-B-XXP-10

| |
|----------------|
| NO OF CONTACTS |
| 02~30 |

| | | | | | | | |
|-----------------|-------------|------------|---------------|---|---|----------|----------|
| A | ORIGINAL | | | | | | |
| REV. | DESCRIPTION | | | DRN. BY | DATE | CK'ED BY | APP'D BY |
| Projection: | | Scale: NTS | Sht. Size: A4 | Gen. Tol.: $\pm 1\text{mm}$ $\pm .2^\circ$ | ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED. | | |

<http://www.protectron.in>
protectron@protectron.in