



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : TERMINAL BLOCK PLUGGABLE TYPE

PART NO: PTB2EDGKL-XX-XXP-1X

1st XX=PITCH
2nd XX=NO. OF CONTACTS
3rd X=COLOR

RoHS



PHYSICAL DATA

INSULATION

MATERIAL : THERMOPLASTIC(UL94V-0)

CONTACT

MATERIAL : COPPER ALLOY, TIN PLATED

PACKAGING TYPE

: BULK PACKING

ELECTRICAL DATA

RATED CURRENT : 12A

VOLTAGE RATING : 300V

WIRE RANGE

SOLID WIRE(AWG) : 12-22

STRANDED WIRE(AWG) : 12-22

TORQUE(Lb-In) : 4

SCREW : M3

WIRE STRIP LENGTH : 7-8mm

WITHSTANDING VOLTAGE : 1.6KV

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40° TO +105°C




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION :TERMINAL BLOCK PLUGGABLE TYPE

PART NO: PTB2EDGKL-XX-XXP-1X

1st XX=PITCH
2nd XX=NO. OF CONTACTS
3rd X=COLOR

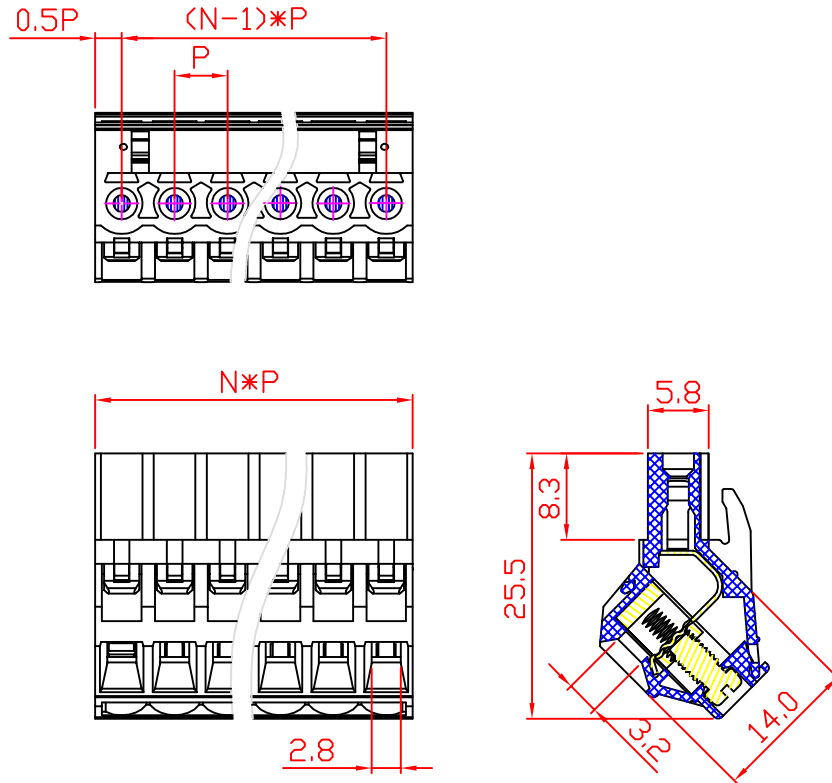

ORDERING INFORMATION

PTB2EDGKL-XX-XXP-1X

PITCH
5.0
5.08
10.0
10.16

NO OF CONTACTS
02~24(PITCH5.0/5.08)
02~12(PITCH10.0/10.16) (SOLID BLOCK)

COLOR
0=BLACK
5=GREEN
6=BLUE
8=GREY

A	ORIGINAL						
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: $\pm 0.5\text{mm}$ $\pm 0.2^\circ$	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.		