



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : TERMINAL BLOCK HOUSING, PLUGGABLE TYPE
WITH HOOK

PART NO:PTB2EDGKX-XX-XXP-1X-00
1st X=BODY TYPE
2nd XX=PITCH
3rd XX=NO. OF CONTACTS
4th X=COLOR

RoHS



PHYSICAL DATA

MATERIAL : THERMOPLASTIC(UL94V-0)
CONTACT : COPPER ALLOY, TIN PLATED
PACKAGING TYPE : BULK PACKING

ELECTRICAL DATA

RATED CURRENT : 10A
INSULATION RESISTANCE : 5000M OHMS MIN
DIELECTRIC VOLATGE : 1600V AC/MIN
CONTACT RESISTANCE : 20m OHMS MAX
VOLTAGE RATING : 300V
WIRE RANGE : 24~12AWG

MECHANICAL DATA

TORQUE : 3.5Lb-in

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40° TO +105°C



PROTECTRON ELECTROMECH (P) LTD


DESCRIPTION : TERMINAL BLOCK HOUSING, PLUGGABLE TYPE WITH HOOK

PART NO:PTB2EDGKX-XX-XXP-1X-00
1st X=BODY TYPE
2nd XX=PITCH
3rd XX=NO. OF CONTACTS
4th X=COLOR

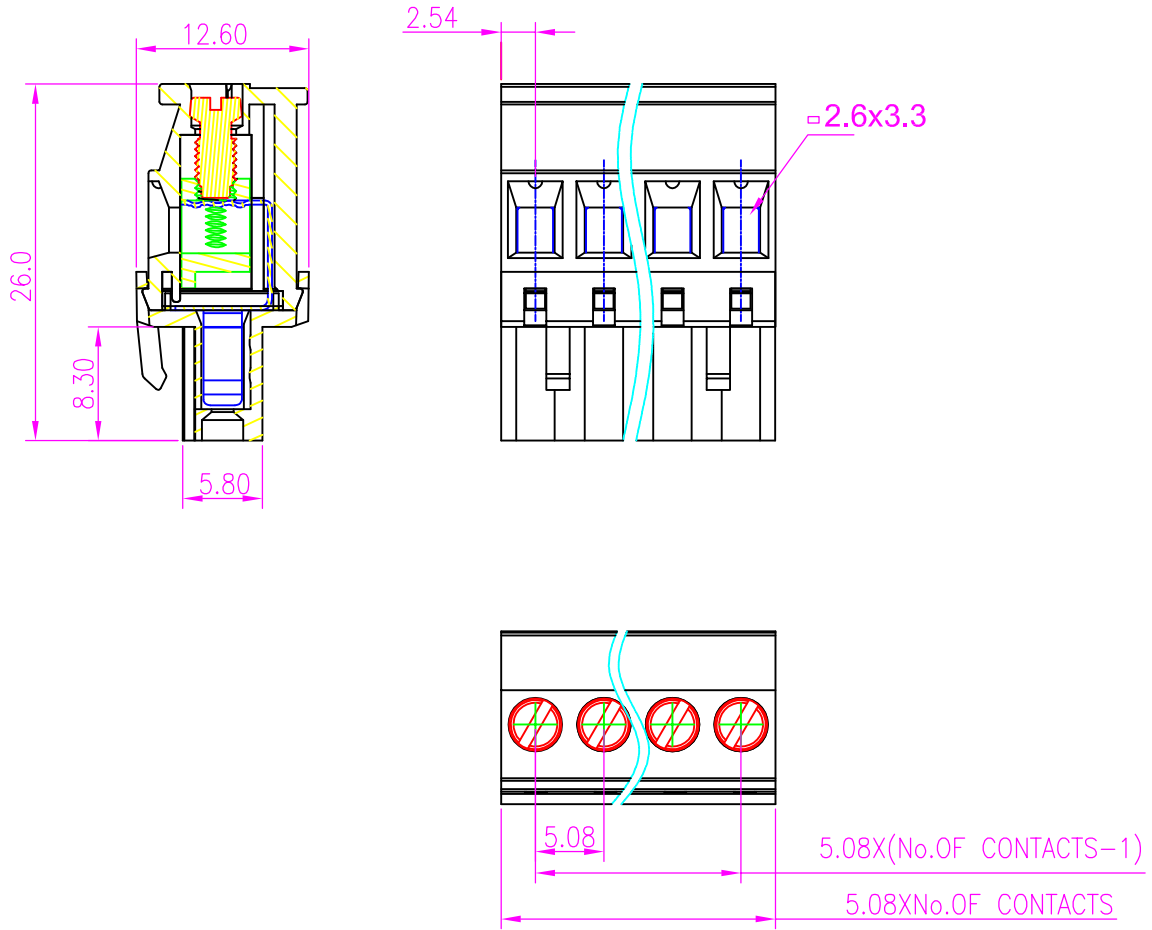


ORDERING INFORMATION

PTB2EDGKX-XX-XXP-1X-00

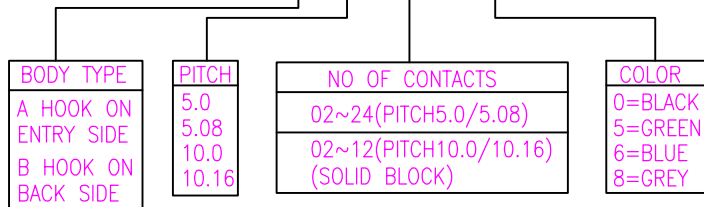

A	ORIGINAL	SUJATHA	03.09.2013		
REV.	DESCRIPTION		DRN. BY	DATE	CK'ED BY APP'D BY

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.5mm
±0.2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.