



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : TERMINAL BLOCK PLUGGABLE TYPE

PART NO: PTB333K-XX-XXP-1X  
1st XX=PITCH  
2nd XX=NO. OF CONTACTS  
3rd X=COLOR

RoHS



## PHYSICAL DATA

### INSULATION

MATERIAL : THERMOPLASTIC(UL94V-0)

### CONTACT

MATERIAL : COPPER ALLOY, TIN PLATED

### PACKAGING TYPE

: BULK PACKING

## ELECTRICAL DATA

RATED CURRENT : 10A

VOLTAGE RATING : 300V

### WIRE RANGE

SOLID WIRE(AWG) : 16-28

STRANDED WIRE(AWG) : 16-28

TORQUE(Lb-In) : 1.7

SCREW : M2

WIRE STRIP LENGTH : 5-6mm

WITHSTANDING VOLTAGE : 1.6KV

## ENVIRONMENTAL DATA



TEMPERATURE RANGE : -40° TO +105°C



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION :TERMINAL BLOCK PLUGGABLE TYPE

PART NO: PTB333K-XX-XXP-1X  
1st XX=PITCH  
2nd XX=NO. OF CONTACTS  
3rd X=COLOR

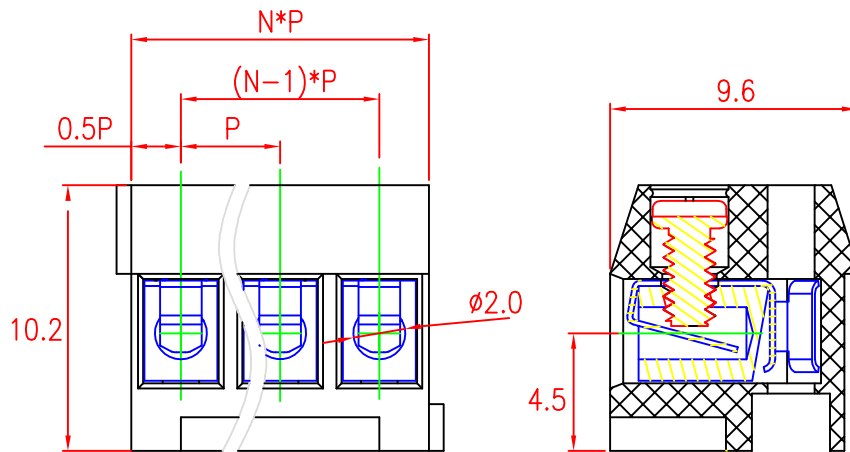

## ORDERING INFORMATION

PTB333K-XX-XXP-1X

<b>PITCH</b> 3.5 3.81 7.0 7.62	<b>NO OF CONTACTS</b> 02~24(PITCH3.5/3.81) 02~12(PITCH7.0/7.62)	<b>COLOR</b> 0=BLACK 5=GREEN 6=BLUE 8=GREY
--	---	--

A	ORIGINAL						
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY	APP'D BY

Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.5mm ±0.2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.
-----------------	------------	---------------	----------------------------	---

<http://www.protectron.in>  
protectron@protectron.in