



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : TERMINAL BLOCK PLUGGABLE TYPE

PART NO: PTB396KM-XX-XXP-1X

1st XX=PITCH

2nd XX=NO. OF CONTACTS

3rd X=COLOR

RoHS



PHYSICAL DATA

INSULATION

MATERIAL : THERMOPLASTIC(UL94V-0)

CONTACT

MATERIAL : COPPER ALLOY, TIN PLATED

PACKAGING TYPE

: BULK PACKING

ELECTRICAL DATA

RATED CURRENT : 8A

VOLTAGE RATING : 300V

WIRE RANGE

SOLID WIRE(AWG) : 16-28

STRANDED WIRE(AWG) : 16-28

TORQUE(Lb-In) : 1.7

SCREW : M2

WIRE STRIP LENGTH : 6-7mm

WITHSTANDING VOLTAGE : 1.6KV

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40° TO +105°C



PROTECTRON ELECTROMECH (P) LTD


DESCRIPTION :TERMINAL BLOCK PLUGGABLE TYPE

PART NO: PTB396KM-XX-XXP-1X

1st XX=PITCH

2nd XX=NO. OF CONTACTS

3rd X=COLOR

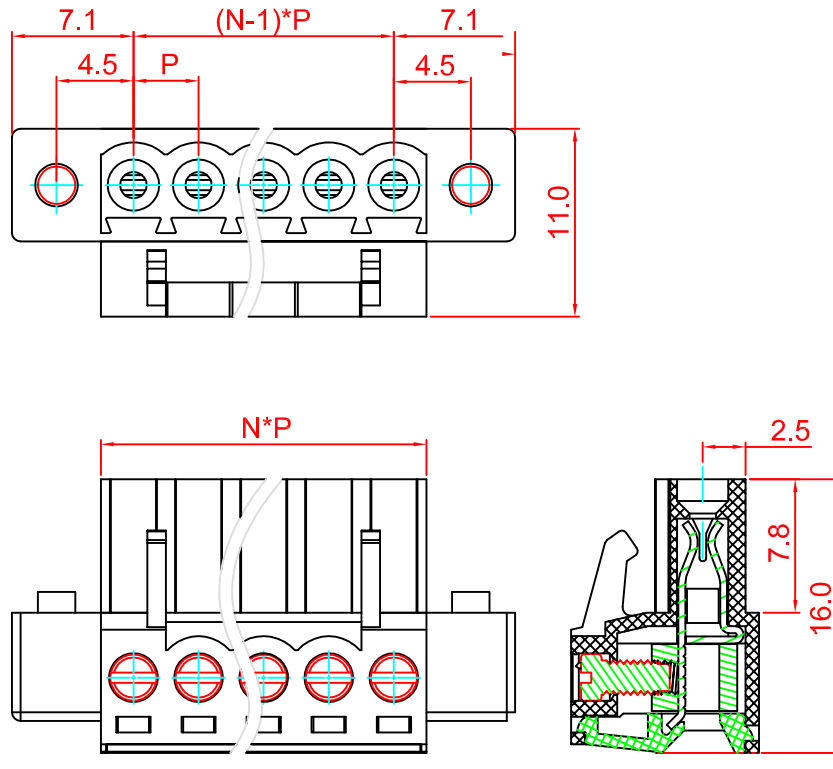

ORDERING INFORMATION

PTB396KM-XX-XXP-1X

PITCH 3.81 7.62	NO OF CONTACTS 02~24(PITCH3.81) 02~12(PITCH7.62) (SOLID BLOCK)	COLOR 0=BLACK 5=GREEN 6=BLUE 8=GREY
------------------------------	--	--

A	ORIGINAL						
REV.	DESCRIPTION			DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.5mm ±0.2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.		

<http://www.protectron.in>
protectron@protectron.in