




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.5mm PITCH RELIMATE CONNECTORS, RIGHT ANGLE

PART NO: P9052R29-19-X
X=NO. OF WAYS(2-20)

RoHS

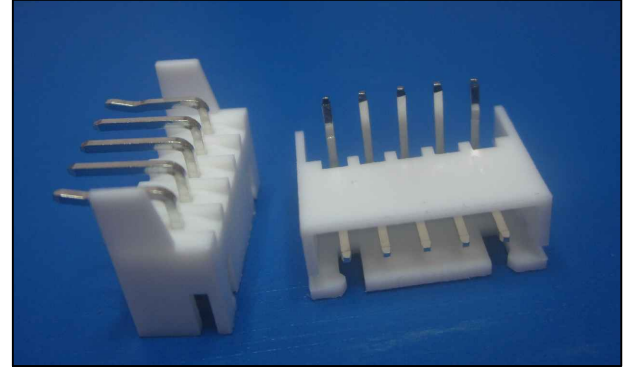

PHYSICAL

INSULATION

MATERIAL : NYLON
FLAMMABILITY : UL94V-0
COLOR : NATURAL COLOR
CONTACT : COPPER ALLOY, TIN PLATED
PACKAGING TYPE : BULK PACKING

ELECTRICAL

CURRENT RATING : 3A
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 1000V AC/MIN
CONTACT RESISTANCE : 20m OHMS MAX
VOLTAGE RATING : 250V AC/DC

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -25° TO +85° C
PROCESS RATING : 230°C FOR 5SEC



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.5mm PITCH RELIMATE CONNECTORS, RIGHT ANGLE

PART NO: P9052R29-19-X
X=NO. OF WAYS(2-20)

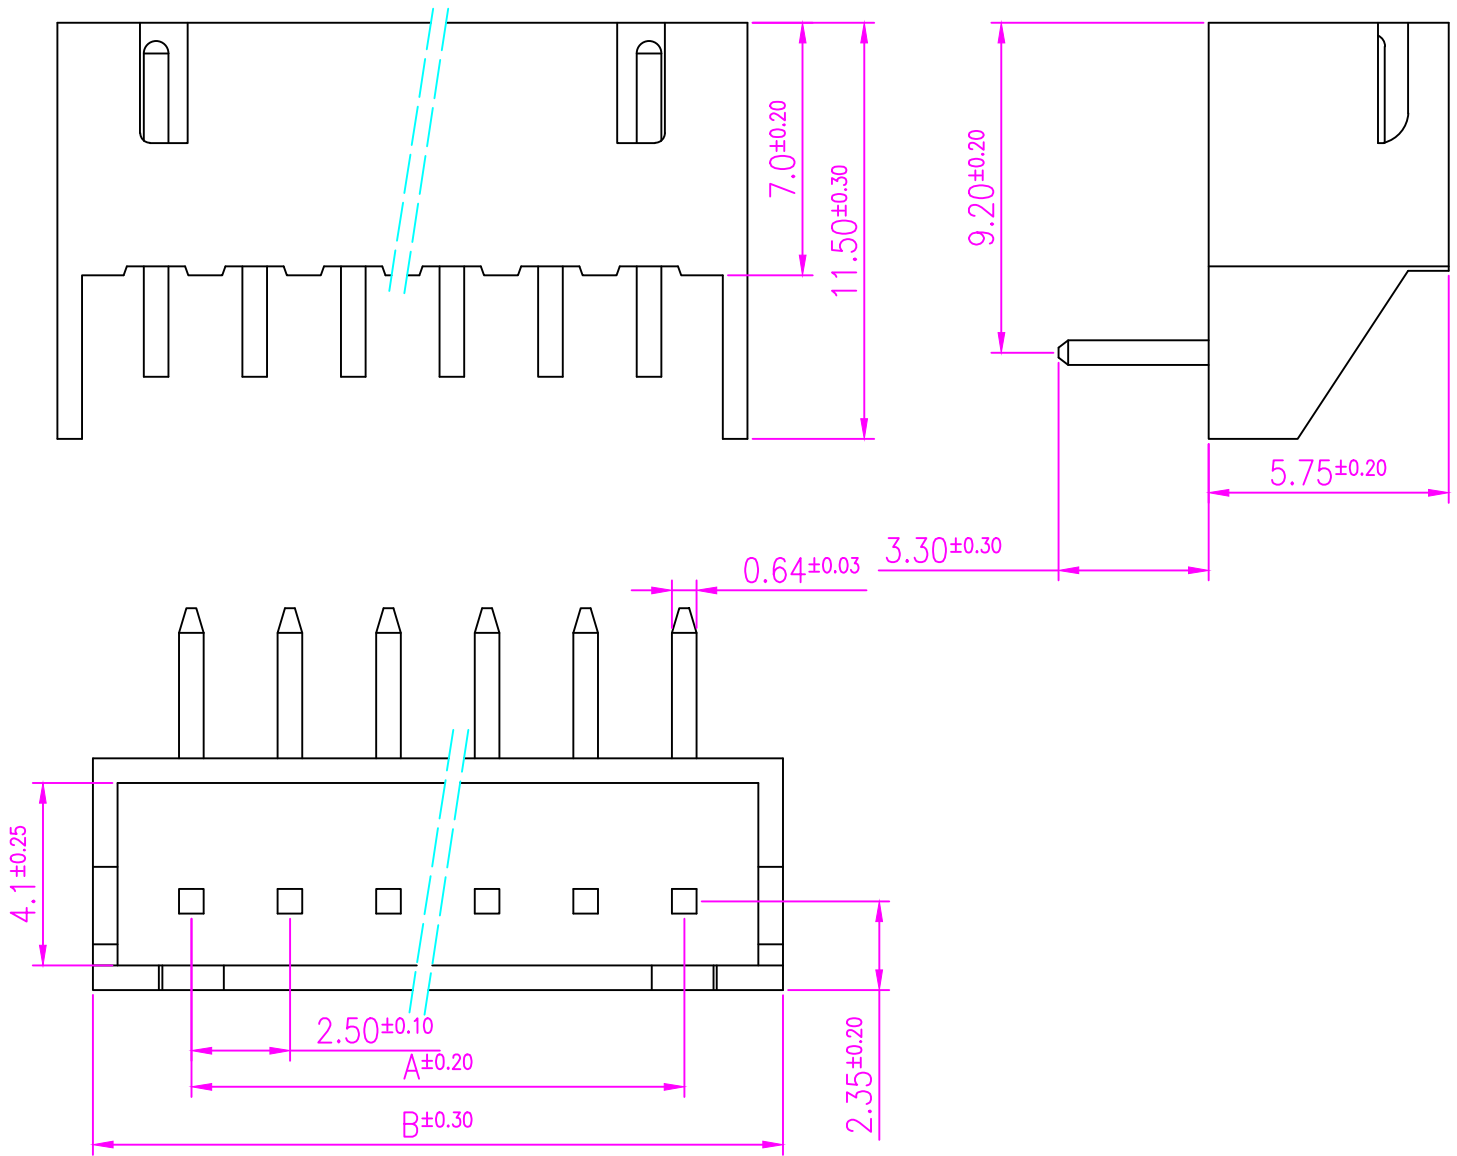

A	ORIGINAL	GK	29.01.2000		
REV.	DESCRIPTION		DRN BY	DATE	CKED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: ± 0.35 mm	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : 2.5mm PITCH RELIMATE CONNECTORS, RIGHT ANGLE

PART NO: P9052R29-19-X
X=NO. OF WAYS(2-20)

ORDERING INFORMATION

P9052R29-19-X
↓
NO OF WAYS
(2-20)

No. of ways	DIM.A(mm)	DIM.B(mm)	Part Number
2	2.5	7.5	P9052R29-19-2
3	5.0	10.0	P9052R29-19-3
4	7.5	12.5	P9052R29-19-4
5	10.0	15.0	P9052R29-19-5
6	12.5	17.5	P9052R29-19-6
7	15.0	20.0	P9052R29-19-7
8	17.5	22.5	P9052R29-19-8
9	20.0	25.0	P9052R29-19-9
10	22.5	27.5	P9052R29-19-A
11	25.0	30.0	P9052R29-19-B
12	27.5	32.5	P9052R29-19-C
13	30.0	35.0	P9052R29-19-D
14	32.5	37.5	P9052R29-19-E
15	35.0	40.0	P9052R29-19-F
16	37.5	42.5	P9052R29-19-G
17	40.0	45.0	P9052R29-19-H
18	42.5	47.5	P9052R29-19-I
19	45.0	50.0	P9052R29-19-J
20	47.5	52.5	P9052R29-19-K

MATES WITH

CRIMP TERMINAL WIRE SIZE:
22-28 AWG

P9052H - HOUSING
P9052T - TERMINAL

MOQ- ----

SPQ- ----