



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : IDC SOCKET 2.54mm PITCH DUAL ROW, WITH STRAIN RELIEF

PART NO: P9403IDS-XX-21
XX=NO OF CONTACTS(6-64)

RoHS



PHYSICAL

INSULATION

MATERIAL : PBT
FLAMMABILITY : UL94V-0
COLOR : BLACK

CONTACT

MATERIAL : COPPER ALLOY
CONTACT PLATING : SELECTIVE GOLD PLATING
PACKAGING TYPE : TUBE/TRAY

ELECTRICAL

CURRENT RATING : 3A
INSULATION RESISTANCE : 1000M OHMS MIN
CONTACT RESISTANCE : 20m OHMS MAX
DIELECTRIC VOLTAGE : 1000V AC/MIN

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40°C TO +105°C



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : IDC SOCKET 2.54mm PITCH DUAL ROW, WITH STRAIN RELIEF

PART NO: P9403IDS-XX-21
XX=NO OF CONTACTS(6-64)

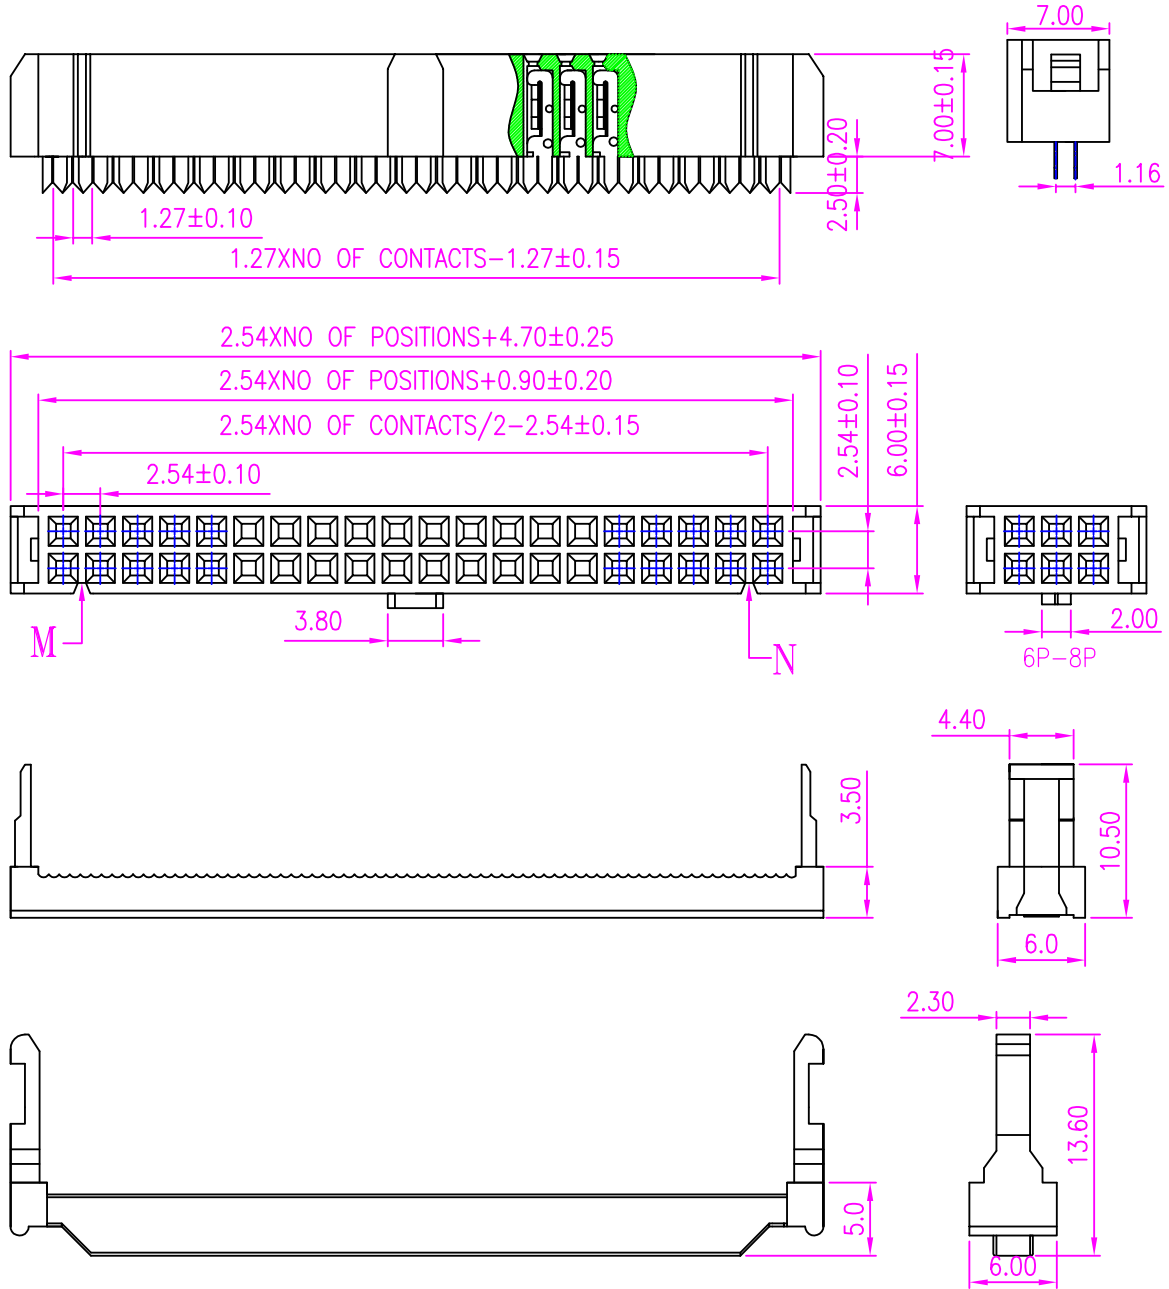

A3	DRAWING REVISED	VISHWA.P	03.06.2014		
A2	PLATING DETAIL IS REVISED	LOKANATH	11.01.2010		
A1	DIMENSIONS FOR 36 POSITIONS INCLUDED	ANIL	27.06.2008		
A	ORIGINAL	CHAITRA	27.12.2006		
REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY

Projection: Scale: NTS Sht. Size: A4 Gen. Tol.: ±0.25mm ±0.2° ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : IDC SOCKET 2.54mm PITCH DUAL ROW, WITH STRAIN RELIEF

PART NO: P9403IDS-XX-21
XX=NO OF CONTACTS(6-64)

6P	WITHOUT SLOT "M" AND "N"
8P-12P	WITH SLOT "M" AND WITHOUT SLOT "N"
14P-64P	WITH SLOT "M" AND "N"

ORDERING INFORMATION

P9403IDS-XX-21

|
NO OF CONTACTS
(6-64)

MATES WITH

P9903-XXA-15L1
P9904-XXA-15L1
P9603,P9604
P9605

MOQ- ----

SPQ- ----