

DESCRIPTION : 3PORT ASSEMBLY, 200mm LONG

PART NO:PCA002252

RoHS



CABLE	UL2725 28AWGX2C(7/0.12TC), OD 3.0mm BLACK SMOOTH
P4	DC 2.0X0.6X13.2mm BLACK INSULATION
P3	MICRO USB 5P M SOLDER TYPE GOLD FLASH PIN BLACK CONNECT SHELL NICKEL PIN 2 & 3 SHORT
P2	MINI USB 5P AM SOLDER TYPE GOLD FLASH PIN PBT BLACK SHELL NICKEL
P1	USB 2.0 AM SOLDER TYPE GOLD FLASH PIN WHITE CONNECT SHELL NICKEL
ITEM	DESCRIPTION

NOTE :


1. 100% TEST SHORT.OPEN MISWIRE.
2. INSULATION RESISTANCE : 10MΩMin
3. CONTACT RESISTANCE : 2ΩMAX
4. DIELECTRIC VORAGE : 300V DC FOR 1minute
5. ALL MATERIAL SHALL COMPLY WITH RoHS.

ORDERING INFORMATION

PCA002252


DESCRIPTION : 3PORT ASSEMBLY, 200mm LONG

PART NO:PCA002252

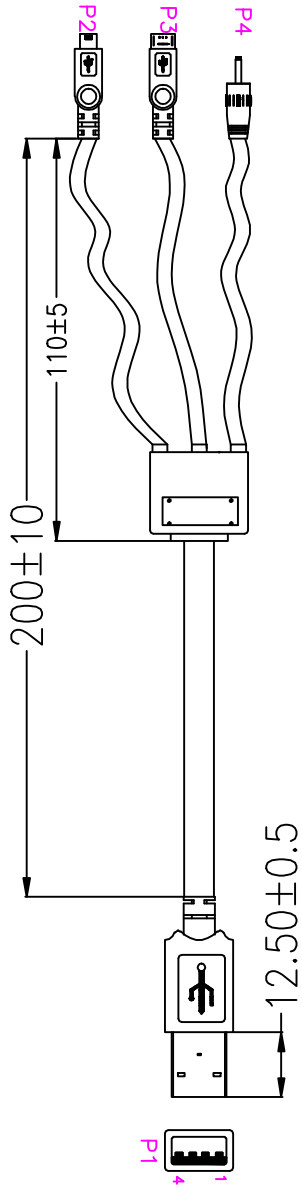

P1	COLOUR	P2	P3	P4
1	RED	1	1	1
4	BLACK	5	5	2

A	ORIGINAL	SUJATHA	06.12.2014		
REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY

Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±1mm ±2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.
--	------------	---------------	------------------------	---