



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PA CONNECTORS 2.0mm PITCH, DUAL ROW S/T  
POLARISED, RoHS.

PART NO: P9022S29-1X-XX  
XX= NO.OF CONTACTS

RoHS



## PHYSICAL DATA

### INSULATION

MATERIAL : NYLON66  
FLAMMABILITY : UL94V-0  
CRIMP TERMINAL : BRASS  
PACKAGING TYPE : STANDARD PACKING

## ELECTRICAL DATA

CURRENT RATING : 3A AC,DC  
CONTACT RESISTANCE : 30mΩ MAX  
INSULATION RESISTANCE : 1000MΩ MIN  
WITHSTANDING VOLTAGE : 1000V AC/MINUTE

## ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40°C ~ +105°C




**PROVISIONAL**



# PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PA CONNECTORS 2.0mm PITCH, DUAL ROW S/T  
POLARISED, RoHS.


PART NO: P9022S29-1X-XX  
XX= NO.OF CONTACTS

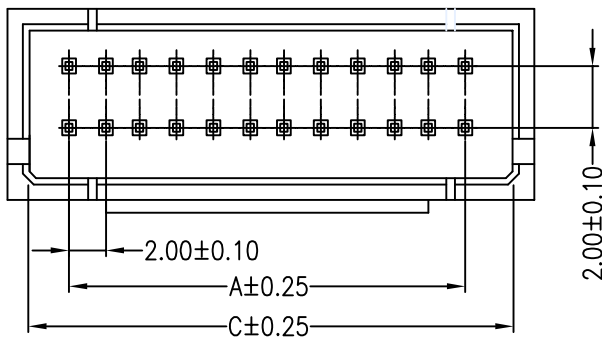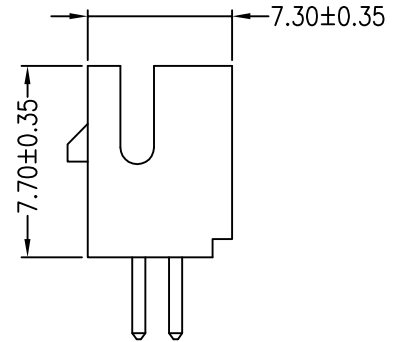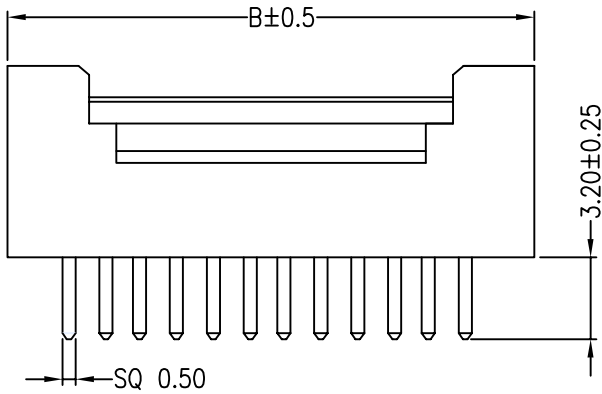

## ORDERING INFORMATION & DIMENSION

P9022S29-1X-XX

PART NO		DIMENSION		
TIN PLATED	GOLD PLATED	A	B	C
P9022S29-19-06	P9022S29-12-06	4.00	8.00	6.80
P9022S29-19-08	P9022S29-12-08	6.00	10.00	8.80
P9022S29-19-10	P9022S29-12-10	8.00	12.00	10.80
P9022S29-19-12	P9022S29-12-12	10.00	14.00	12.80
P9022S29-19-14	P9022S29-12-14	12.00	16.00	14.80
P9022S29-19-16	P9022S29-12-16	14.00	18.00	16.80
P9022S29-19-18	P9022S29-12-18	16.00	20.00	18.80
P9022S29-19-20	P9022S29-12-20	18.00	22.00	20.80
P9022S29-19-22	P9022S29-12-22	20.00	24.00	22.80
P9022S29-19-24	P9022S29-12-24	22.00	26.00	24.80
P9022S29-19-26	P9022S29-12-26	24.00	28.00	26.80
P9022S29-19-28	P9022S29-12-28	26.00	30.00	28.80
P9022S29-19-30	P9022S29-12-30	28.00	32.00	30.80
P9022S29-19-32	P9022S29-12-32	30.00	34.00	32.80
P9022S29-19-40	P9022S29-12-40	38.00	42.00	40.80

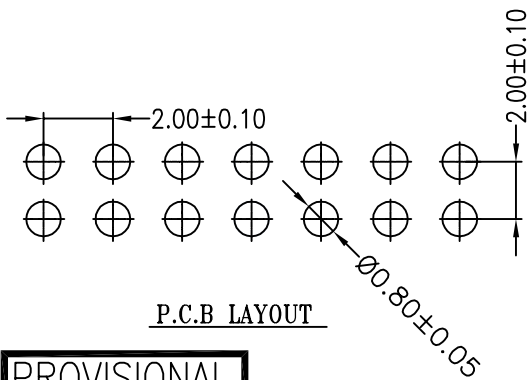

**PROVISIONAL**

A	ORIGINAL	SUPREETA	23.11.2016		
REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY

Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.35mm ±2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	
-----------------	------------	---------------	---------------------------	---	--

<http://www.protectron.in>  
protectron@protectron.in