




PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PA CONNECTOR 2.0MM PITCH, SINGLE ROW
STRAIGHT, ROHS

PART NO: P9086S29-12-X
X=NO. OF CONTACTS

RoHS

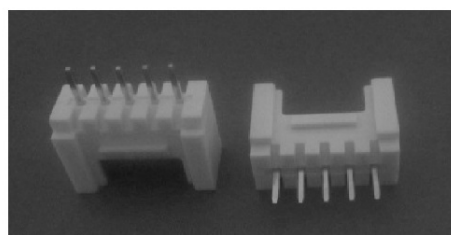

PHYSICAL DATA

INSULATION

MATERIAL : NYLON

FLAMMABILITY : UL94V-0

CONTACT : COPPER ALLOY, GOLD PLATED

PACKAGING TYPE : BULK PACKING

ELECTRICAL DATA

CURRENT RATING : 1A AC, DC

INSULATION RESISTANCE : 1000M OHMS MIN

DIELECTRIC WITHSTANDING : 1000 V AC FOR 1 MINUTE

CONTACT RESISTANCE : 30mΩ Max.

VOLTAGE RATING : 250V AC/DC

ENVIRONMENTAL DATA




TEMPERATURE RANGE : -25° TO +85° C



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PA CONNECTOR 2.0MM PITCH, SINGLE ROW
STRAIGHT, ROHS

PART NO: P9086S29-12-X
X=NO. OF CONTACTS

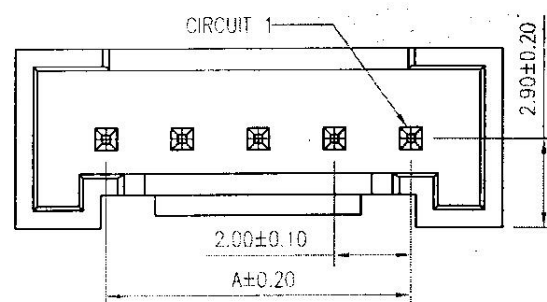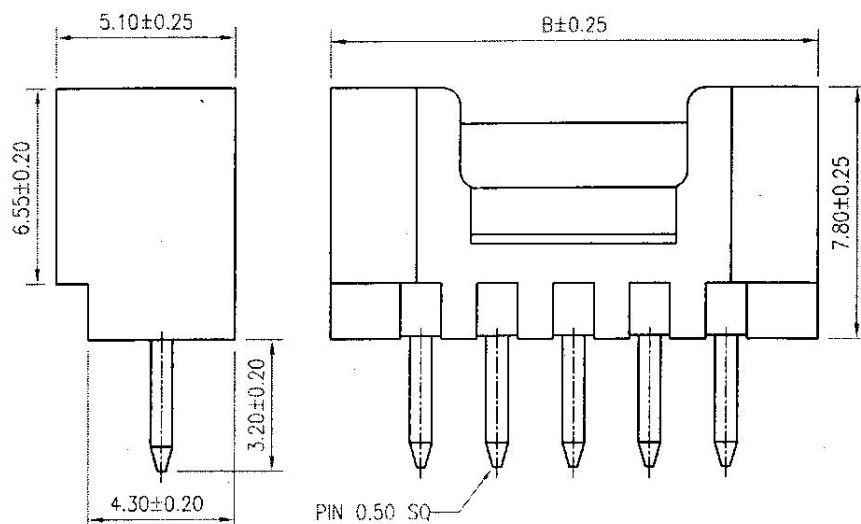

PART No.	DIMENSIONS	
	A	B
P9086S29-12-2	2.00	6.00
P9086S29-12-3	4.00	8.00
P9086S29-12-4	6.00	10.00
P9086S29-12-5	8.00	12.00
P9086S29-12-6	10.00	14.00
P9086S29-12-7	12.00	16.00
P9086S29-12-8	14.00	18.00
P9086S29-12-9	16.00	20.00
P9086S29-12-A	18.00	22.00
P9086S29-12-B	20.00	24.00
P9086S29-12-C	22.00	26.00
P9086S29-12-D	24.00	28.00
P9086S29-12-E	26.00	30.00
P9086S29-12-F	28.00	32.00
P9086S29-12-G	30.00	34.00

A1	INSULATOR MATERIAL CHANGED FROM NYLON 6T TO NYLON 46	VENILA	06.02.2015	CK'D BY	APP'D BY
A	ORIGINAL	CHAITRA	24.12.2007		
REV.	DESCRIPTION		DRN. BY	DATE	APP'D BY
 Projection:		Scale: NTS	Sht. Size: A4	Gen. Tol.: $\pm 0.35\text{mm}$	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.
http://www.protectron.in protectron@protectron.in					