



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER 2.2x3.0mm DUAL ROW SMT

PART NO: P9175-XX-C1-4R

RoHS



PHYSICAL DATA

MATERIAL DATA:

INSULATOR BODY : PBT
FLAMMABILITY : UL94V-0
COLOR : BLACK
CONTACT : BRASS, TIN PLATED

PACKAGING TYPE : TAPE AND REEL PACKING

ELECTRICAL DATA:

CURRENT RATING : 3 AMPS
CONTACT RESISTANCE : 20M OHMS MAX
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC

ENVIRONMENTAL DATA:




OPERATING TEMP. RANGE : -65°C TO +125°C



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER 2.2x3.3mm DUAL ROW SMT

PART NO: P9175-XX-C1-4R

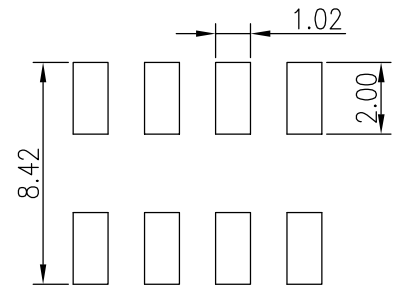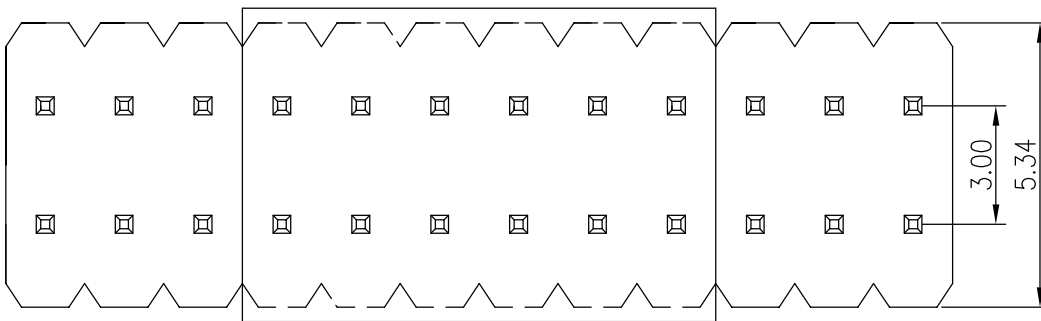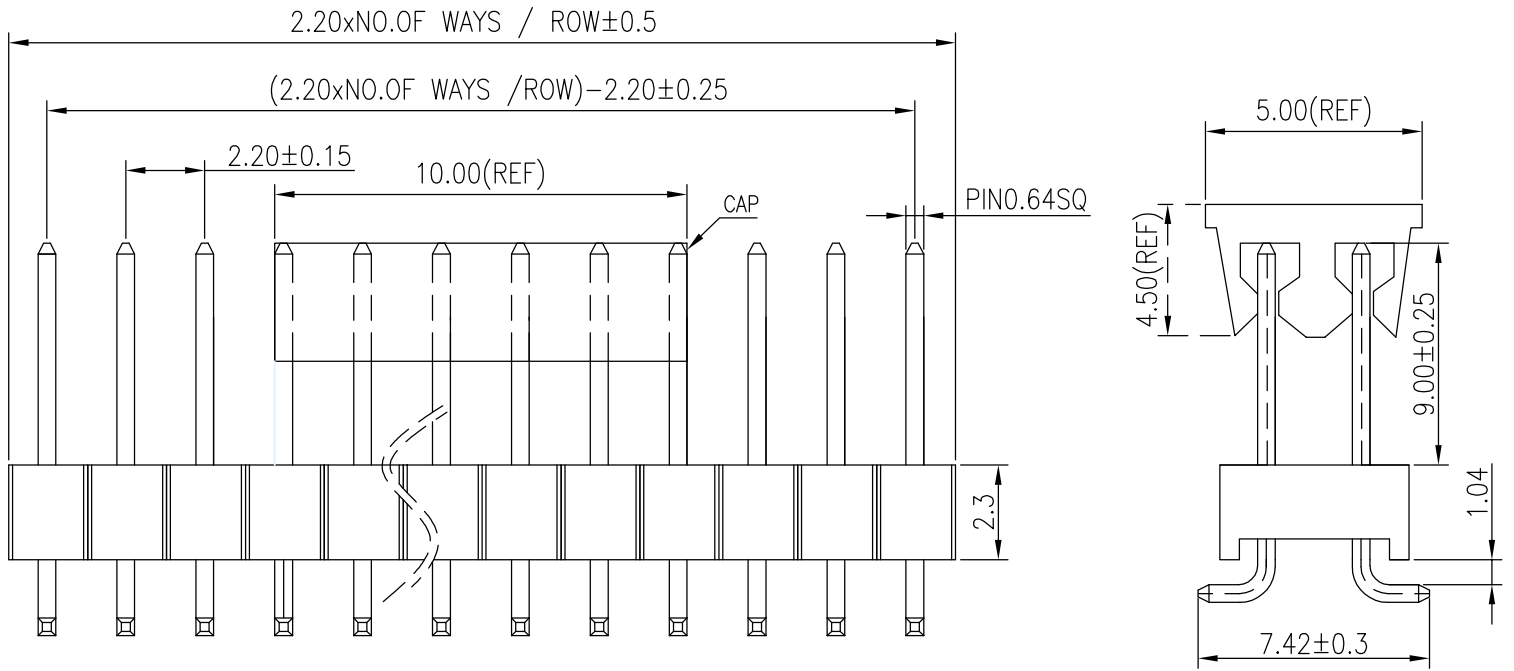

RECOMMENDED P.C.B LAYOUT

ORDERING INFORMATION

P9175-XX-C1-4R

NO OF CONTACTS
(04-80)

P9175-XX-C1-4R - TAPE & REEL + CAP PACKING

A	ORIGINAL	SUPREETA	05.12.2016		
REV.	DESCRIPTION		DRN. BY	DATE	CK'ED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.: $\pm 0.35\text{mm}$ $\pm 2^\circ$	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.

<http://www.protectron.in>
protectron@protectron.in