


**ELECTRICAL**

CURRENT RATING	: 1.5A
INSULATION RESISTANCE	: 500M OHMS MIN
DIELECTRIC WITHSTANDING	: 500V AC
CONTACT RESISTANCE	: 85m OHMS MAX
DURABILITY	: 500Cycles Min
MATING FORCE	: 500g
CRIMP TENSILE STRENGTH	: 2.0kg/Min
RETENTION FORCE	: 1.8kg/Min
ENVIRONMENTAL:	: 0°C – 70°C
OPERATION	: -40°C – +80°C
STORAGE	: -40°C – +80°C

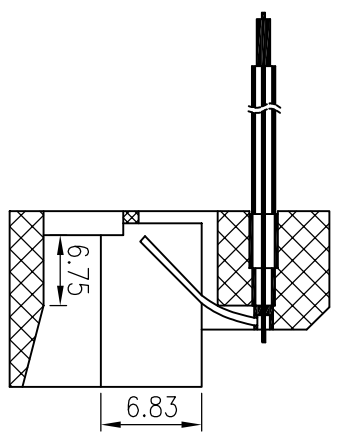

**VIEW ON A**

SL.NO.	CABLE COLOUR
1	-----
2	BLACK
3	RED
4	GREEN
5	YELLOW
6	-----

REV.	ZONE	DESCRIPTION	DRG REV BY	DATE
A		ORIGINAL		30.03.2015
A1		WIRE GAUGE CHANGED FROM 28AWG TO 26AWG	SUMITH	23.06.2016

DOCUMENT CODE : -----		MATERIAL & FINISH Wire: 26AWG(7/00.15) Housing: ABS Resin Contact : COPPER ALLOY, GOLD PLATED		HEAT TREATMENT ---		Gen. Tol. ±0.25mm ±2°		ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	
DRAWN BY : SUMITH		DATE : 30.03.2015		ENG. APP'D : APP'D BY:		Surface 1.9 Finish ReV		This Document is the property of PROTECTORON ELECTROMECH (P) LTD. it shall not be reproduced or communicated to a third party without prior permission.	
DATE : 30.03.2015						Sht. Size: A4		DWG according to STD. Sheet: 1 OF 1	

**PROTECTORON ELECTROMECH (P) LTD.**  
Bangalore, INDIA.