



PROTECTRON ELECTROMECH (P) LTD


DESCRIPTION : RADIAL LEAD MICRO FUSES FAST ACTING

PART NO:PMF SERIES

RoHS



APPROVALS:



PHYSICAL DATA

MATERIAL

BASE AND CAP
ROUND PINS

: PA66, UL 94-V0. BLACK COLOR

: COPPER, TIN PLATED

PACKAGING TYPE

IN BULK

: 1000 pcs per box

ON TAPE

: Ammo Pack, 1000pcs box

ELECTRICAL DATA

BREAKING CAPACITY

: 50A @ 300V AC

VOLTAGE RATING

: UPTO 300VAC

APPLICABLE STANDARDS

IEC60127-1 &
IEC60127-3 SHEET 1V

ELECTRICAL CHARACTERISTIC

RATED CURRENT	1.5 In	2.1 In	2.75 In		4 In		10 In
	MIN	MAX	MIN	MAX	MIN	MAX	MAX
50mA~5A	60 min	30 min	10 ms	3 sec	3 ms	300 ms	20 ms
6.3A	60 min	30 min	10 ms	5 sec	3 ms	300 ms	20 ms




PROTECTRON ELECTROMECH (P) LTD




DESCRIPTION : RADIAL LEAD MICRO FUSES FAST ACTING

PART NO:PMF SERIES



SHORT LEADS

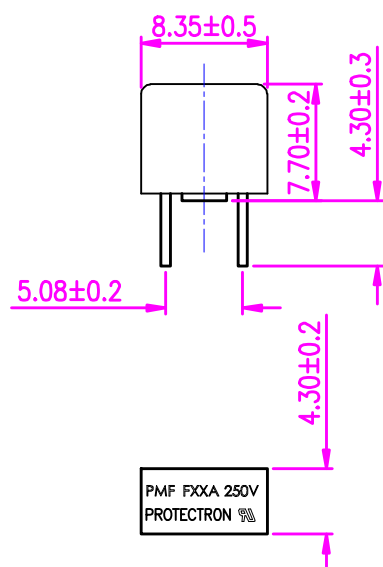

LONG LEADS

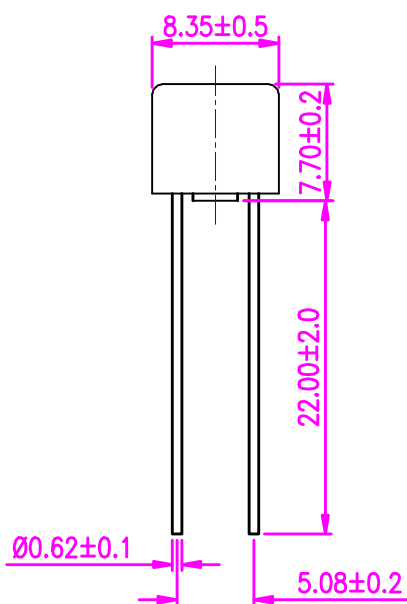

MOUNTING HOLES

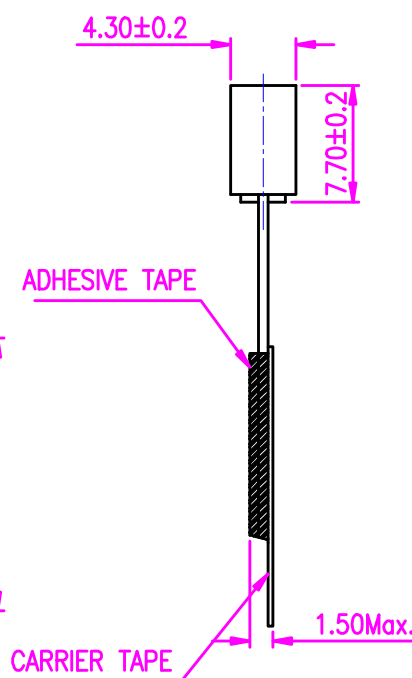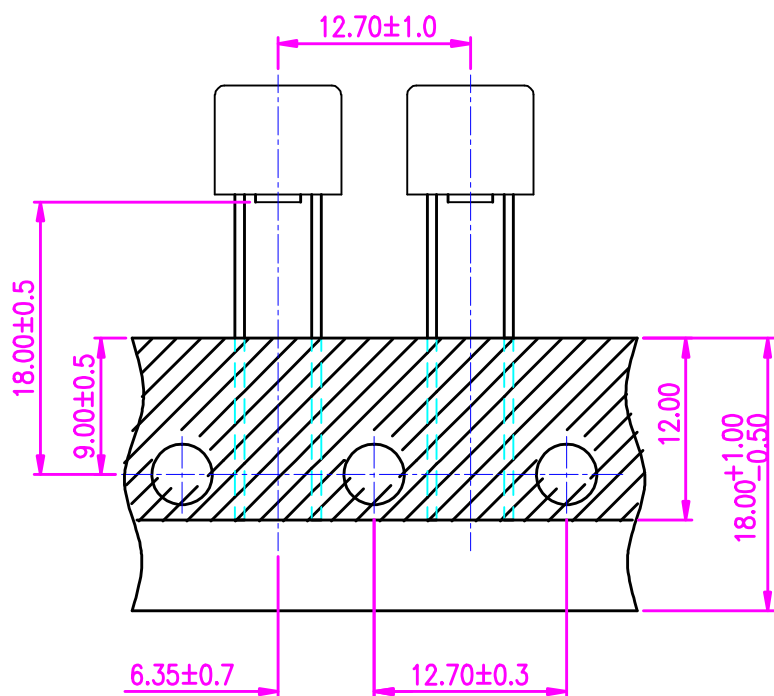

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.25mm
±2'

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : RADIAL LEAD MICRO FUSES FAST ACTING

PART NO:PMF SERIES

FAST ACTING FUSES TYPE PMF

PROTECTRON PART NUMBERS	Ampere Rating (In)	Voltage Rating (V)
PMF 0.5A	500mA	300V
PMF 1A	1A	
PMF 2A	2A	
PMF 3.15A	3.15A	
PMF 4A	4A	
PMF 5A	5A	
PMF 6.3A	6.3A	

ORDERING INFORMATION

PMF SERIES
(REFER TABLE)

A	ORIGINAL		KEERTHI	08.01.2015	
REV.	DESCRIPTION		DRN. BY	DATE	CK'ED BY APP'D BY
Projection: 		Scale: NTS	Sht. Size: A4	Gen. Tol.:±0.25mm ±2'	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.



PROTECTRON ELECTROMECH (P) LTD


DESCRIPTION : RADIAL LEAD MICRO FUSES FAST ACTING

PART NO:PMF SERIES

RoHS



APPROVALS:

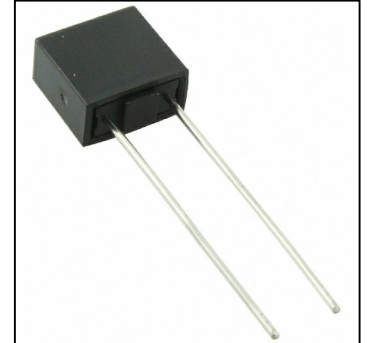

PHYSICAL DATA

MATERIAL

BASE AND CAP
ROUND PINS

: PA66, UL 94-V0. BLACK COLOR

: COPPER, TIN PLATED

PACKAGING TYPE
IN BULK
ON TAPE

: 1000 pcs per box

: Ammo Pack, 1000pcs box

ELECTRICAL DATA

INTERRUPT RATING

: 35A or 10 times the rated current whichever is greater.




PROTECTRON ELECTROMECH (P) LTD




DESCRIPTION : RADIAL LEAD MICRO FUSES FAST ACTING

PART NO:PMF SERIES


SHORT LEADS

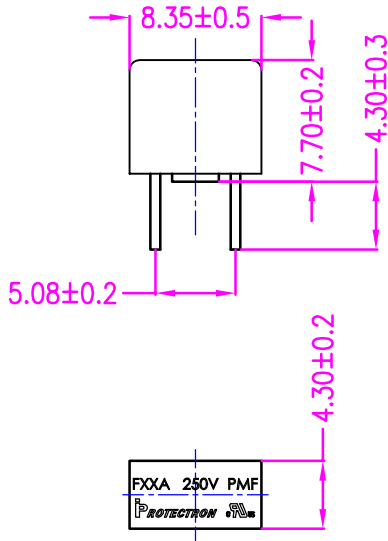

LONG LEADS

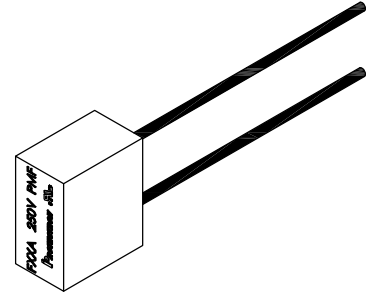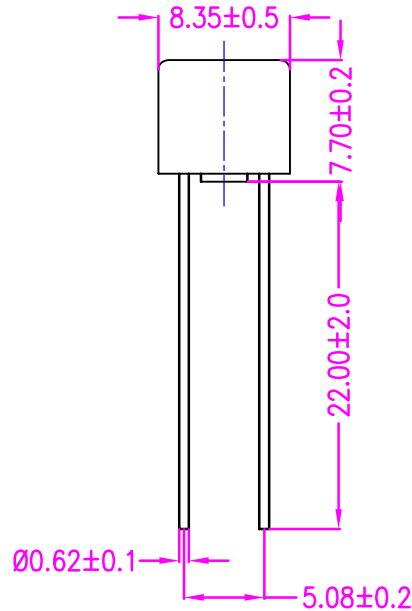

MOUNTING HOLES

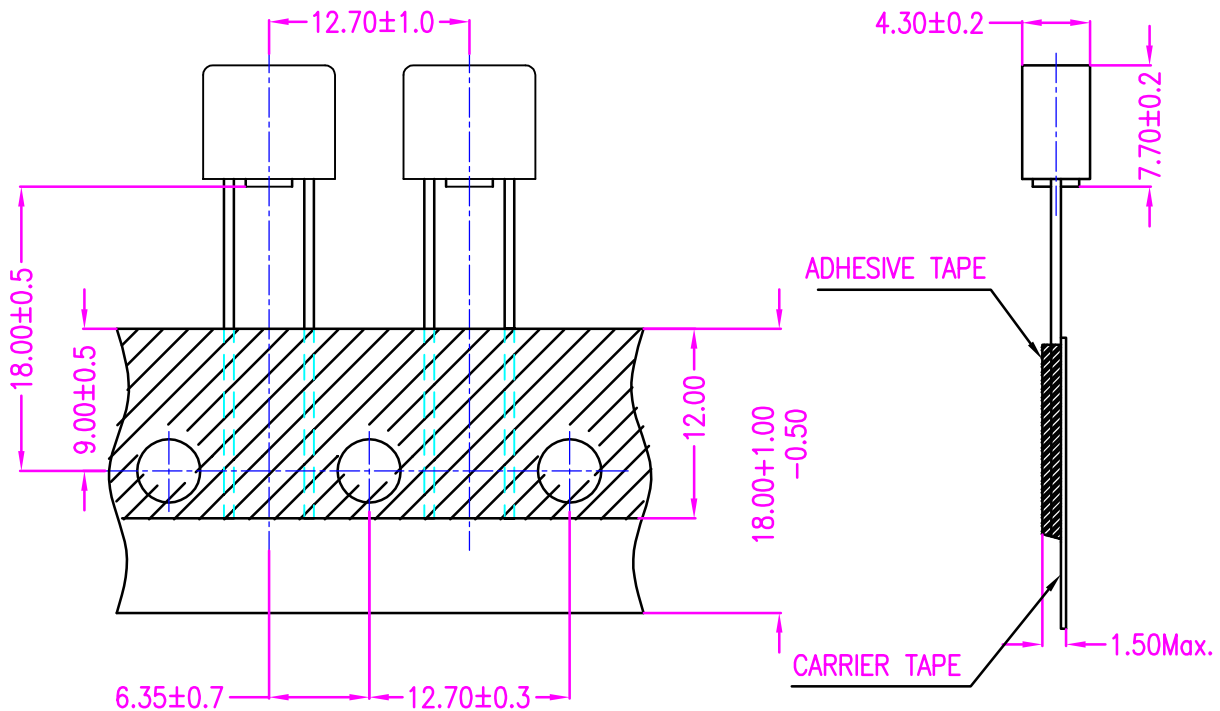

A	ORIGINAL	KEERTHI	15.09.2014		
REV.	DESCRIPTION	DRN. BY	DATE	CK'ED BY	APP'D BY
Projection: 	Scale: NTS	Sht. Size: A4	Gen. Tol.: ±0.25mm ±2°	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.	



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : RADIAL LEAD MICRO FUSES FAST ACTING

PART NO:PMF SERIES

FAST ACTING FUSES TYPE PMF

PROTECTRON PART NUMBERS	Ampere Rating (In)	Voltage Rating (V)
PMF 0.63A	630mA	250V
PMF 0.8A	800mA	
PMF 1A	1A	
PMF 1.25A	1.25A	
PMF 1.6A	1.6A	
PMF 2A	2A	
PMF 2.5A	2.5A	
PMF 3.15A	3.15A	
PMF 4A	4A	
PMF 5A	5A	
PMF 6.3A	6.3A	

ELECTRICAL CHARACTERISTIC

RATED CURRENT	1.5 In	2.1 In	2.75 In		4 In		10 In
	MIN	MAX	MIN	MAX	MIN	MAX	MAX
50mA~5A	60 min	30 min	10 ms	3 sec	3 ms	300 ms	20 ms
6.3A	60 min	30 min	10 ms	5 sec	3 ms	300 ms	20 ms

ORDERING INFORMATION

PMF SERIES
(REFER TABLE)