



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : CCS2, FAST CHARGING PLUG HANDLE

PART NO : PEVCS013-20-11-05

RoHS



ELECTRICAL PARAMETERS

MAX VOLTAGE RATING : 1000V DC
MAX CURRENT RATING : 80A DC
SIGNAL CURRENT : 2A, 30V MAX

MATERIAL AND FINISH

BODY : THERMOPLASTIC
TERMINALS : COPPER ALLOY, SILVER PLATING.

CHARGING CABLE : DC 80A, (DC+)+(DC-)+PE+PP+CP
MAX CHARGING POWER : 80kW

STANDARD : DIN EN 62196-3

DEGREE OF PROTECTION : IP55




AMBIENT TEMPERATURE : -30°C TO +50°C



PROTECTRON ELECTROMECH (P) LTD

DESCRIPTION : CCS2, FAST CHARGING PLUG HANDLE

PART NO : PEVCS013-20-11-05

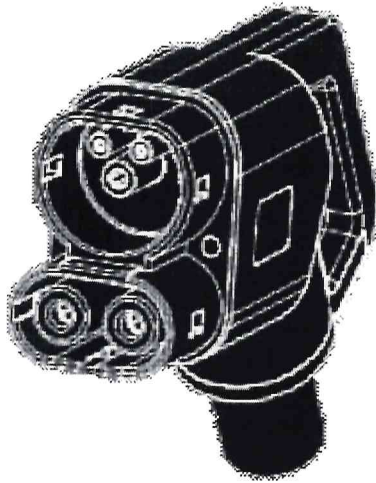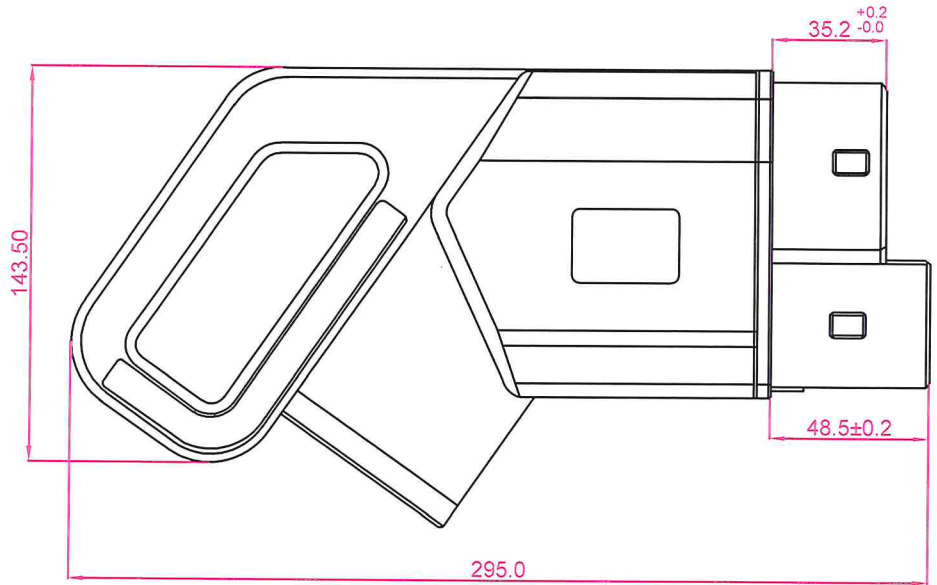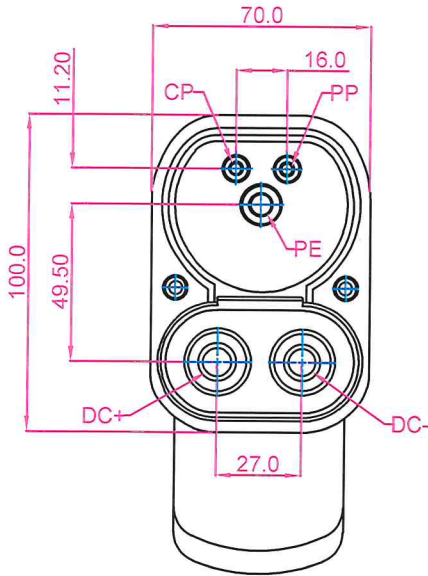

A	ORIGINAL	SHUEAB	18.08.2023	<i>Mishra</i>	<i>Sharma</i>
REV.		DRN BY	DATE	CK'ED BY	APP'D BY
Projection:		Scale: NTS	Sht. Size: A4	Gen. Tol.: ±1mm ±2'	ALL DIMENSIONS ARE IN MM. IF UNLESS OTHERWISE SPECIFIED.

<http://www.protectron.in>
protectron@protectron.in