




DESCRIPTION : FPC/FFC 1.0mm PITCH, SMT, VERTICAL TYPE CONTACT

PART NO: P7045V2C024XX-X

RoHS

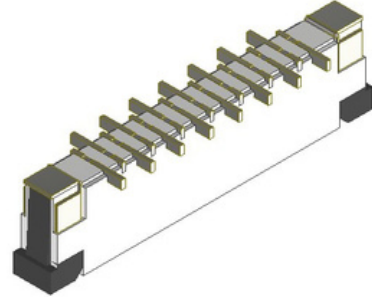

PHYSICAL DATA

INSULATOR BODY : GLASS FIBER NYLON, UL94V-0
TERMINALS : COPPER ALLOY, TIN PLATED
PACKAGING TYPE : TUBE/TAPE AND REEL PACKING

ELECTRICAL DATA

CURRENT RATING : 0.5A
INSULATION RESISTANCE : 500M OHMS MIN
DIELECTRIC WITHSTANDING : 500V AC/MIN
CONTACT RESISTANCE : 30m OHMS MAX




ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40° TO +85° C



DESCRIPTION : FPC/FFC 1.0mm PITCH, SMT, VERTICAL TYPE CONTACT

PART NO: P7045V2C024XX-X

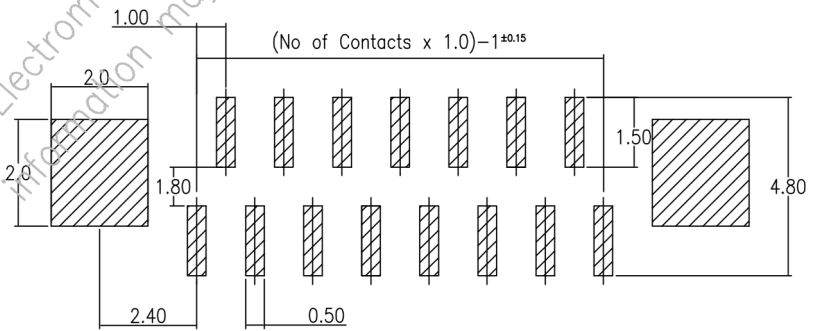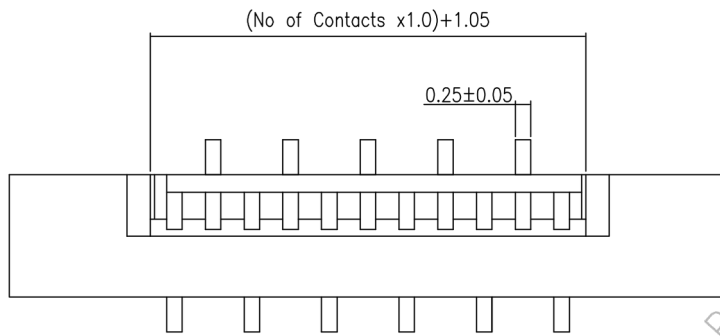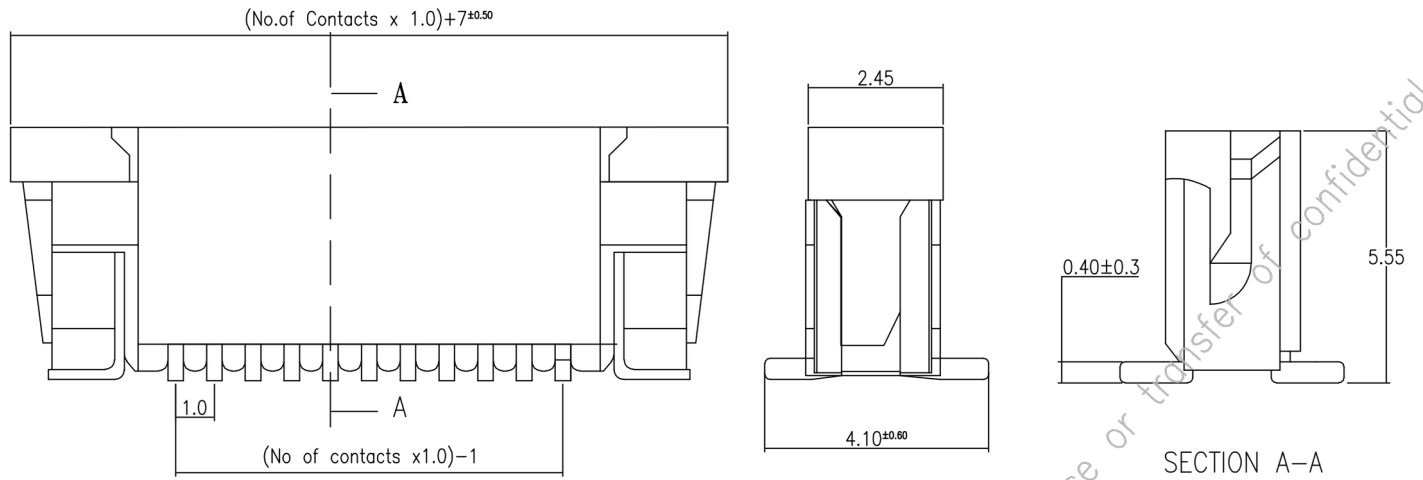

ORDERING INFORMATION

P7045V2C024XX-X

XX= NO. OF CONTACTS
(02-35 CONTACTS)

T=TUBE PACKING
R=TAPE AND REEL PACKING

Recommended PCB Layout
(PCB TOLERANCE ±0.05)