




DESCRIPTION : USB 3.0 A TYPE, HORIZONTAL MOUNT

PART NO: P7071A-09-X

RoHS

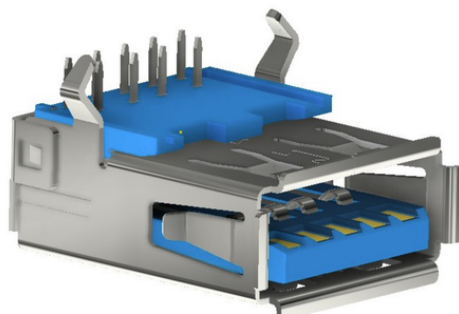

PHYSICAL

INSULATION

MATERIAL

: THERMOPLASTIC

FLAMMABILITY

: UL94V-0

COLOR

: BLUE

CONTACT

MATERIAL

: COPPER ALLOY, SELECTIVE GOLD PLATING

SHELL

: COPPER ALLOY, NICKEL PLATING

PLATING

: REFER TABLE

ELECTRICAL DATA

CURRENT RATING

: 1.5A

VOLTAGE RATING

: 500V AC/DC

INSULATION RESISTANCE

: 100M Ω MAX

CONTACT RESISTANCE

: 30m Ω MAX

MECHANICAL DATA

MATING FORCE

: 3.57Kgf MAX

UNMATING FORCE

: 1.02Kgf MIN

ENVIRONMENT DATA

TEMPERATURE RANGE





: -55°C TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : USB 3.0 A TYPE, HORIZONTAL MOUNT

PART NO: P7071A-09-X

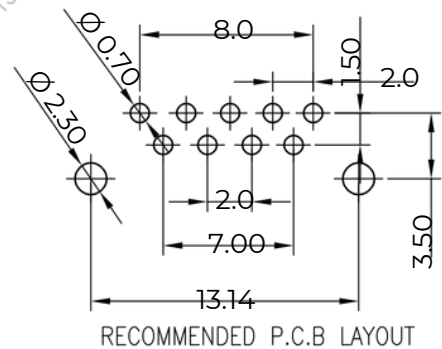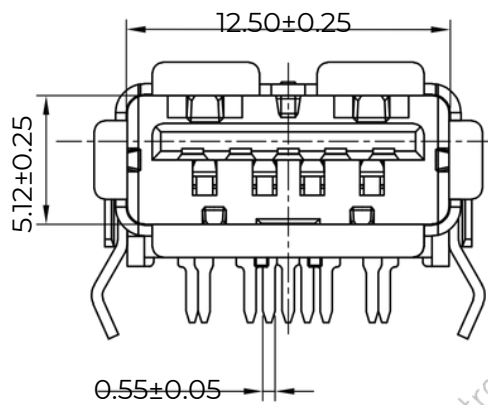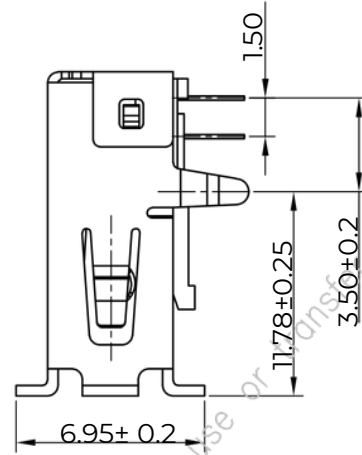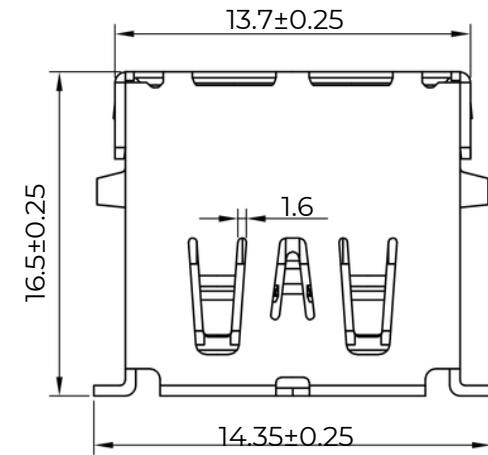

ORDERING INFORMATION

P7071A-09-X

5	1μ" SELECTIVE GOLD
9	30μ" SELECTIVE GOLD
A	15μ" SELECTIVE GOLD
B	5μ" SELECTIVE GOLD



www.protectron.in

Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.5mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

protectron@protectron.in