



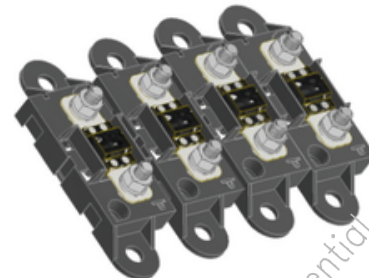

DESCRIPTION : FUSE HOLDER FOR MIDI BOLT DOWN FUSE, RoHS

PART NO: P803B-03-XX

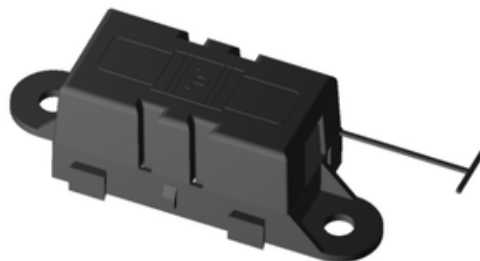

DESCRIPTION

FUSE HOLDER CAN BE USED AS A SINGLE AUTOMOTIVE FUSE HOLDER OR COMBINED WITH ADDITIONAL FUSE HOLDERS TO CREATE A MULTI-FUSE BLOCK. STACKED WITH MIDI BOLT-DOWN FUSES UPTO 200 AMPS.

PHYSICAL DATA

BASE & COVER	:	THERMOPLASTIC, BLACK COLOR
FLAMMABILITY	:	UL94V-0
BOLTS, NUTS & WASHER	:	STAINLESS STEEL 304

ELECTRICAL DATA

MAX VOLTAGE RATING	:	58V DC
MAX FUSE RATING	:	200A
WIRE SIZE	:	25mm ²

ENVIRONMENTAL DATA

TEMPERATURE RANGE	:	-40°C TO +125°C
-------------------	---	-----------------

MECHANICAL DATA

TIGHTENING TORQUE FOR FUSE	:	4 Nm MAX.
----------------------------	---	-----------


FUSE DATA

PBFT-L IN & PBFT-LCT-IN	:	30A TO 200A
-------------------------	---	-------------



DESCRIPTION : FUSE HOLDER FOR MIDI BOLT DOWN FUSE, RoHS


PART NO: P803B-03-XX

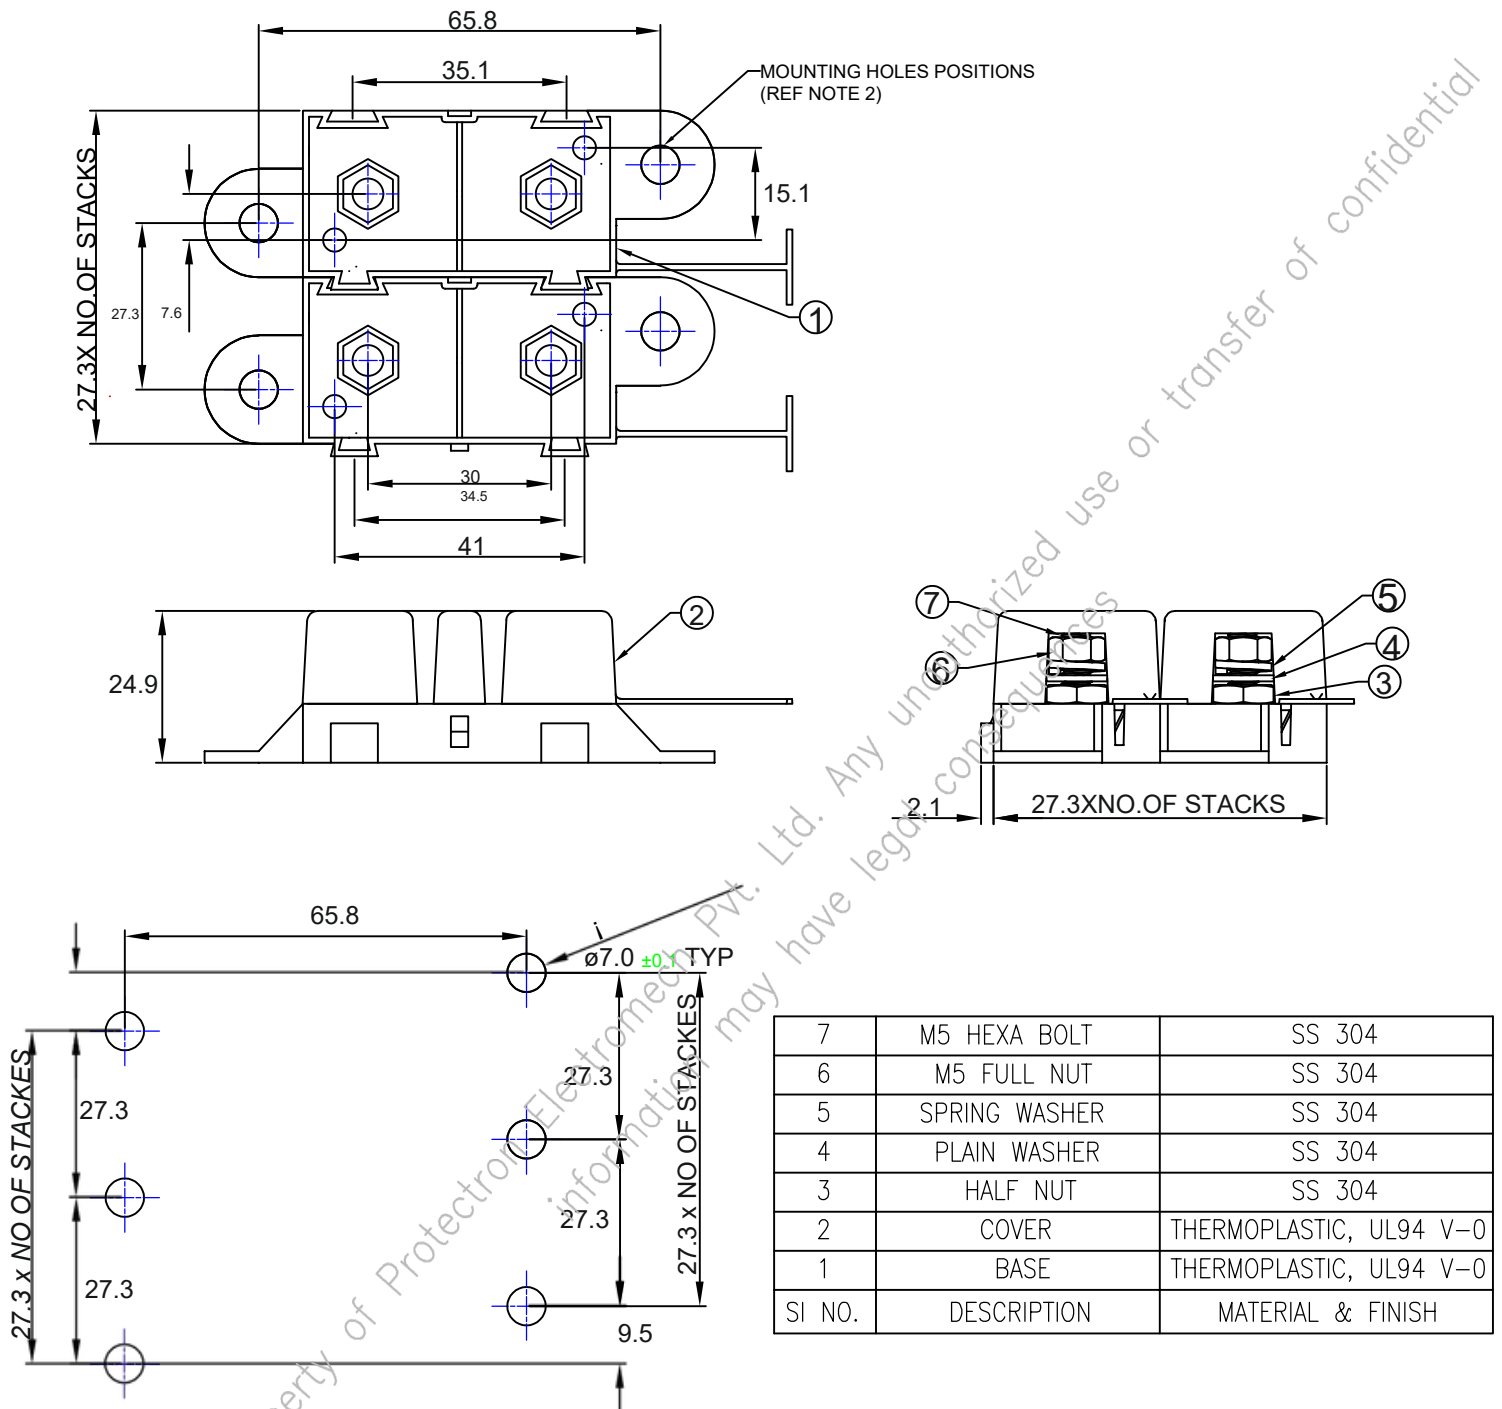

RECOMMENDED MOUNTING LAYOUT
(LAYOUT TOLERANCE $\pm 0.2\text{mm}$)

- NOTE : 1. M5 HEXA BOLT & HEXA NUTS WITH LOCK WASHERS TO BE USED FOR FUSE HOLDING.
2. M6 HEXA SOCKET HEAD BOLT TO BE USED FOR MOUNTING THE FUSE HOLDER, TIGHTENING TORQUE MUST BE 6-7 Nm MAX.

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.5\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.



DESCRIPTION : FUSE HOLDER FOR MIDI BOLT DOWN FUSE, RoHS

PART NO: P803B-03-XX

ORDERING INFORMATION

P803B-03-XX

	BLANK (1 FUSE HOLDER)
XX	NO.OF STACKS (Eg:02- 2 FUSE HOLDERS STACKED)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.5\text{mm}$
 $\pm 2'$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.