


DESCRIPTION : CONNECTOR JACK FOR 1mm MATING NON-INSULATED WITH KNURLING

PART NO: P8102-1X-32

RoHS



PHYSICAL DATA

INNER CLIP : BERYLLIUM COPPER, GOLD PLATED
OUTER SLEEVE : BRASS, SILVER /TIN PLATED

ELECTRICAL DATA


CURRENT RATING : 3 A DC
CONTACT RESISTANCE : 5m OHMS Max.

MECHANICAL DATA

MATING INSERTION FORCE : 450 Gms. Max.
WITHDRAWALL FORCE : 56 Gms. Min.

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -25°C TO +70°C

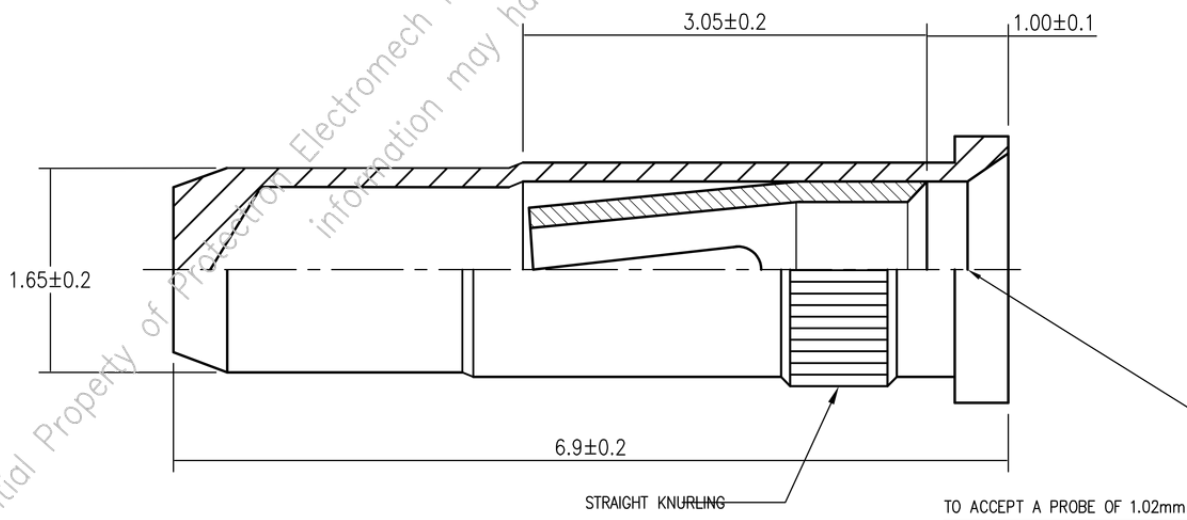

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm
±2'

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.