




DESCRIPTION : DUAL-IN-LINE IC SOCKET 0.3" PITCH
OPEN FRAME, 4 PINS

PART NO: P8053-XX-XX



PHYSICAL DATA

MATERIAL & FINISH:

INSULATOR BODY : GLASS FILLED THERMOPLASTIC
SELF EXTINGUISHING,
RATED UL94 V-0
CONTACT OUTER SLEEVE : SCREW MACHINED, BRASS, GOLD PLATED
OR 5μ TIN-LEAD PLATED OVER NICKEL.
INNER CLIP : BERYLLIUM-COPPER, GOLD OR TIN PLATED

ELECTRICAL DATA

INSULATION RESISTANCE : 5,000 M OHMS @ 500V DC (Min.)
CONTACT RESISTANCE : 20m OHMS (Max.)
CURRENT RATING : 1A
RATED VOLTAGE : 100V AC
VOLTAGE PROOF : 600V AC

MECHANICAL DATA

MECHANICAL LIFE : 50 CYCLES MIN.
INSERTION FORCE : 2N (<0.2Kg.) WITH STEEL PIN DIA 0.41
EXTRACTION FORCE : >0.5N (0.05Kg.) WITH STEEL PIN DIA 0.41

ENVIRONMENTAL DATA

OPERATING TEMP. RANGE : -65°C TO +125°C
RESISTANCE TO SOLDERING HEAT : +260°C, 10 Sec.

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.3mm
±2'


ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.



**DESCRIPTION : DUAL-IN-LINE IC SOCKET 0.3" PITCH
OPEN FRAME, 4 PINS**

PART NO: P8053-XX-XX

INNER CLIP	OUTER SLEEVE	X
Gold	5μ Sn	1
0.75μ Au	5μ Sn	2
5μ Sn	5μ Sn	3
0.75μ Au	Gold	4

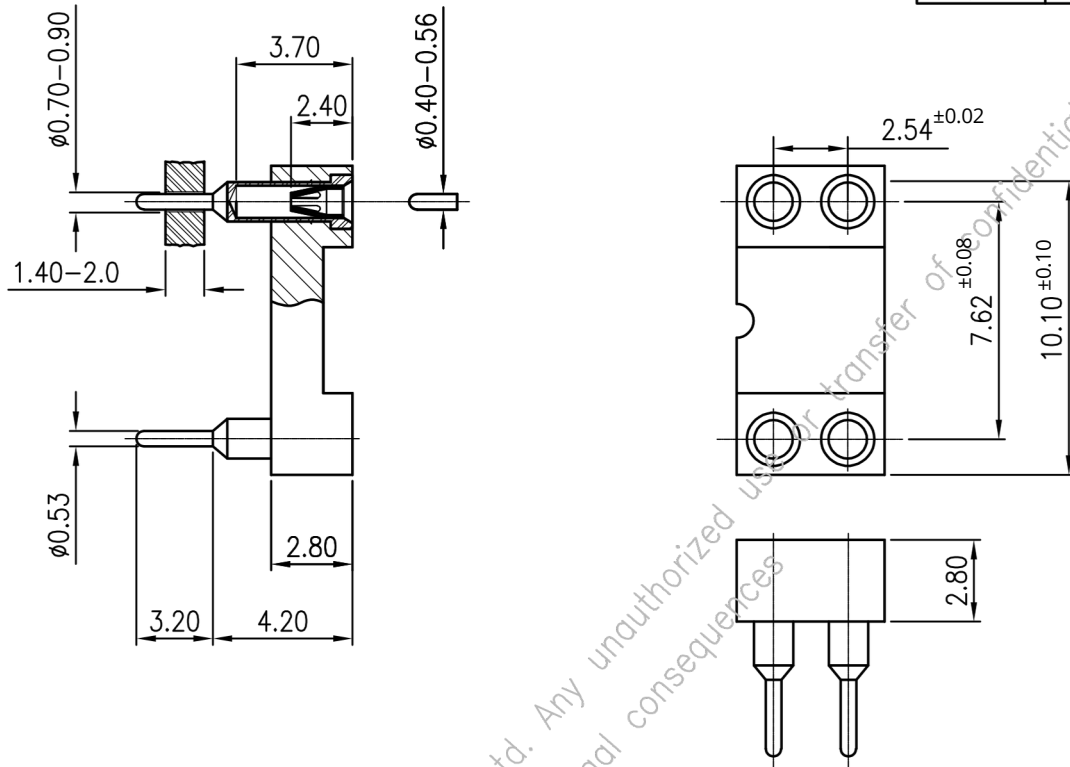

Confidential Property of Protectron Electromech Pvt. Ltd. Any unauthorized use or transfer of confidential information may have legal consequences