


DESCRIPTION : 3.96mm PITCH WAFER, POLARISED(MINIATURE)
STRAIGHT,

PART NO: P9044-29-1X-X

RoHS



PHYSICAL DATA

INSULATION

MATERIAL : NYLON 66

FLAMMABILITY : UL94V-0

COLOR : NATURAL COLOR

CONTACT : BRASS, TIN PLATED

PACKAGING TYPE : BULK PACKING

ELECTRICAL DATA

CURRENT RATING : 7A

INSULATION RESISTANCE : 1000M OHMS MIN

DIELECTRIC WITHSTANDING : 1500V AC/MIN

CONTACT RESISTANCE : 15m OHMS MAX

VOLTAGE RATING : 250V AC/DC


ENVIRONMENTAL DATA

TEMPERATURE RANGE : -25° TO +85° C

PROCESS RATING : 230°C FOR 5SEC

DESCRIPTION : 3.96mm PITCH WAFER, POLARISED(MINIATURE)
STRAIGHT,

PART NO: P9044-29-1X-X

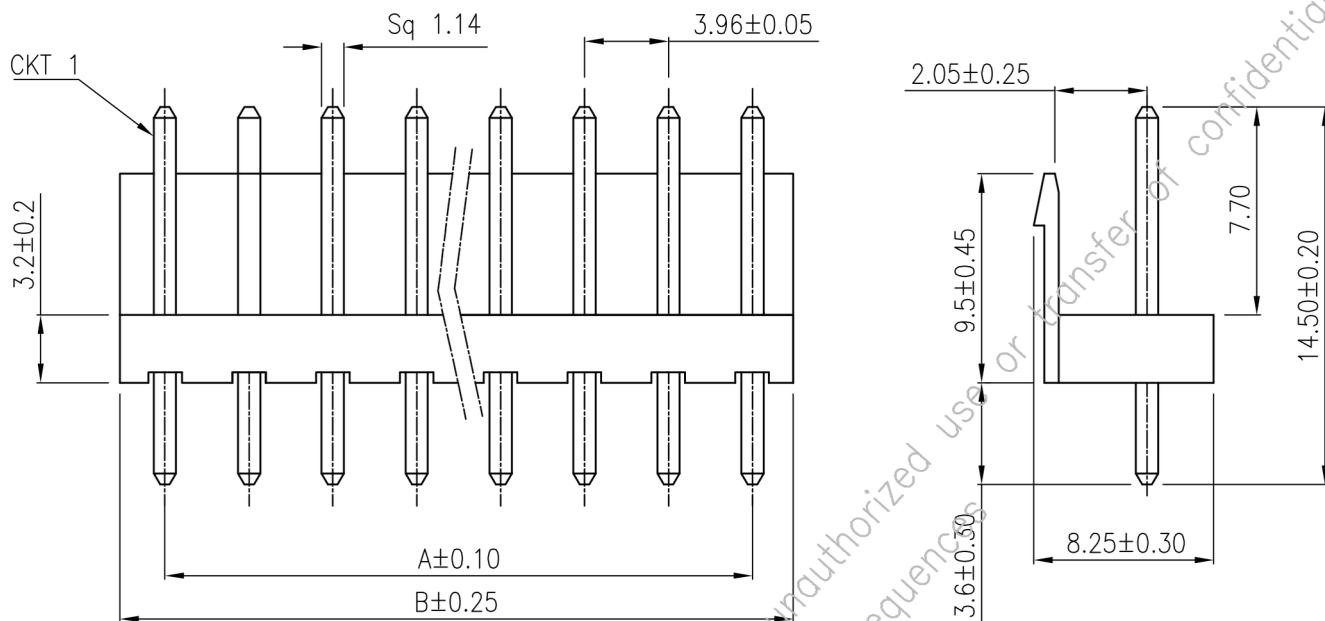

No. OF WAYS	DIMENSIONS	
	A	B
3	7.92	11.82
4	11.88	15.78
5	15.84	19.74
6	19.80	23.70
7	23.76	27.66
8	27.72	31.62
9	31.68	35.58
10	35.64	39.54
11	39.60	43.50
12	43.56	47.46
13	47.52	51.41
14	51.48	55.37
15	55.44	59.33
16	59.40	63.30

ORDERING INFORMATION

P9044-29-1X-X

TYPE OF PLATING

TIN PLATED	9
GOLD PLATED	2

NO.OF CONTACTS
(3-16)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.:±0.13mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.