




DESCRIPTION : TERMINAL HOUSING 3.96mm PITCH POLARISED

PART NO: P9045-29-00-X
X=NO OF CONTACTS(2-16)

RoHS



PHYSICAL DATA

INSULATION

MATERIAL	:	NYLON 66
FLAMMABILITY	:	UL94V-0
COLOR	:	NATURAL COLOR
PACKAGING TYPE	:	BULK PACKING

ELECTRICAL DATA

CURRENT RATING	:	7A
CONTACT RESISTANCE	:	20m OHMS MAX
INSULATION RESISTANCE	:	1000M OHMS MIN
DIELECTRIC WITHSTANDING	:	1500V AC/MIN
VOLTAGE RATING	:	250V AC/DC

ENVIRONMENTAL DATA


TEMPERATURE RANGE	:	-25° TO +85° C
-------------------	---	----------------



PROTECTRON[®]
ELECTROMECH (P) LTD


DESCRIPTION : TERMINAL HOUSING 3.96mm PITCH POLARISED

PART NO: P9045-29-00-X
X=NO OF CONTACTS(2-16)

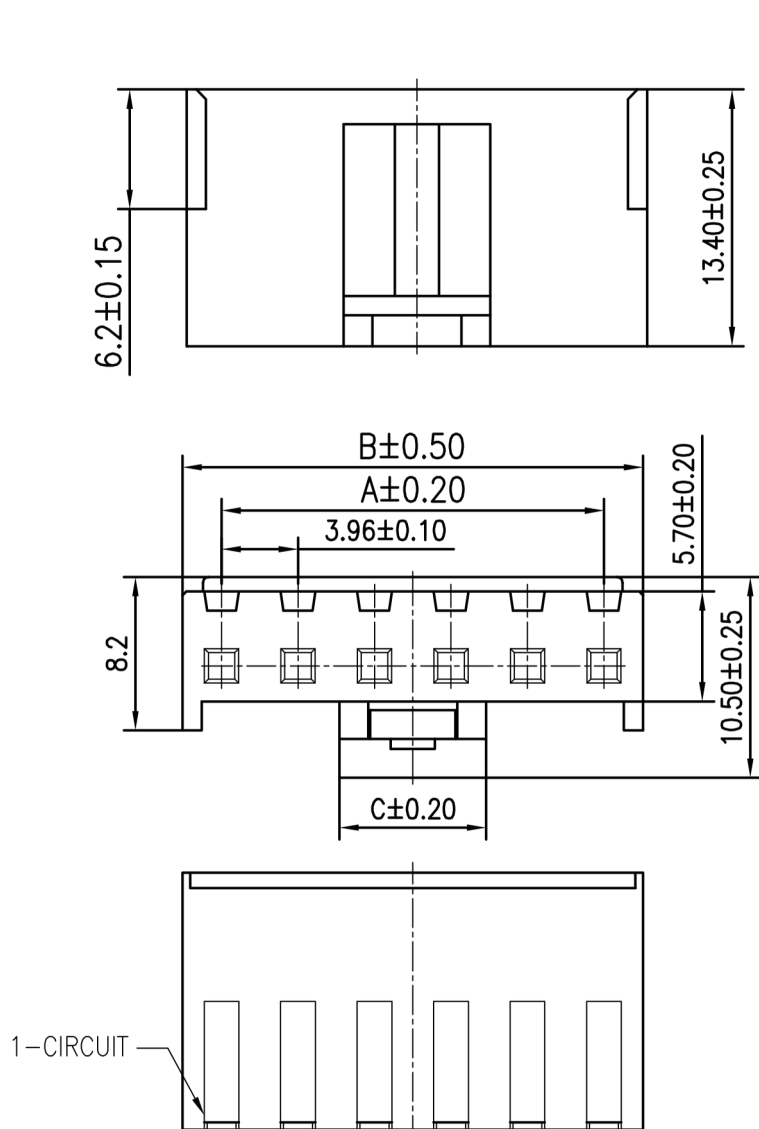

No. OF WAYS	DIMENSIONS			PART NUMBER
	A±0.20	B±0.50	C±0.20	
2	3.96	8.02	3.65	P9045-29-00-2
3	7.92	11.98	7.55	P9045-29-00-3
4	11.88	15.98	7.55	P9045-29-00-4
5	15.84	19.90	7.55	P9045-29-00-5
6	19.80	23.86	7.55	P9045-29-00-6
7	23.76	27.82	7.55	P9045-29-00-7
8	27.72	31.78	7.55	P9045-29-00-8
9	31.68	35.74	7.55	P9045-29-00-9
10	35.64	39.70	7.55	P9045-29-00-A
11	39.60	43.66	7.55	P9045-29-00-B
12	43.56	47.62	7.55	P9045-29-00-C
13	47.52	51.58	7.55	P9045-29-00-D
14	51.48	55.54	7.55	P9045-29-00-E
15	55.44	59.50	7.55	P9045-29-00-F
16	59.40	63.94	7.55	P9045-29-00-G

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.25mm
±2'

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in