


DESCRIPTION : TERMINAL HOUSING 3.96mm PITCH POLARISED

PART NO: P9045-29-00-X
X=NO OF CONTACTS(2-16)

RoHS



PHYSICAL DATA

INSULATION

MATERIAL

:

NYLON 66

FLAMMABILITY

:

UL94V-0

COLOR

:

NATURAL COLOR

PACKAGING TYPE

:

BULK PACKING

ELECTRICAL DATA

CURRENT RATING

:

7A

CONTACT RESISTANCE

:

20m OHMS MAX

INSULATION RESISTANCE

:

1000M OHMS MIN

DIELECTRIC WITHSTANDING

:

1500V AC/MIN

VOLTAGE RATING

:

250V AC/DC

ENVIRONMENTAL DATA

TEMPERATURE RANGE

:


-25° TO +85° C



PROTECTRON[®]
ELECTROMECH (P) LTD


DESCRIPTION : TERMINAL HOUSING 3.96mm PITCH POLARISED

PART NO: P9045-29-00-X
X=NO OF CONTACTS(2-16)

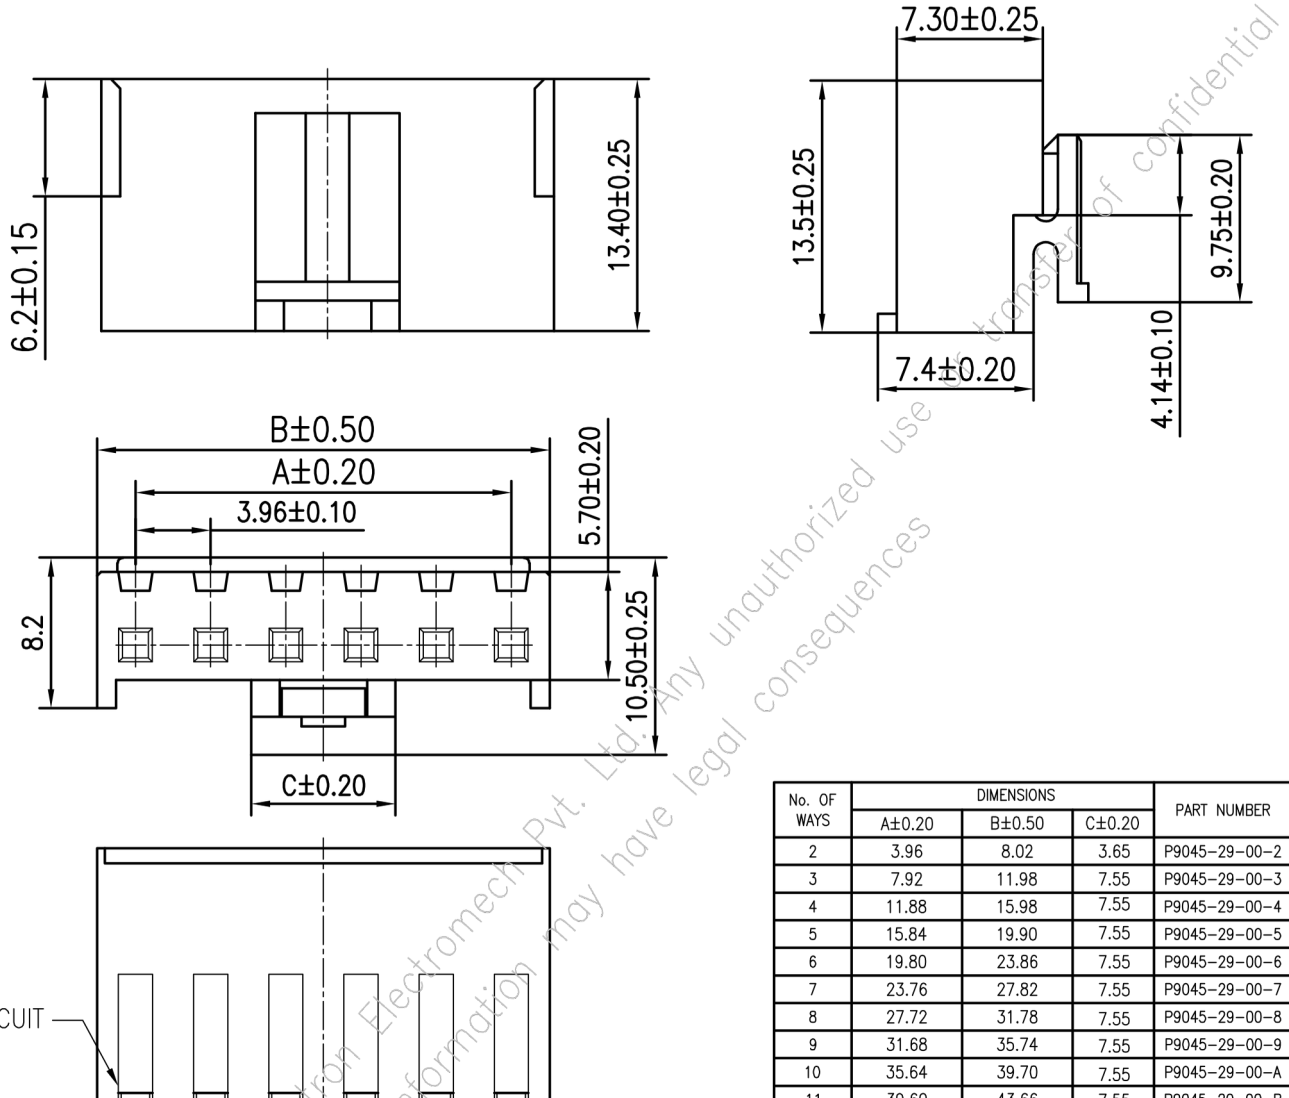

No. OF WAYS	DIMENSIONS			PART NUMBER
	A±0.20	B±0.50	C±0.20	
2	3.96	8.02	3.65	P9045-29-00-2
3	7.92	11.98	7.55	P9045-29-00-3
4	11.88	15.98	7.55	P9045-29-00-4
5	15.84	19.90	7.55	P9045-29-00-5
6	19.80	23.86	7.55	P9045-29-00-6
7	23.76	27.82	7.55	P9045-29-00-7
8	27.72	31.78	7.55	P9045-29-00-8
9	31.68	35.74	7.55	P9045-29-00-9
10	35.64	39.70	7.55	P9045-29-00-A
11	39.60	43.66	7.55	P9045-29-00-B
12	43.56	47.62	7.55	P9045-29-00-C
13	47.52	51.58	7.55	P9045-29-00-D
14	51.48	55.54	7.55	P9045-29-00-E
15	55.44	59.50	7.55	P9045-29-00-F
16	59.40	63.94	7.55	P9045-29-00-G

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.25mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.