




PROTECTRON®
ELECTROMECH (P) LTD

DESCRIPTION: 4.20mm PITCH MINIFIT HOUSING, DOUBLE ROW, WITHOUT NOTCH, RoHS

PART NO: P9049H29-00-X
X=NO. OF CONTACTS

RoHS



PHYSICAL DATA

INSULATION

MATERIAL

: NYLON 66

FLAMMABILITY

: UL94V-2

COLOR

: NATURAL COLOR

ELECTRICAL DATA

CURRENT RATING

: 7A AC/DC

INSULATION RESISTANCE

: 1000MΩ Min.

DIELECTRIC WITHSTANDING

: 1000V AC FOR 1 MINUTE

CONTACT RESISTANCE

: 10mΩ Max.

VOLTAGE RATING

: 600V AC/DC

ENVIRONMENTAL DATA

TEMPERATURE RANGE

: -25° TO +85° C

MATING DETAILS



HOUSING

: P9049H29-00-X-N

CRIMP TERMINAL

: P9049T

DESCRIPTION: 4.20mm PITCH MINIFIT HOUSING, DOUBLE ROW, RoHS **PART NO:** P9049H29-00-X
X=NO. OF CONTACTS

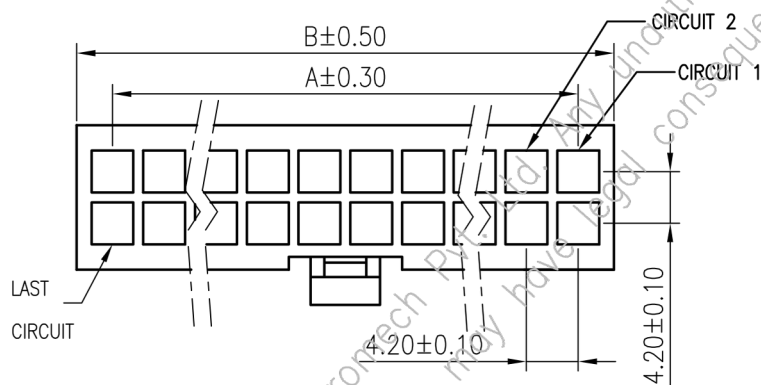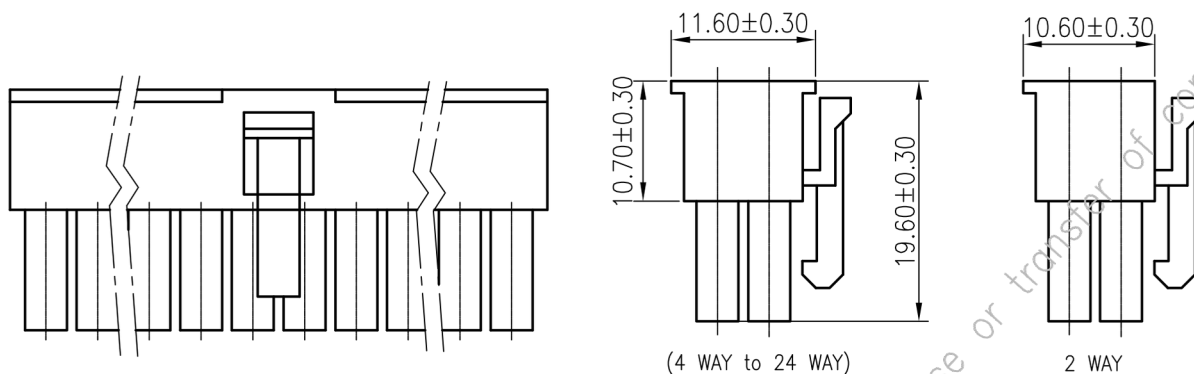

CIRCUIT	PART NO.	DIMENSION	
		A	B
2	P9049H29-00-2	--	5.70
4	P9049H29-00-4	4.20	9.60
6	P9049H29-00-6	8.40	13.80
8	P9049H29-00-8	12.60	18.00
10	P9049H29-00-A	16.80	22.20
12	P9049H29-00-C	21.00	26.40
14	P9049H29-00-E	25.20	30.60
16	P9049H29-00-G	29.40	34.80
18	P9049H29-00-I	33.60	39.00
20	P9049H29-00-K	37.80	43.20
22	P9049H29-00-M	42.00	47.40
24	P9049H29-00-O	46.20	51.60



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.