



DESCRIPTION : 2.54mm PITCH HOUSING

PART NO: P9050H29-00-X
X=NO. OF WAYS(2-20)

RoHS



PHYSICAL

INSULATION	
MATERIAL	: NYLON 66
FLAMMABILITY	: UL94V-2
COLOR	: BEIGE COLOR
PACKAGING TYPE	: BULK PACKING

ELECTRICAL

INSULATION RESISTANCE	: 1000M OHMS MIN
DIELECTRIC WITHSTANDING	: 1000V AC/MIN
CURRENT RATING	: 2.5A AC/DC
VOLTAGE RATING	: 250V AC/DC
CONTACT RESISTANCE	: 20m OHMS MAX

ENVIRONMENTAL DATA

TEMPERATURE RANGE	: -40° TO 105° C
-------------------	------------------






PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm PITCH HOUSING

PART NO: P9050H29-00-X

X=NO. OF WAYS(2-20)

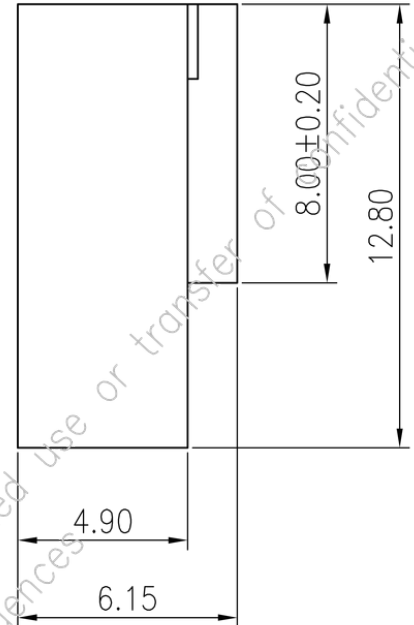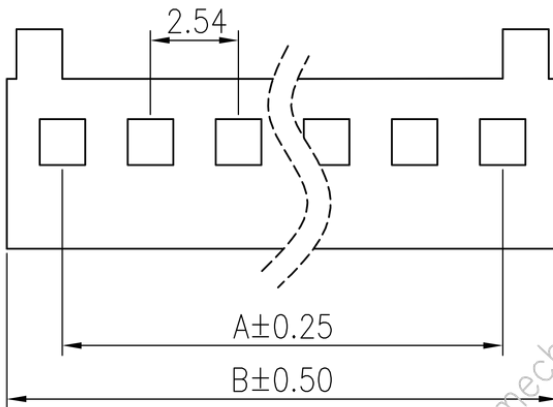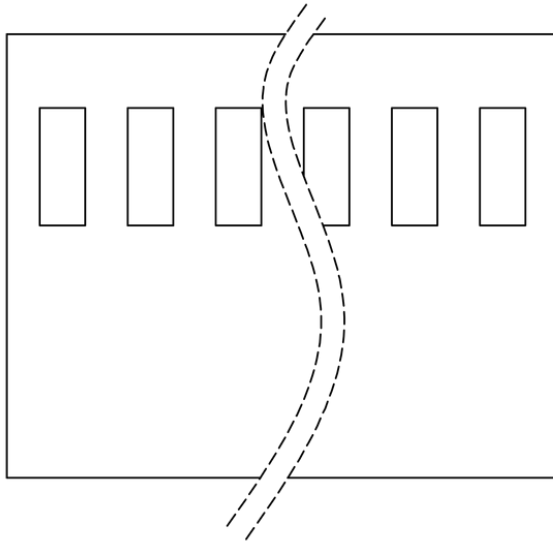

ORDERING INFORMATION

P9050H29-00-X

NO OF WAYS
(2-20)

NO. OF WAYS	DIMENSION		PART NUMBER
	A	B	
2	2.54	5.74	P9050H29-00-2
3	5.08	8.28	P9050H29-00-3
4	7.62	10.82	P9050H29-00-4
5	10.16	13.36	P9050H29-00-5
6	12.70	15.90	P9050H29-00-6
7	15.24	18.44	P9050H29-00-7
8	17.78	20.98	P9050H29-00-8
9	20.32	23.52	P9050H29-00-9
10	22.86	26.06	P9050H29-00-A
11	25.40	28.60	P9050H29-00-B
12	27.94	31.14	P9050H29-00-C
13	30.48	33.68	P9050H29-00-D
14	33.02	36.22	P9050H29-00-E
15	35.56	38.76	P9050H29-00-F
16	38.10	41.30	P9050H29-00-G
17	40.64	43.84	P9050H29-00-H
18	43.18	46.38	P9050H29-00-I
19	45.72	48.92	P9050H29-00-J
20	48.26	51.46	P9050H29-00-K

MATES WITH

ASSOCIATED CONNECTORS:
P9050T / P9050S/R
SERIES

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.25\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in