


DESCRIPTION : 2.54mm PITCH CONNECTOR WAFER WITH RAMP,
OPPOSITE RIGHT ANGLE, RoHS

PART NO:P9050R029-19-X
(X=REFER TABLE)

RoHS

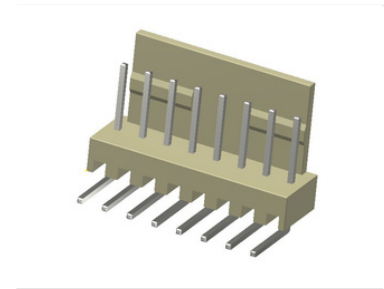

PHYSICAL

MATERIAL

INSULATOR BODY : NYLON 66, UL94V-2
CONTACT : BRASS, TIN PLATED

ELECTRICAL

CURRENT RATING : 3A AC/DC
VOLTAGE RATING : 250V AC/DC
INSULATION RESISTANCE : 1000 M OHMS min
CONTACT RESISTANCE : 10m OHMS max.
DIELECTRIC WITHSTANDING : 1000V AC/minute

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -25° TO +85° C

OTHER FEATURES

ASSOCIATED CONNECTORS : P9050T / P9050H SERIES


DESCRIPTION : 2.54mm PITCH CONNECTOR WAFER WITH RAMP,
OPPOSITE RIGHT ANGLE, RoHS

PART NO:P9050R029-19-X
(X=REFER TABLE)

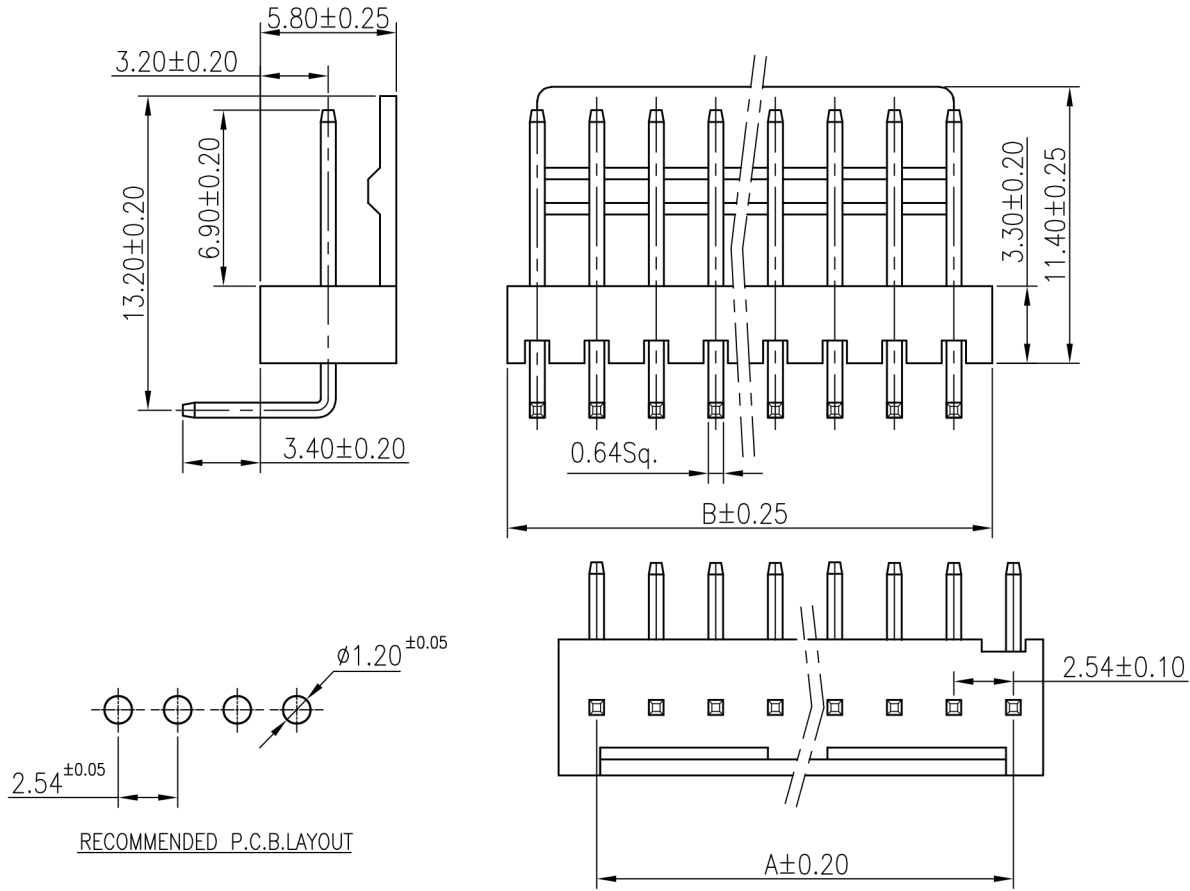

NO. OF WAYS	DIMENSION		PART NUMBER (STRAIGHT)
	A	B	TIN PLATED
2	2.54	5.08	P9050R029-19-2
3	5.08	7.62	P9050R029-19-3
4	7.62	10.16	P9050R029-19-4
5	10.16	12.70	P9050R029-19-5
6	12.70	15.24	P9050R029-19-6
7	15.24	17.78	P9050R029-19-7
8	17.78	20.32	P9050R029-19-8
9	20.32	22.86	P9050R029-19-9
10	22.86	25.40	P9050R029-19-A
11	25.40	27.94	P9050R029-19-B
12	27.94	30.48	P9050R029-19-C
13	30.48	33.02	P9050R029-19-D
14	33.02	35.56	P9050R029-19-E
15	35.56	38.10	P9050R029-19-F
16	38.10	40.64	P9050R029-19-G
17	40.64	43.18	P9050R029-19-H
18	43.18	45.72	P9050R029-19-I
19	45.72	48.26	P9050R029-19-J
20	48.26	50.80	P9050R029-19-K

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.:±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.