


DESCRIPTION : PH CONNECTOR 2.0mm PITCH, STRAIGHT

PART NO: P9057S29-19-X
X= NO.OF CONTACTS

RoHS



PHYSICAL DATA

INSULATION
MATERIAL : THERMOPLASTIC
FLAMMABILITY : UL94V-0
CONTACT : COPPER ALLOY, GOLD PLATING

ELECTRICAL DATA

CURRENT RATING : 1A
INSULATION RESISTANCE : 1000M Ω MIN
CONTACT RESISTANCE : 20m Ω MAX
WITHSTANDING VOLTAGE : 800V AC/MINUTE
VOLTAGE RATING : 100V AC,DC




ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40°C TO +105°C



DESCRIPTION : PH CONNECTOR 2.0mm PITCH, STRAIGHT

PART NO: P9057S29-19-X
X= NO.OF CONTACTS

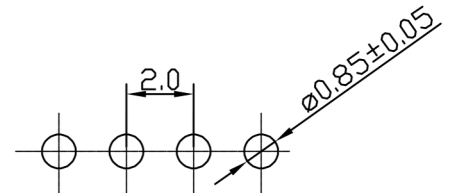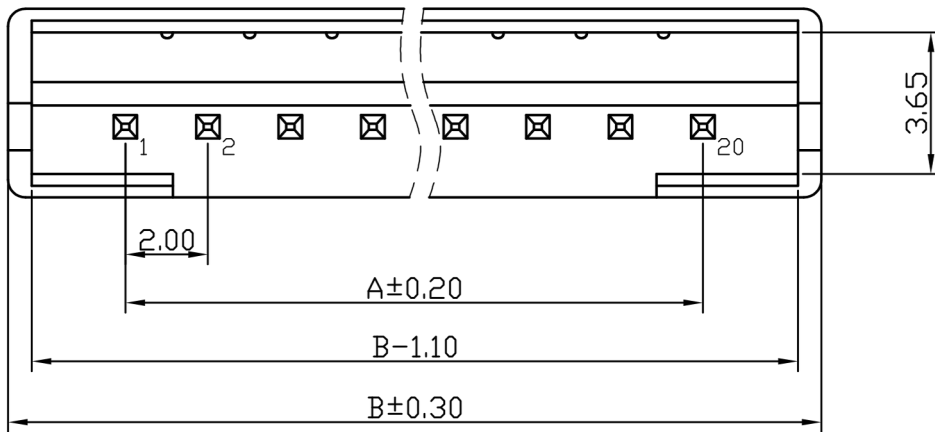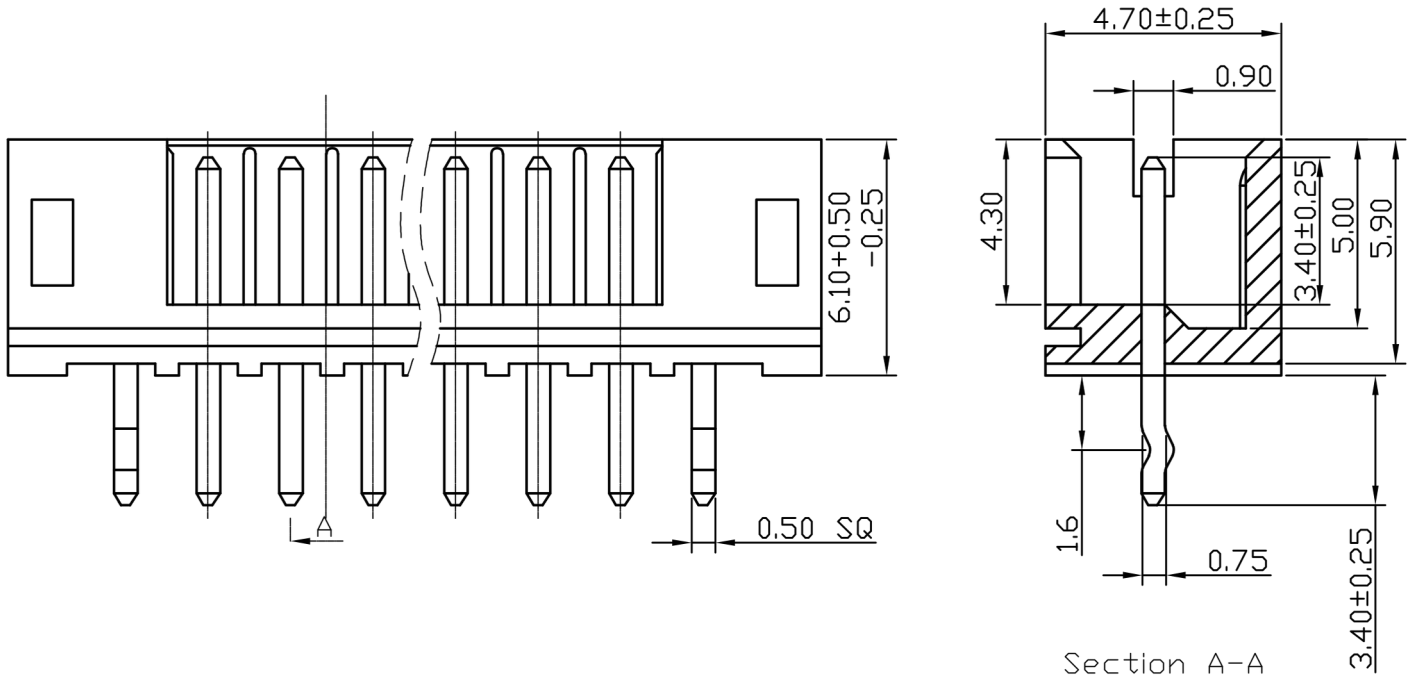


RECOMMENDED P.C.B LAYOUT
PCB TOLERANCE ±0.05

DESCRIPTION : PH CONNECTOR 2.0mm PITCH, STRAIGHT

PART NO: P9057S29-19-X
 X= NO.OF CONTACTS

NO. OF WAYS	DIMENSION		PART NUMBER
	A	B	
2	2.00	6.00	P9057S29-19-2
3	4.00	8.00	P9057S29-19-3
4	6.00	10.00	P9057S29-19-4
5	8.00	12.00	P9057S29-19-5
6	10.00	14.00	P9057S29-19-6
7	12.00	16.00	P9057S29-19-7
8	14.00	18.00	P9057S29-19-8
9	16.00	20.00	P9057S29-19-9
10	18.00	22.00	P9057S29-19-A
11	20.00	24.00	P9057S29-19-B
12	22.00	26.00	P9057S29-19-C
13	24.00	28.00	P9057S29-19-D
14	26.00	30.00	P9057S29-19-E
15	28.00	32.00	P9057S29-19-F
16	30.00	34.00	P9057S29-19-G
17	32.00	36.00	P9057S29-19-H
18	34.00	38.00	P9057S29-19-I
19	36.00	40.00	P9057S29-19-J
20	38.00	42.00	P9057S29-19-K

Projection:



Scale: NTS

Sht. Size: A4

 Gen. Tol.: ±0.35mm
 ±2°

 ALL DIMENSIONS ARE IN MM.
 IF UNLESS OTHERWISE SPECIFIED.