

DESCRIPTION : PH CONNECTOR 2.0mm PITCH, STRAIGHT

PART NO: P9057S29-19-X
X= NO.OF CONTACTS

RoHS



PHYSICAL DATA

INSULATION	
MATERIAL	: THERMOPLASTIC
FLAMMABILITY	: UL94V-0
CONTACT	: COPPER ALLOY, GOLD PLATING

ELECTRICAL DATA

CURRENT RATING	: 1A
INSULATION RESISTANCE	: 1000MΩ MIN
CONTACT RESISTANCE	: 20mΩ MAX
WITHSTANDING VOLTAGE	: 800V AC/MINUTE
VOLTAGE RATING	: 100V AC,DC




ENVIRONMENTAL DATA

TEMPERATURE RANGE	: -40°C TO +105°C
-------------------	-------------------

DESCRIPTION : PH CONNECTOR 2.0mm PITCH, STRAIGHT

PART NO: P9057S29-19-X

X= NO.OF CONTACTS

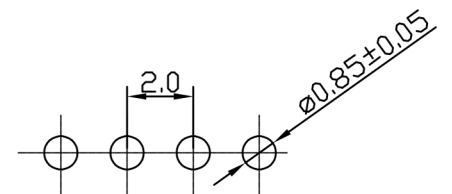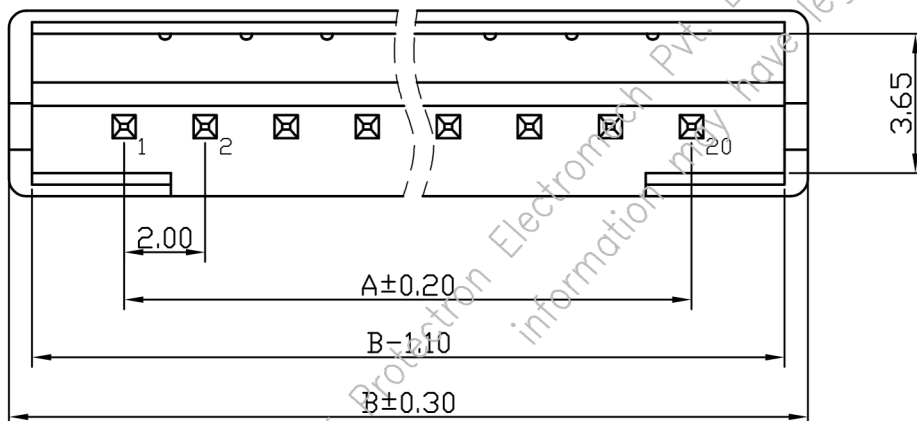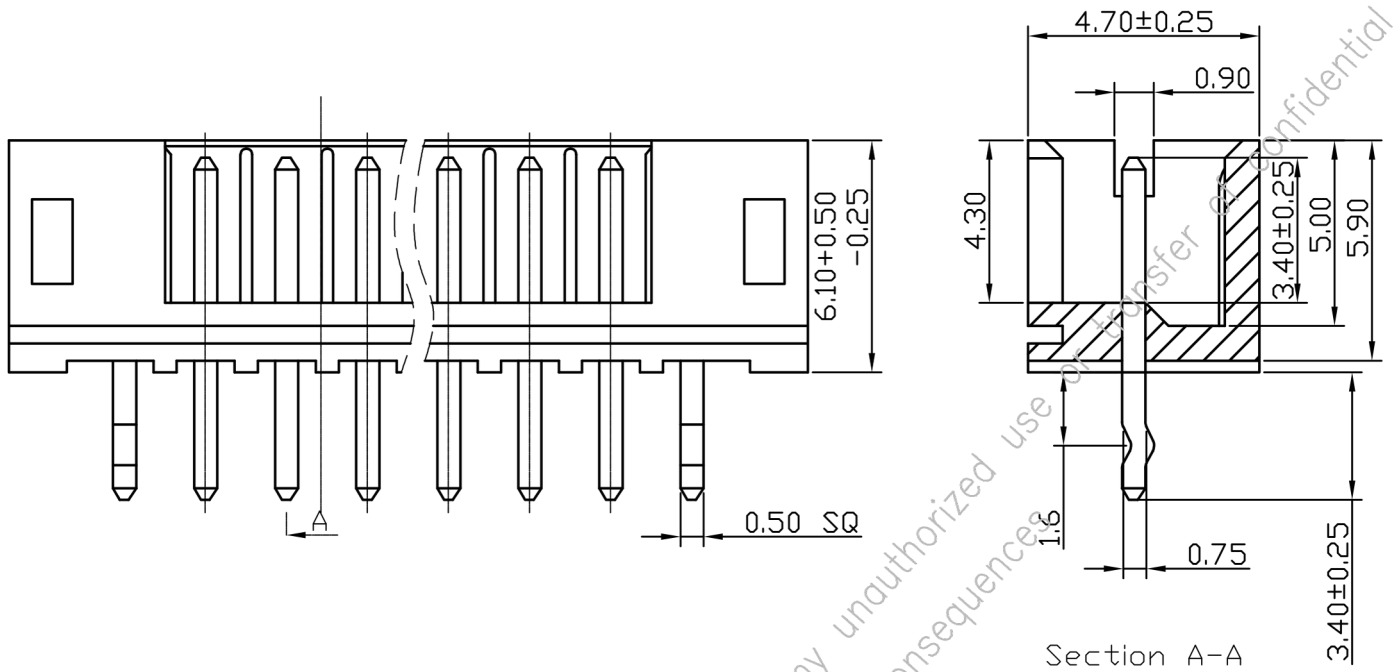

RECOMMENDED P.C.B LAYOUT
PCB TOLERANCE ± 0.05



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : PH CONNECTOR 2.0mm PITCH, STRAIGHT

PART NO: P9057S29-19-X
X= NO.OF CONTACTS

NO. OF WAYS	DIMENSION		PART NUMBER
	A	B	
2	2.00	6.00	P9057S29-19-2
3	4.00	8.00	P9057S29-19-3
4	6.00	10.00	P9057S29-19-4
5	8.00	12.00	P9057S29-19-5
6	10.00	14.00	P9057S29-19-6
7	12.00	16.00	P9057S29-19-7
8	14.00	18.00	P9057S29-19-8
9	16.00	20.00	P9057S29-19-9
10	18.00	22.00	P9057S29-19-A
11	20.00	24.00	P9057S29-19-B
12	22.00	26.00	P9057S29-19-C
13	24.00	28.00	P9057S29-19-D
14	26.00	30.00	P9057S29-19-E
15	28.00	32.00	P9057S29-19-F
16	30.00	34.00	P9057S29-19-G
17	32.00	36.00	P9057S29-19-H
18	34.00	38.00	P9057S29-19-I
19	36.00	40.00	P9057S29-19-J
20	38.00	42.00	P9057S29-19-K

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.35\text{mm}$
 $\pm 2'$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.