


DESCRIPTION : TERMINAL HOUSING 2.50mm PITCH FOR SHROUDED HEADER.

PART NO: P9060H29-00-X
X=NO. OF WAYS

RoHS



PHYSICAL DATA

INSULATION	
MATERIAL	: NYLON 66
FLAMMABILITY	: UL94V-0
COLOR	: BEIGE
PACKAGING TYPE	: STANDARD PACKING

ELECTRICAL DATA

CURRENT RATING	: 3A
INSULATION RESISTANCE	: 1000M OHMS MIN
DIELECTRIC WITHSTANDING	: 1000VAC For 1minute
CONTACT RESISTANCE	: 20m OHMS MAX
VOLTAGE RATING	: 250V AC/DC

ENVIRONMENTAL DATA



OPERATING TEMPERTURE	: -25° TO +85° C
----------------------	------------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : TERMINAL HOUSING 2.50mm PITCH FOR SHROUDED HEADER.

PART NO: P9060H29-00-X
X=NO. OF WAYS

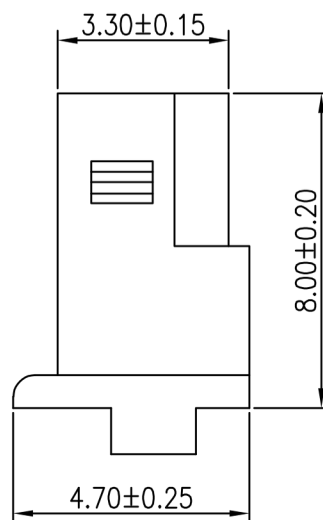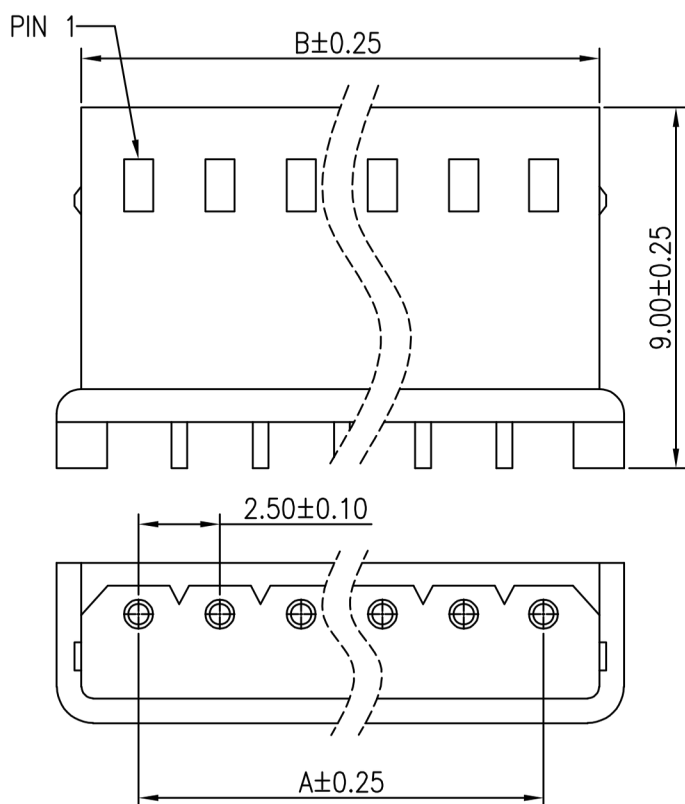

MATES WITH
P9060T – TERMINAL
P9060S – WAFER

CIRCUIT	DIM.A	DIM.B
2	2.50	5.80
3	5.00	8.30
4	7.50	10.80
5	10.00	13.30
6	12.50	15.80
7	15.00	18.30
8	17.50	20.80
9	20.00	23.30
A=10	22.50	25.80
B=11	25.00	28.30
C=12	27.50	30.80
D=13	30.00	33.30
E=14	32.50	35.80
F=15	35.00	38.30
G=16	37.50	40.80

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.