




**DESCRIPTION** : 2.5mm PITCH SHROUDED WAFER, RIGHT ANGLE  
ROUND PIN, RoHS

**PART NO:** P9060R29-19-X  
(X=NO. OF CONTACTS)

RoH

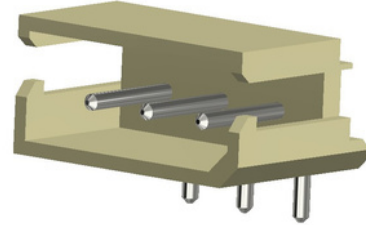

## PHYSICAL DATA

INSULATION

MATERIAL : NYLON66, PANTONE COLOR(7506C)

FLAMMABILITY : UL94V-0

CONTACT : COPPER ALLOY, TIN PLATED

## ELECTRICAL DATA

CURRENT RATING : 3A AC/DC

INSULATION RESISTANCE : 1000M $\Omega$  MIIN.

DIELECTRIC WITHSTANDING : 800V AC FOR 1min

CONTACT RESISTANCE : 20m $\Omega$  Max.

VOLTAGE RATING : 250V AC/DC

## ENVIRONMENTAL DATA

TEMPERATURE RANGE : -25° TO +85°C





SOLDERING TEMPERATURE : 260°C FOR 5 SEC



**PROTECTRON<sup>®</sup>**  
ELECTROMECH (P) LTD

**DESCRIPTION :** 2.5mm PITCH SHROUDED WAFER, RIGHT ANGLE  
ROUND PIN, RoHS

**PART NO:** P9060R29-19-X  
(X=NO. OF CONTACTS)

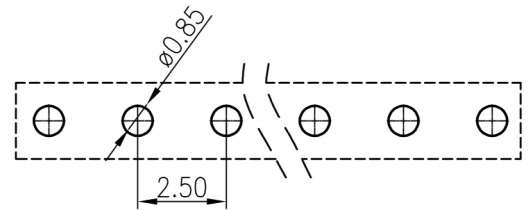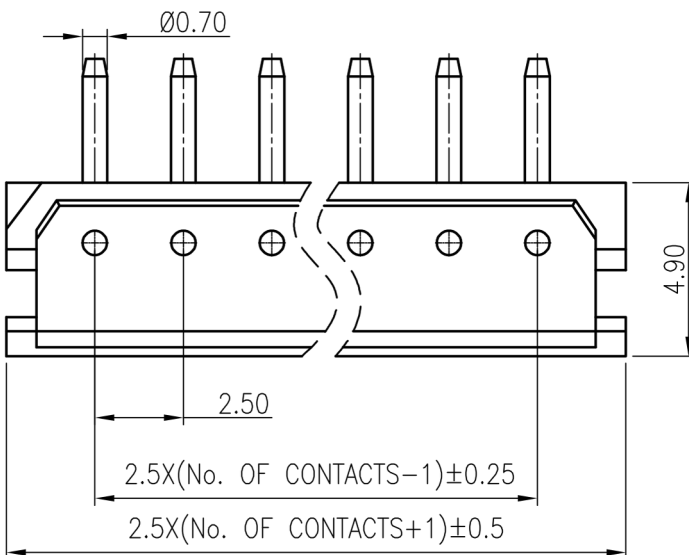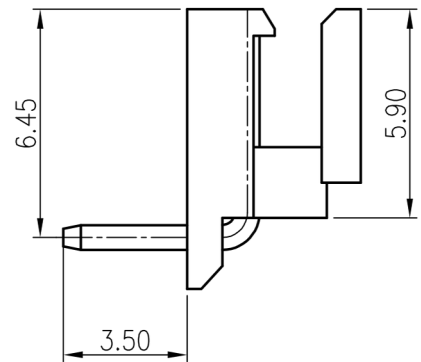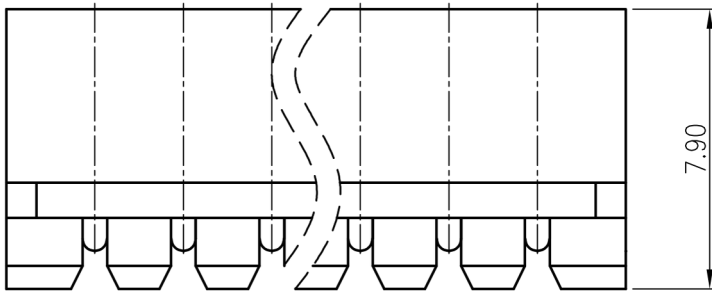

**RECOMMENDED PCB LAYOUT**  
(PCB TOLERANCE ±0.05)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.  
IF UNLESS OTHERWISE SPECIFIED.