




DESCRIPTION : 2.5mm PITCH SHROUDED WAFER, RIGHT ANGLE
ROUND PIN, RoHS

PART NO: P9060R29-19-X
(X=NO. OF CONTACTS)



PHYSICAL DATA

INSULATION

MATERIAL : NYLON66, PANTONE COLOR(7506C)

FLAMMABILITY : UL94V-0

CONTACT : COPPER ALLOY, TIN PLATED

ELECTRICAL DATA

CURRENT RATING : 3A AC/DC

INSULATION RESISTANCE : 1000M Ω MIIN.

DIELECTRIC WITHSTANDING : 800V AC FOR 1min

CONTACT RESISTANCE : 20m Ω Max.

VOLTAGE RATING : 250V AC/DC

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -25° TO +85°C





SOLDERING TEMPERATURE : 260°C FOR 5 SEC



PROTECTRON[®]
ELECTROMECH (P) LTD


DESCRIPTION : 2.5mm PITCH SHROUDED WAFER, RIGHT ANGLE
ROUND PIN, RoHS

PART NO: P9060R29-19-X
(X=NO. OF CONTACTS)

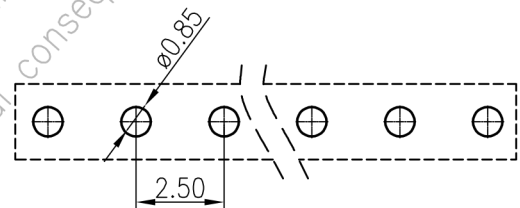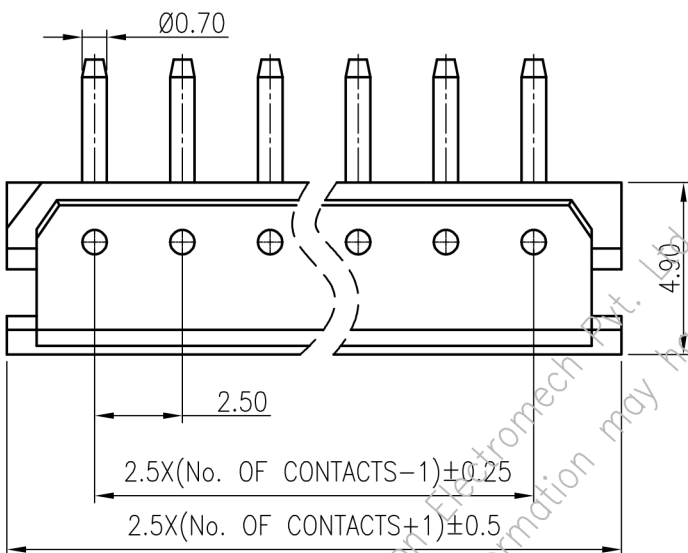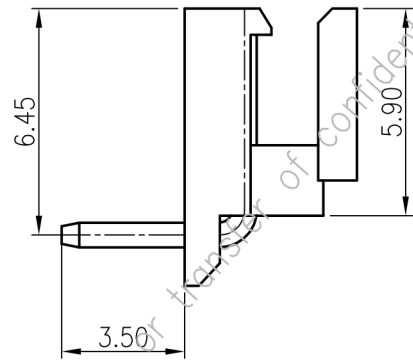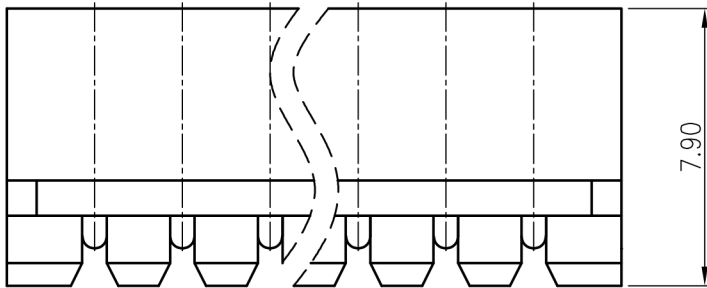

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ±0.05)

Projection:



Scale: **NTS**

Sht. Size: **A4**

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.