




PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : EH CONNECTOR , 2.5MM PITCH,
STRAIGHT, ROHS

PART NO: P9064S29-19-X
X=NO. OF WAYS

RoHS



PHYSICAL DATA

INSULATION

MATERIAL

:

NYLON 66

FLAMMABILITY

:

UL94V-0

PIN MATERIAL

:

COPPER ALLOY, TIN PLATED

ELECTRICAL DATA

CURRENT RATING

:

3A AC ,DC

INSULATION RESISTANCE

:

1000M OHMS MIN.

DIELECTRIC WITHSTANDING

:

800V AC/MINUTE

CONTACT RESISTANCE

:

20m OHMS MAX.

VOLTAGE RATING

:

250V, AC/DC

ENVIRONMENTAL DATA

OPERATING TEMPERATURE

:




-25° TO +85° C




PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : EH CONNECTOR , 2.5MM PITCH,
STRAIGHT, ROHS

PART NO: P9064S29-19-X
X=NO. OF WAYS

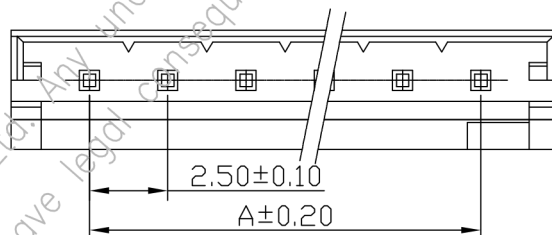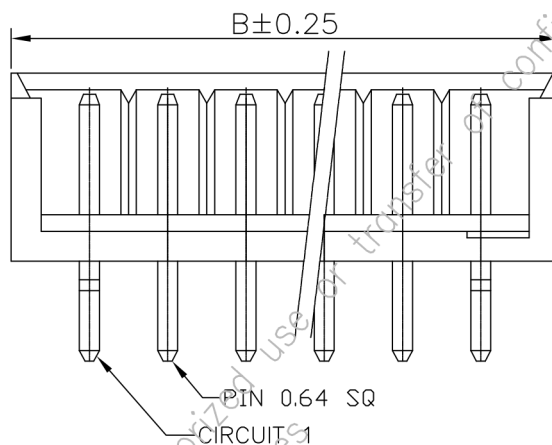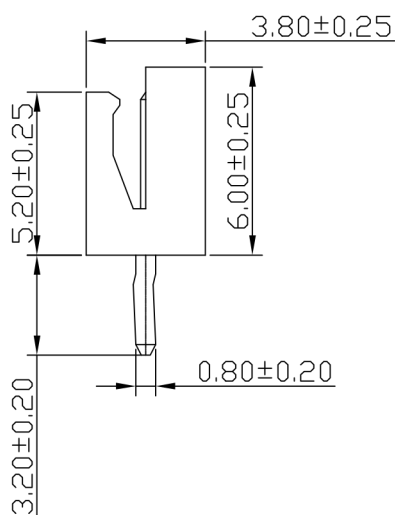

PART NO.	DIMENSIONS	
	A	B
P9064S29-19-2	2.50	7.50
P9064S29-19-3	5.00	10.00
P9064S29-19-4	7.50	12.50
P9064S29-19-5	10.00	15.00
P9064S29-19-6	12.50	17.50
P9064S29-19-7	15.00	20.00
P9064S29-19-8	17.50	22.50
P9064S29-19-9	20.00	25.00
P9064S29-19-A	22.50	27.50
P9064S29-19-B	25.00	30.00
P9064S29-19-C	27.50	32.50
P9064S29-19-D	30.00	35.00
P9064S29-19-E	32.50	37.50
P9064S29-19-F	35.00	40.00

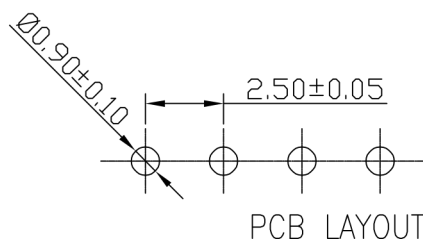

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.