



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : RECEPTACLE HOUSING, 3.0mm PITCH, MICROFIT,
DOUBLE ROW, RoHS

PART NO:P9066H20-00-X
(X=REFER TABLE)

RoHS



PHYSICAL

INSULATION
MATERIAL : NYLON66
FLAMMABILITY : UL94V-2
COLOR : NATURAL

ELECTRICAL

CURRENT RATING : 5A AC/DC
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 1500V AC/minute
CONTACT RESISTANCE : 10m OHMS MAX
VOLTAGE RATING : 250V AC,DC

ENVIRONMENTAL DATA




TEMPERATURE RANGE : -25° TO +85° C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : RECEPTACLE HOUSING, 3.0mm PITCH, MICROFIT,
DOUBLE ROW, RoHS

PART NO:P9066H20-00-X
(X=REFER TABLE)

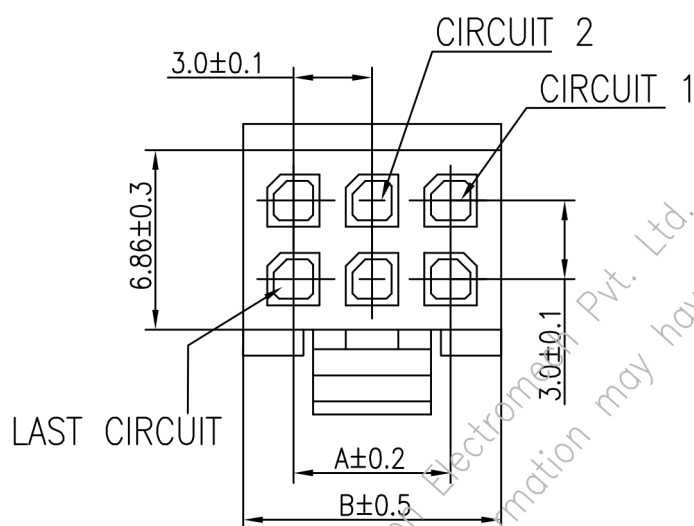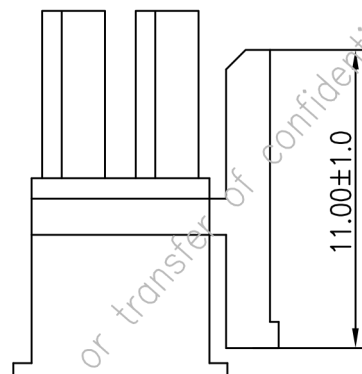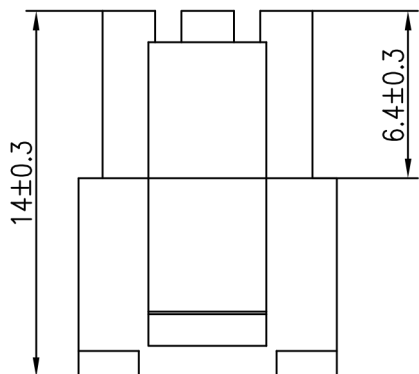

CIRCUITS	DIM. A	DIM.B	PART NUMBER
2	--	3.85	P9066H20-00-2
4	3.00	6.85	P9066H20-00-4
6	6.00	9.85	P9066H20-00-6
8	9.00	12.85	P9066H20-00-8
10	12.00	15.85	P9066H20-00-A
12	15.00	18.85	P9066H20-00-C
14	18.00	21.85	P9066H20-00-E
16	21.00	24.85	P9066H20-00-G
18	24.00	27.85	P9066H20-00-I
20	27.00	30.85	P9066H20-00-K
22	30.00	33.85	P9066H20-00-M
24	33.00	36.85	P9066H20-00-O

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.:±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.