



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION: 3.00mm MICROFIT WAFER, SURFACE MOUNT,
DOUBLE ROW, RoHS

PART NO: P9066M20-19-XR
X= NO. OF CONTACTS

RoHS



PHYSICAL DATA

INSULATOR BODY : LCP
CONTACT : BRASS/TIN PLATED

ELECTRICAL DATA





CURRENT RATING : 5A AC/DC
VOLTAGE RATING : 250V AC/DC
INSULATION RESISTANCE : 1000M OHMS MIN.
CONTACT RESISTANCE : 20mΩ Max.
DIELECTRIC WITHSTANDING : 1500V AC/minute

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -25°C TO +85° C

DESCRIPTION: 3.00mm MICROFIT WAFER, SURFACE MOUNT,
DOUBLE ROW, RoHS

PART NO:	P9066M20-19-XR
	X= NO. OF CONTACTS

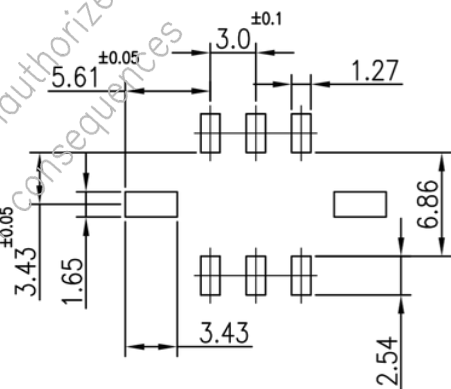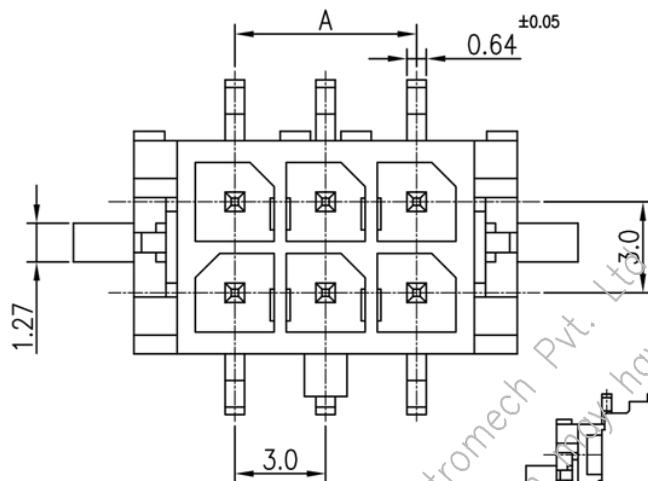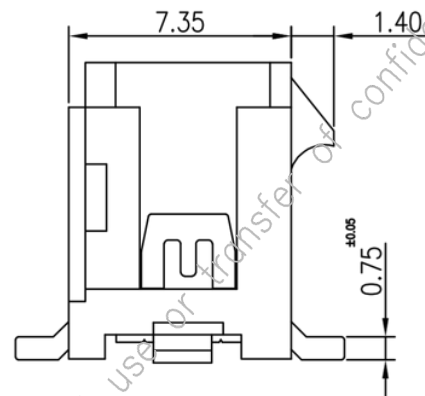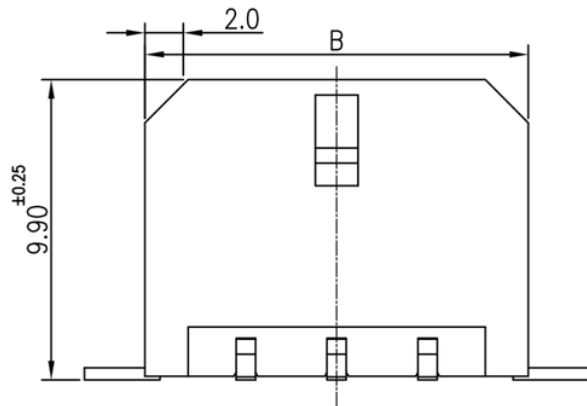

PCB LAYOUT
COMPONENT SIDE



WITH DISPOSABLE CAP

CIRCUITS	DIM. A	DIM.B	PART NUMBER
2	--	6.65	99921502-01
4	3.00	9.65	99921504-01
6	6.00	12.65	99921506-01
8	9.00	15.65	99921508-01
10	12.00	18.65	99921510-01
12	15.00	21.65	99921512-01
14	18.00	24.65	99921514-01
16	21.00	27.65	99921516-01
18	24.00	30.65	99921518-01
20	27.00	33.65	99921520-01
22	30.00	36.65	99921522-01
24	33.00	39.65	99921524-01



Scale: NTS

Sht. Size: **A4**

Gen. Tol.: $\pm 0.30\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.