

DESCRIPTION : PLUG HOUSING 3.00mm PITCH MICRO-FIT
CONNECTOR, DOUBLE ROW

PART NO: P9066PH20-00-X
X=NO. OF WAYS(2-24)

RoHS



PHYSICAL DATA

INSULATION
MATERIAL : PBT 30% GF

ELECTRICAL DATA

CURRENT RATING : 5A AC/DC
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 1500V AC/MINUTE
CONTACT RESISTANCE : 10m OHMS MAX.
VOLTAGE RATING : 250V AC/DC

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -25°C TO +85°C

FEATURES:



MATES WITH P9066T SERIES TERMINAL, P9066S/R SERIES HEADER




PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : PLUG HOUSING 3.00mm PITCH MICRO-FIT
CONNECTOR, DOUBLE ROW


PART NO: P9066PH20-00-X
X=NO. OF WAYS(2-24)

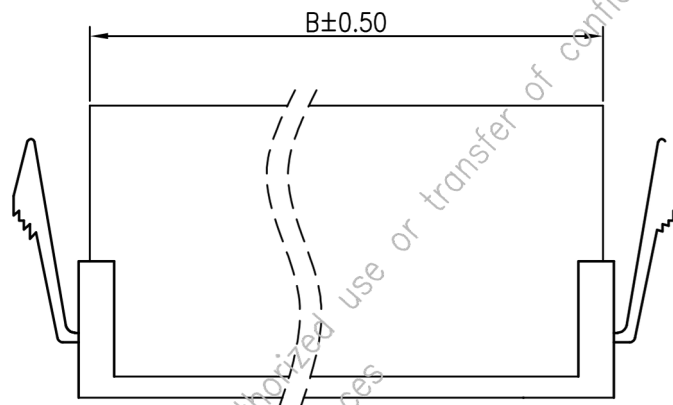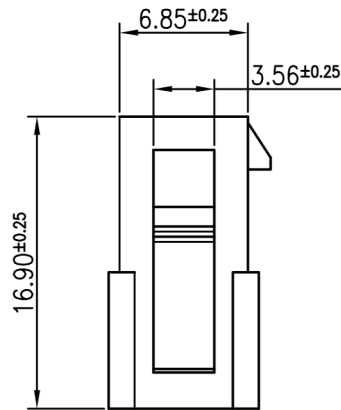

DIM. A	DIM.B	PART NUMBER
---	3.85	P9066PH20-00-2
3.00	6.85	P9066PH20-00-4
6.00	9.85	P9066PH20-00-6
9.00	12.85	P9066PH20-00-8
12.00	15.85	P9066PH20-00-A
15.00	18.85	P9066PH20-00-C
18.00	21.85	P9066PH20-00-E
21.00	24.85	P9066PH20-00-G
24.00	27.85	P9066PH20-00-I
27.00	30.85	P9066PH20-00-K
30.00	33.85	P9066PH20-00-M
33.00	36.85	P9066PH20-00-O

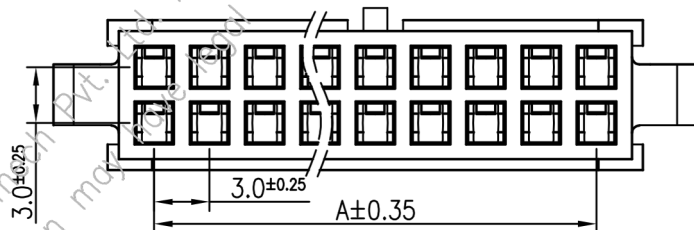

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.