




DESCRIPTION : 2.00mm PITCH PHD CONNECTOR DUAL ROW
RIGHT ANGLE

PART NO: P9069R29-19-XX

RoHS



PHYSICAL DATA

INSULATOR BODY : NYLON66, UL 94V-0 BEIGE COLOUR
CONTACT : COPPER ALLOY, TIN PLATING

ELECTRICAL DATA

CURRENT RATING : 3A
CONTACT RESISTANCE : 10m OHMS MAX
INSULATION RESISTANCE : 1000M OHMS MIN
DIELECTRIC WITHSTANDING : 800V AC FOR ONE MINUTE

ENVIRONMENTAL DATA





TEMPERATURE RANGE : -25°C TO +85°C
PROCESS RATING : 230°C FOR 5 SEC



PROTECTRON[®]
ELECTROMECH (P) LTD


DESCRIPTION : 2.00mm PITCH PHD CONNECTOR DUAL ROW
RIGHT ANGLE

PART NO: P9069R29-19-XX

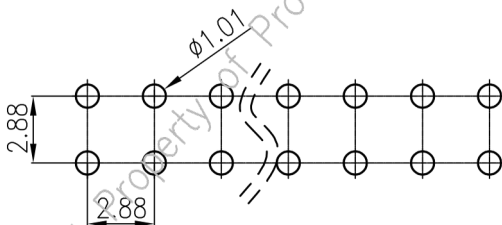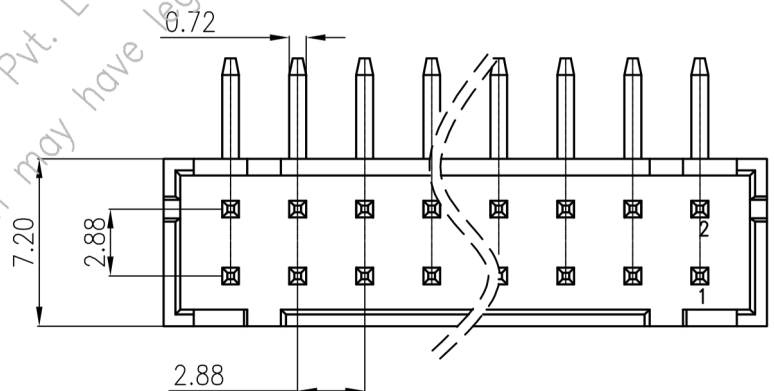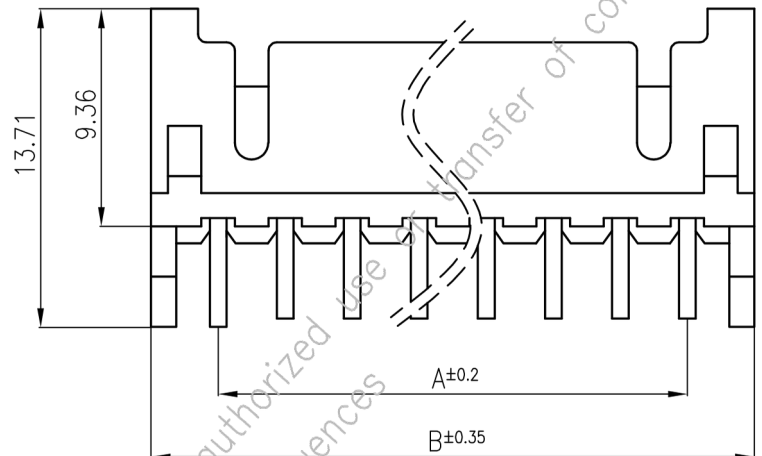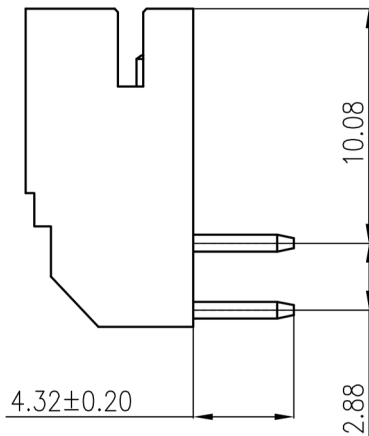

RECOMMENDED PCB LAYOUT
(TOLERANCE: ± 0.05)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.5\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

<http://www.protectron.in>

protectron@protectron.in



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 2.00mm PITCH PHD CONNECTOR DUAL ROW
RIGHT ANGLE

PART NO: P9069R29-19-XX

NO.OF CONTACTS	A	B
4	2.00	6.00
6	4.00	8.00
8	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
26	24.00	28.00
28	26.00	30.00
30	28.00	32.00
32	30.00	34.00
34	32.00	36.00
36	34.00	38.00
38	36.00	40.00
40	38.00	42.00

ORDERING INFORMATION

P9069R29-19-XX

**NO.OF CONTACTS
(4-60)**

MATES WITH

P9069H- HOUSING

P9069T- TERMINAL

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.5\text{mm}$
 $\pm 2'$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.