



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : HOUSING FOR 2.54mm PITCH SHROUDED WAFER, **PART NO:** P9072H20-00-X
CRIMP TYPE X=NO. OF WAYS

RoHS



PHYSICAL DATA

INSULATION	
MATERIAL	: PBT
FLAMMABILITY	: UL94V-0
COLOR	: BLACK COLOR
PACKAGING TYPE	: STANDARD



ELECTRICAL DATA

CURRENT RATING	: 2.5A
INSULATION RESISTANCE	: 1000M OHMS MIN
VOLTAGE RATING	: 250V AC/DC
VOLTAGE PROOF	: 800V AC/MIN

ENVIRONMENTAL DATA

TEMPERATURE RANGE	: -25° TO +85° C
SOLDERING TEMPERATURE	: 230°C FOR 5SEC

DESCRIPTION : HOUSING FOR 2.54mm PITCH SHROUDED WAFER, **PART NO:** P9072H20-00-X
 CRIMP TYPE X=NO. OF WAYS

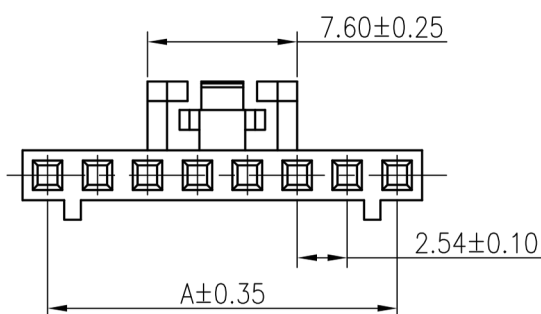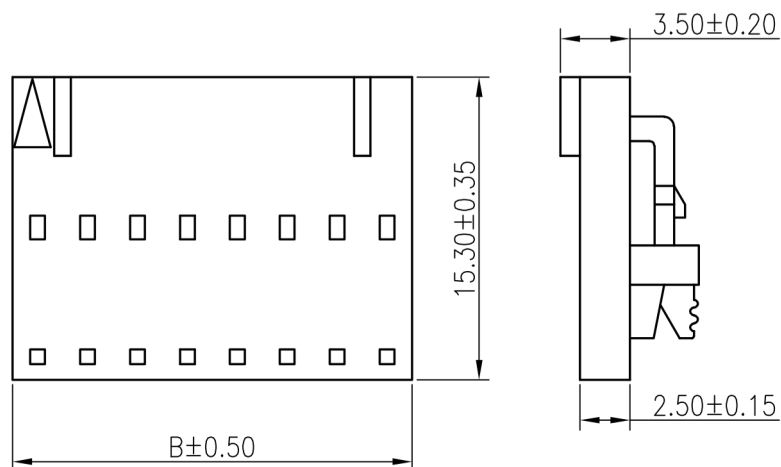

PART NO.	Dimensions	
	A	B
P9072H20-00-2	2.54	5.20
P9072H20-00-3	5.08	7.80
P9072H20-00-4	7.62	10.3
P9072H20-00-5	10.16	0
P9072H20-00-6	12.70	12.9
P9072H20-00-7	15.24	0
P9072H20-00-8	17.78	25.40
P9072H20-00-9	20.32	Q3.10
P9072H20-00-A	22.86	28.60
P9072H20-00-B	25.40	Q8.10
P9072H20-00-C	27.94	30.70
P9072H20-00-D	30.48	33.20
P9072H20-00-E	33.02	35.80
P9072H20-00-F	35.56	38.30
P9072H20-00-G	38.10	40.90
P9072H20-00-H	40.64	43.40
P9072H20-00-I	43.18	46.00

ORDERING INFORMATION

P9072H20-00-X

NO OF WAYS
(2-18)

MATES WITH

P9072S/P9072R &
P9072T SERIES

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.25mm
±0.2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.