




DESCRIPTION : HOUSING FOR 2.54mm PITCH SHROUDED WAFER, **PART NO:** P9072H20-00-X
CRIMP TYPE X=NO. OF WAYS

RoHS

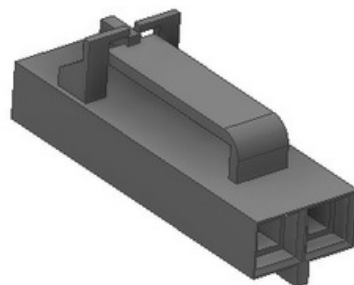

PHYSICAL DATA

INSULATION
MATERIAL : PBT
FLAMMABILITY : UL94V-0
COLOR : BLACK COLOR
PACKAGING TYPE : STANDARD

ELECTRICAL DATA

CURRENT RATING : 2.5A
INSULATION RESISTANCE : 1000M OHMS MIN
VOLTAGE RATING : 250V AC/DC
VOLTAGE PROOF : 800V AC/MIN

ENVIRONMENTAL DATA



TEMPERATURE RANGE : -25° TO +85° C
SOLDERING TEMPERATURE : 230°C FOR 5SEC



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : HOUSING FOR 2.54mm PITCH SHROUDED WAFER,
CRIMP TYPE

PART NO: P9072H20-00-X
X=NO. OF WAYS

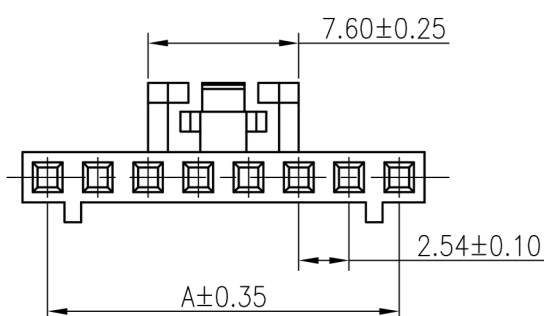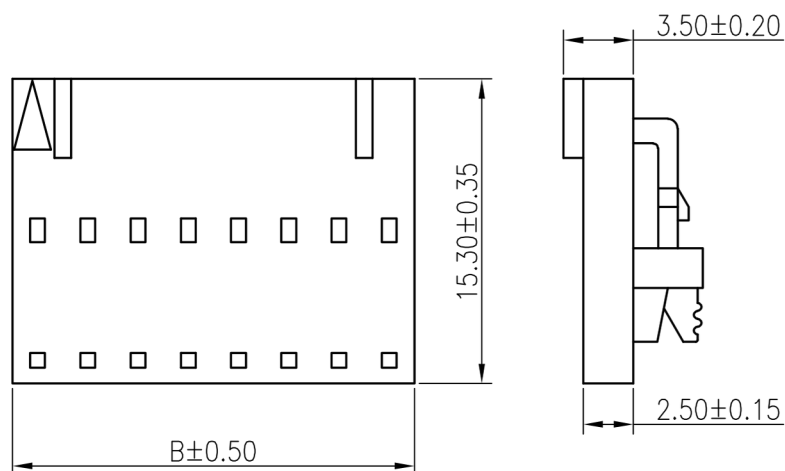

PART NO.	Dimensions	
	A	B
P9072H20-00-2	2.54	5.20
P9072H20-00-3	5.08	7.80
P9072H20-00-4	7.62	10.30
P9072H20-00-5	10.16	12.90
P9072H20-00-6	12.70	15.40
P9072H20-00-7	15.24	18.00
P9072H20-00-8	17.78	20.50
P9072H20-00-9	20.32	23.10
P9072H20-00-A	22.86	25.60
P9072H20-00-B	25.40	28.10
P9072H20-00-C	27.94	30.70
P9072H20-00-D	30.48	33.20
P9072H20-00-E	33.02	35.80
P9072H20-00-F	35.56	38.30
P9072H20-00-G	38.10	40.90
P9072H20-00-H	40.64	43.40
P9072H20-00-I	43.18	46.00

MATES WITH

P9072S/P9072R &
P9072T SERIES

ORDERING INFORMATION

P9072H20-00-X

NO OF WAYS
(2-18)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.25mm
±0.2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.