


DESCRIPTION : 2.54mm MINI LATCH WAFER, SHROUDED,
STRAIGHT

PART NO: P9072S20-12-X
X=NO. OF WAYS(2-18)

RoHS



PHYSICAL DATA

INSULATION	
MATERIAL	: PBT
FLAMMABILITY	: UL94V-0
COLOR	: BLACK COLOR
CONTACTS	: COPPER ALLOY 0.01μ MIN GOLD PLATED
PACKAGING TYPE	: STANDARD

ELECTRICAL DATA

CURRENT RATING	: 2.5A
INSULATION RESISTANCE	: 1000M OHMS MIN
CONTACT RESISTANCE	: 20m OHMS MAX
VOLTAGE RATING	: 250V AC/DC

ENVIRONMENTAL DATA





TEMPERATURE RANGE	: -25° TO +85° C
-------------------	------------------



PROTECTRON
ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm MINI LATCH WAFER, SHROUDED,
STRAIGHT


PART NO: P9072S20-12-X
X=NO. OF WAYS(2-18)

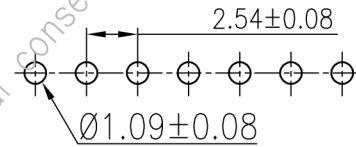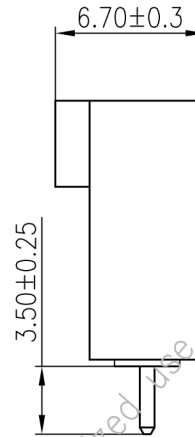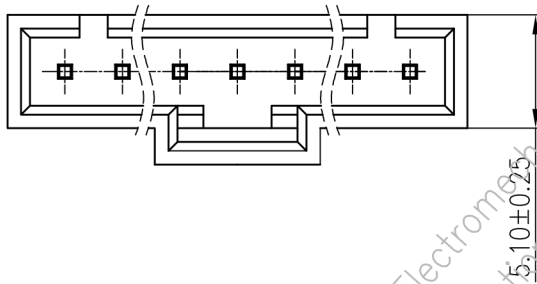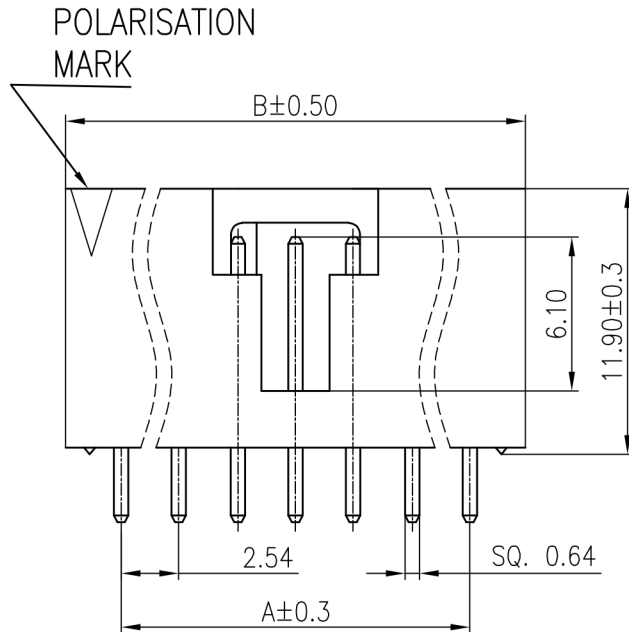

Recommended PCB Layout

NO. OF CONTACTS	DIMENSIONS	
	A	B
02	2.54	7.62
03	5.08	10.16
04	7.62	12.70
05	10.16	15.24
06	12.70	17.78
07	15.24	20.32
08	17.78	22.86
09	20.32	25.40
10	22.86	27.94
11	25.40	30.48
12	27.94	33.02
13	30.48	35.56
14	33.02	38.10
15	35.56	40.64
16	38.10	43.18
17	40.64	45.72
18	43.18	48.26

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.25mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.