




DESCRIPTION : 2.54mm PITCH P.C BOARD CONNECTOR, TOP ENTRY
ROHS COMPLIANT

PART NO:P9075S29-19-X

RoHS

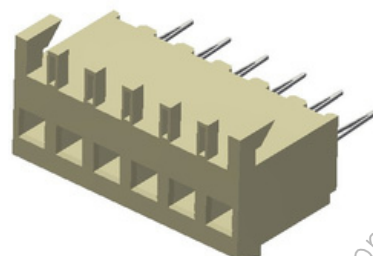

PHYSICAL DATA

MATERIAL	
INSULATION	: NYLON 66/NYLON 6T
FLAMMABILITY	: UL94V-2
CONTACT	: COPPER ALLOY
FINISH	: TIN PLATING
PACKING	: TRAY PACKING

ELECTRICAL DATA

CURRENT RATING	: 3A AC, DC
INSULATION RESISTANCE	: 5000M Ω Min.
DIELECTRIC WITHSTANDING	: 1500VAC FOR 1 MINUTE
CONTACT RESISTANCE	: 20m Ω Max.

ENVIRONMENTAL DATA


TEMPERATURE RANGE	: -40°C TO +105°C
-------------------	-------------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 2.54mm PITCH P.C BOARD CONNECTOR, TOP ENTRY
ROHS COMPLIANT

PART NO: P9075S29-19-X

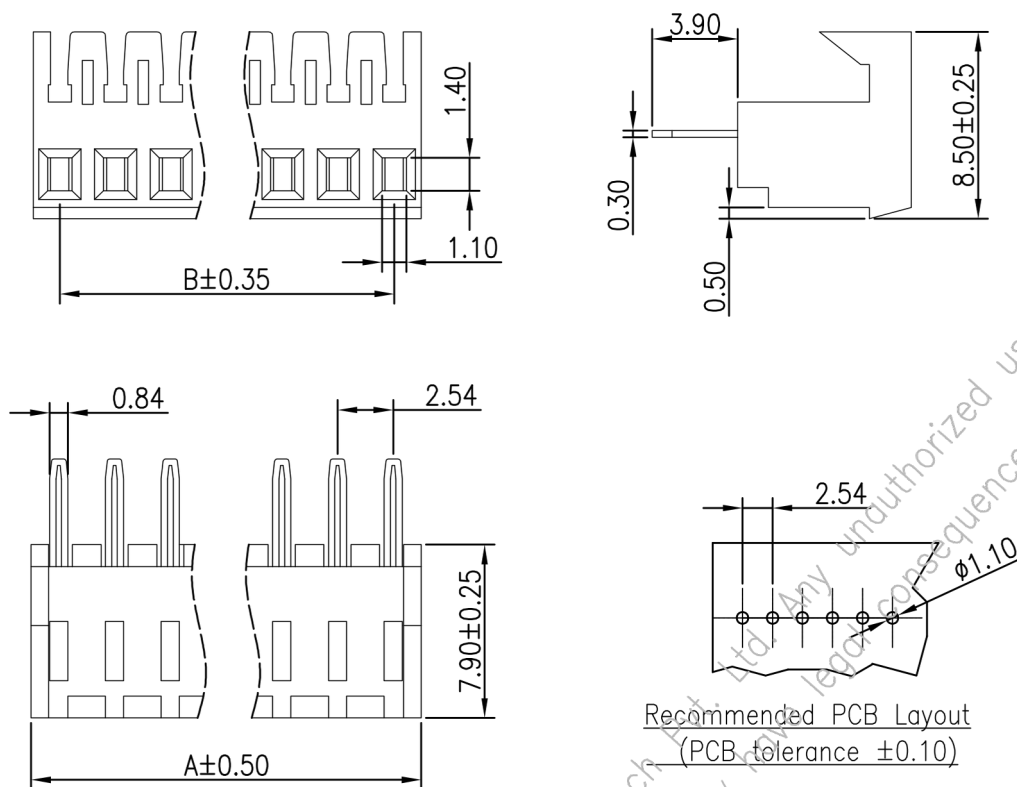


Circuits	DIMENSION	
	A	B
2	5.08	2.54
3	7.62	5.08
4	10.16	7.62
5	12.70	10.16
6	15.24	12.70
7	17.78	15.24
8	20.32	17.78
9	22.86	20.32
10	25.40	22.86
11	27.94	25.40
12	30.48	27.94
13	33.02	30.48
14	35.56	33.02
15	38.10	35.56
16	40.64	38.10
17	43.18	40.64
18	45.72	43.18
19	48.26	45.72
20	50.80	48.26
21	53.34	50.80
22	55.88	53.34
23	58.42	55.88
24	60.96	58.42
25	63.50	60.96

ORDERING INFORMATION

P9075S29-19-X

NO OF CONTACTS
(2-25)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.