




PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : SH CONNECTOR HOUSING 1.0mm PITCH
DISCONNECTABLE WITH BUMP

PART NO: P9077H29-00-X
X = NO.OF CONTACTS

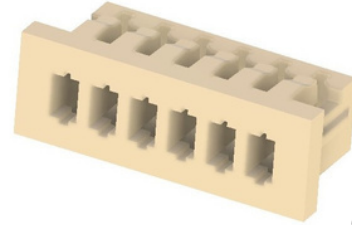

MATERIAL:

INSULATOR BODY : PBT, UL94V-0

ELECTRICAL DATA:

RATED CURRENT : 1A AC,DC
RATED VOLTAGE : 50V AC,DC
CONTACT RESISTNACE : 20mΩ MAX
INSULATION RESISTANCE : 500MΩ MIN
DIELECTRIC VOLTAGE : 500V AC PER MINUTE

ENVIRONMENTAL DATA:




OPERATING TEMP. RANGE : -40°C TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD


DESCRIPTION : SH CONNECTOR HOUSING 1.0mm PITCH
DISCONNECTABLE WITH BUMP

PART NO: P9077H29-00-X
X = NO.OF CONTACTS

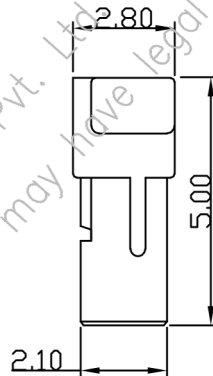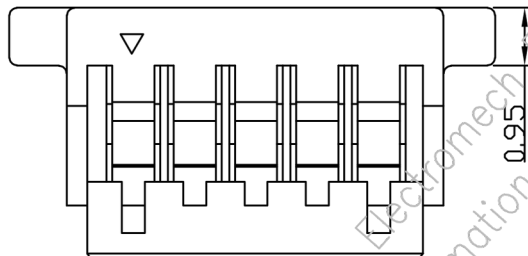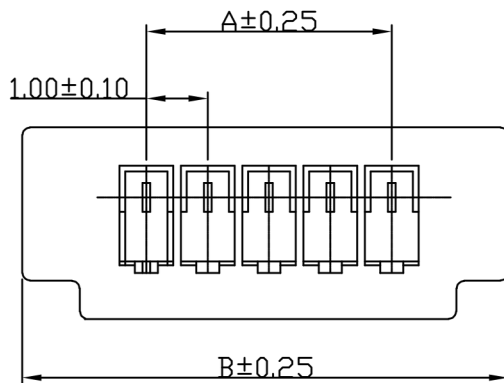

CONTACT	DIMENSIONS	
	A	B
02	1.00	5.00
03	2.00	6.00
04	3.00	7.00
05	4.00	8.00
06	5.00	9.00
07	6.00	10.0
08	7.00	11.0
09	8.00	12.0
10	9.00	13.0
11	10.0	14.0
12	11.0	15.0
13	12.0	16.0
14	13.0	17.0
15	14.0	18.0
16	15.0	19.0
17	16.0	20.0
18	17.0	21.0
19	18.0	22.0
20	19.0	23.0

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.5\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

<http://www.protectron.in>

protectron@protectron.in