




DESCRIPTION : WAFER 1.0mm PITCH, DISCONNECTABLE,
RIGHT ANGLE SURFACE MOUNT, RoHS.

PART NO: P9077R29-19-X

RoHS



PHYSICAL DATA

INSULATION

MATERIAL

FLAMMABILITY

CONTACT

MATERIAL

FINISH

:

:

:

:

PA9T+30%G.F

UL94V-0

COPPER ALLOY

TIN PLATED

ELECTRICAL DATA

CURRENT RATING

VOLTAGE RATING

INSULATION RESISTANCE

DIELECTRIC WITHSTANDING

CONTACT RESISTANCE

:

:

:

:

:

1A AC/DC

50 V AC/DC

100M OHMS MIN

250V AC/MIN

20m OHMS MAX

ENVIRONMENTAL DATA

TEMPERATURE RANGE

:





-25°C TO +85°C



PROTECTRON
ELECTROMECH (P) LTD

DESCRIPTION : WAFER 1.0mm PITCH, DISCONNECTABLE,
RIGHT ANGLE SURFACE MOUNT, RoHS.


PART NO: P9077R29-19-X

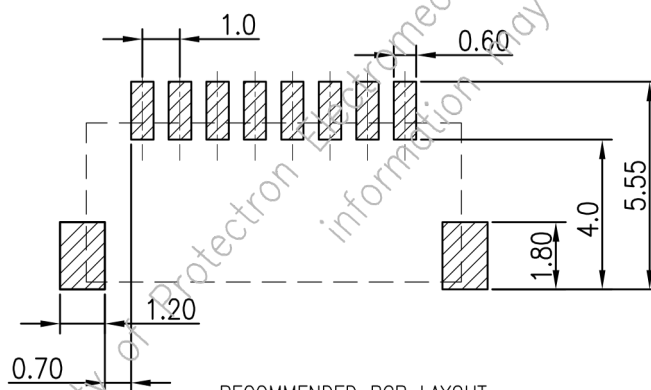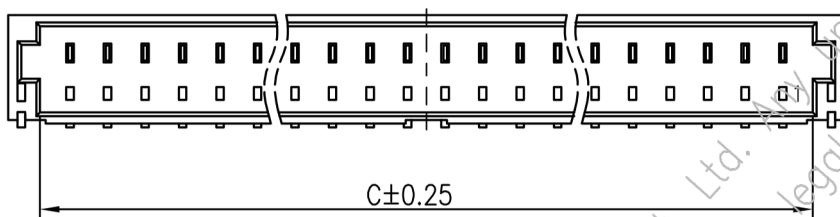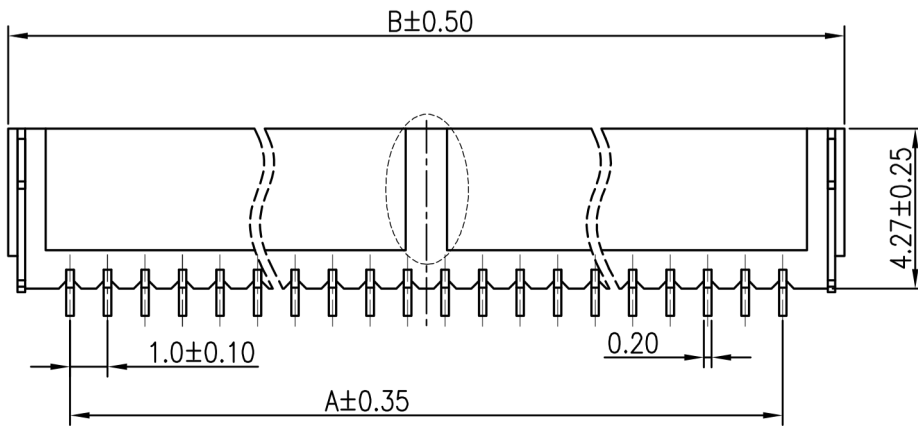

RECOMMENDED PCB LAYOUT
(PCB TOLERANCE ± 0.05)

NO. OF WAYS	DIMENSION			PART NUMBER
	A	B	C	
02	1.00	4.30	2.60	P9077R29-19-2
03	2.00	5.30	3.60	P9077R29-19-3
04	3.00	6.30	4.60	P9077R29-19-4
05	4.00	7.30	5.60	P9077R29-19-5
06	5.00	8.30	6.60	P9077R29-19-6
07	6.00	9.30	7.60	P9077R29-19-7
08	7.00	10.30	8.60	P9077R29-19-8
09	8.00	11.30	9.60	P9077R29-19-9
10	9.00	12.30	10.60	P9077R29-19-A
11	10.00	13.30	11.60	P9077R29-19-B
12	11.00	14.30	12.60	P9077R29-19-C
13	12.00	15.30	13.60	P9077R29-19-D
14	13.00	16.30	14.60	P9077R29-19-E
15	14.00	17.30	15.60	P9077R29-19-F
16	15.00	18.30	16.60	P9077R29-19-G
17	16.00	19.30	17.60	P9077R29-19-H
18	17.00	20.30	18.60	P9077R29-19-I
19	18.00	21.30	19.60	P9077R29-19-J
20	19.00	22.30	20.60	P9077R29-19-K

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ± 0.35 mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in