




DESCRIPTION : 1.0mm PITCH SH CONNECTOR, STRAIGHT
SMT TYPE, RoHS

PART NO: P9077S29-19-X
X = NO.OF CONTACTS



MATERIAL:

INSULATOR BODY : NYLON 6T, UL94V-0
CRIMP TERMINAL : PHOSPHOR BRONZE, TIN PLATED

ELECTRICAL DATA:

RATED CURRENT : 1A AC/DC
RATED VOLTAGE : 50V AC/DC
CONTACT RESISTANCE : 20m OHMS MAX
INSULATION RESISTANCE : 100M OHMS MIN
DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE

ENVIRONMENTAL DATA:





OPERATING TEMP. RANGE : -25°C TO +85°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 1.0mm PITCH SH CONNECTOR, STRAIGHT
SMT TYPE, RoHS


PART NO: P9077S29-19-X
X = NO.OF CONTACTS

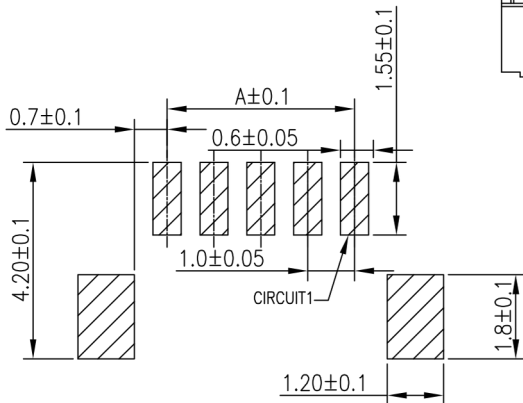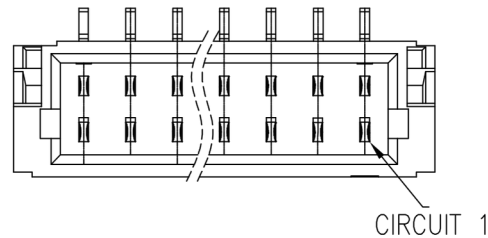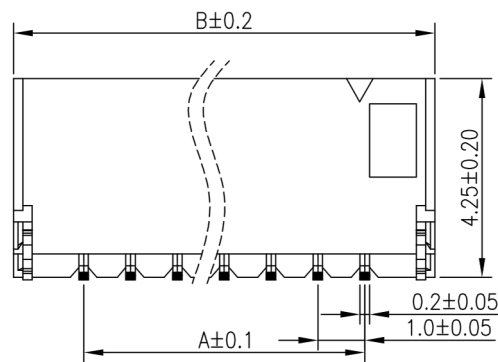

PCB LAYOUT

DIMENSION		NO OF WAYS
A	B	
1.00	4.00	2
2.00	5.00	3
3.00	6.00	4
4.00	7.00	5
5.00	8.00	6
6.00	9.00	7
7.00	10.00	8
8.00	11.00	9
9.00	12.00	10
10.00	13.00	11
11.00	14.00	12
12.00	15.00	13
13.00	16.00	14
14.00	17.00	15
15.00	18.00	16
16.00	19.00	17
17.00	20.00	18
18.00	21.00	19
19.00	22.00	20

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.