




DESCRIPTION : PA CONNECTOR 2.0mm PITCH, SINGLE ROW
RIGHT ANGLE, RoHS

PART NO: P9086R29-12-X
X=NO. OF CONTACTS



RoHS



PHYSICAL DATA

INSULATION

MATERIAL

FLAMMABILITY

CONTACT

: PA46, BEIGE COLOR.
: UL94V-0
: COPPER ALLOY, GOLD PLATED

ELECTRICAL DATA

CURRENT RATING

INSULATION RESISTANCE

DIELECTRIC WITHSTANDING

CONTACT RESISTANCE

VOLTAGE RATING

: 2A
: 1000M Ω MIN.
: 1000V AC FOR 1 MINUTE
: 30m Ω Max.
: 250V AC/DC

ENVIRONMENTAL DATA

TEMPERATURE RANGE





: -25° TO +85°C




PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : PA CONNECTOR 2.0mm PITCH, SINGLE ROW
RIGHT ANGLE, RoHS

PART NO: P9086R29-12-X
X=NO. OF CONTACTS

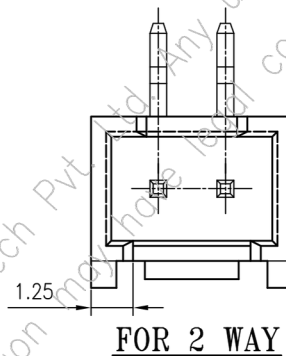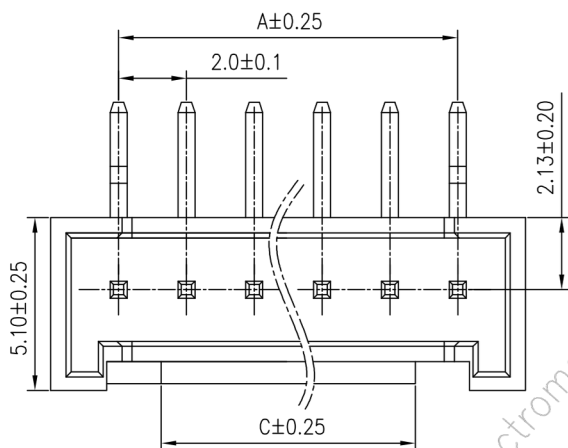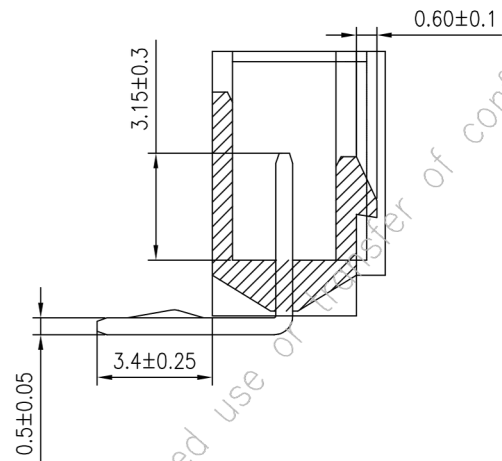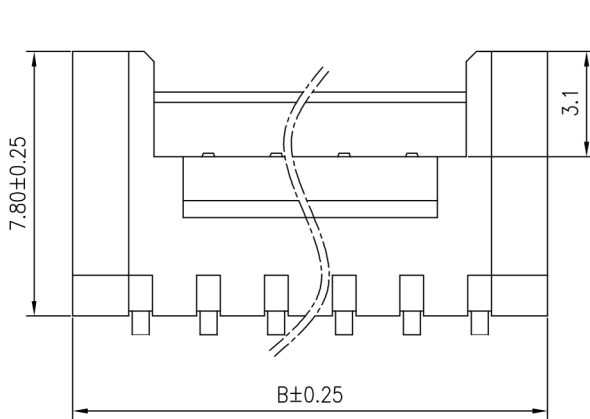


FOR 2 WAY

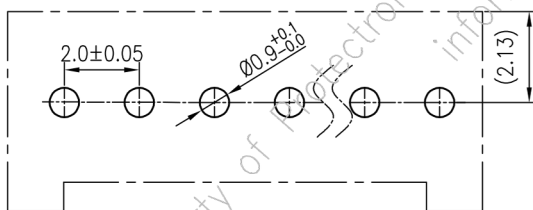

RECOMMENDED P.C.B. LAYOUT
(TOLERANCE ±0.05)

PART No.	DIMENSIONS		
	A	B	C
P9086R29-12-2	2.00	6.00	2.80
P9086R29-12-3	4.00	8.00	3.20
P9086R29-12-4	6.00	10.00	3.50
P9086R29-12-5	8.00	12.00	5.50
P9086R29-12-6	10.00	14.00	7.50
P9086R29-12-7	12.00	16.00	9.50
P9086R29-12-8	14.00	18.00	11.50
P9086R29-12-9	16.00	20.00	13.50
P9086R29-12-A	18.00	22.00	15.50
P9086R29-12-B	20.00	24.00	
P9086R29-12-C	22.00	26.00	
P9086R29-12-D	24.00	28.00	
P9086R29-12-E	26.00	30.00	
P9086R29-12-F	28.00	32.00	
P9086R29-12-G	30.00	34.00	

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.35mm

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in