

**DESCRIPTION :** 2.54mm PITCH PIN HEADER DUAL ROW RIGHT ANGLE, RoHS

**PART NO:** P9104-XX-12-XX

RoHS 



**PHYSICAL DATA**

**MATERIAL**

INSULATOR : REFER TABLE  
 COLOR : BLACK  
 CONTACT : COPPER ALLOY, GOLD PLATED  
 PACKING DETAILS : STANDARD

**ELECTRICAL DATA**

CURRENT RATING : 5A  
 INSULATION RESISTANCE : 1000M OHMS MIN  
 DIELECTRIC WITHSTANDING : 1000V AC/MIN  
 CONTACT RESISTANCE : 20M OHMS MAX

**MECHANICAL DATA**


PIN RETENTION FORCE : 0.8Kg. MIN  
 MECHANICAL LIFE : 500 CYCLES MIN

**ENVIRONMENTAL DATA**

TEMPERATURE RANGE : -40° TO +105° C  
 SOLDERING TEMPERATURE : PBT(230°C FOR 3 TO 5 SEC)  
 NYLON(260°C FOR 5 SEC)

**DESCRIPTION :** 2.54mm PITCH PIN HEADER DUAL ROW RIGHT ANGLE, RoHS

**PART NO:** P9104-XX-12-XX

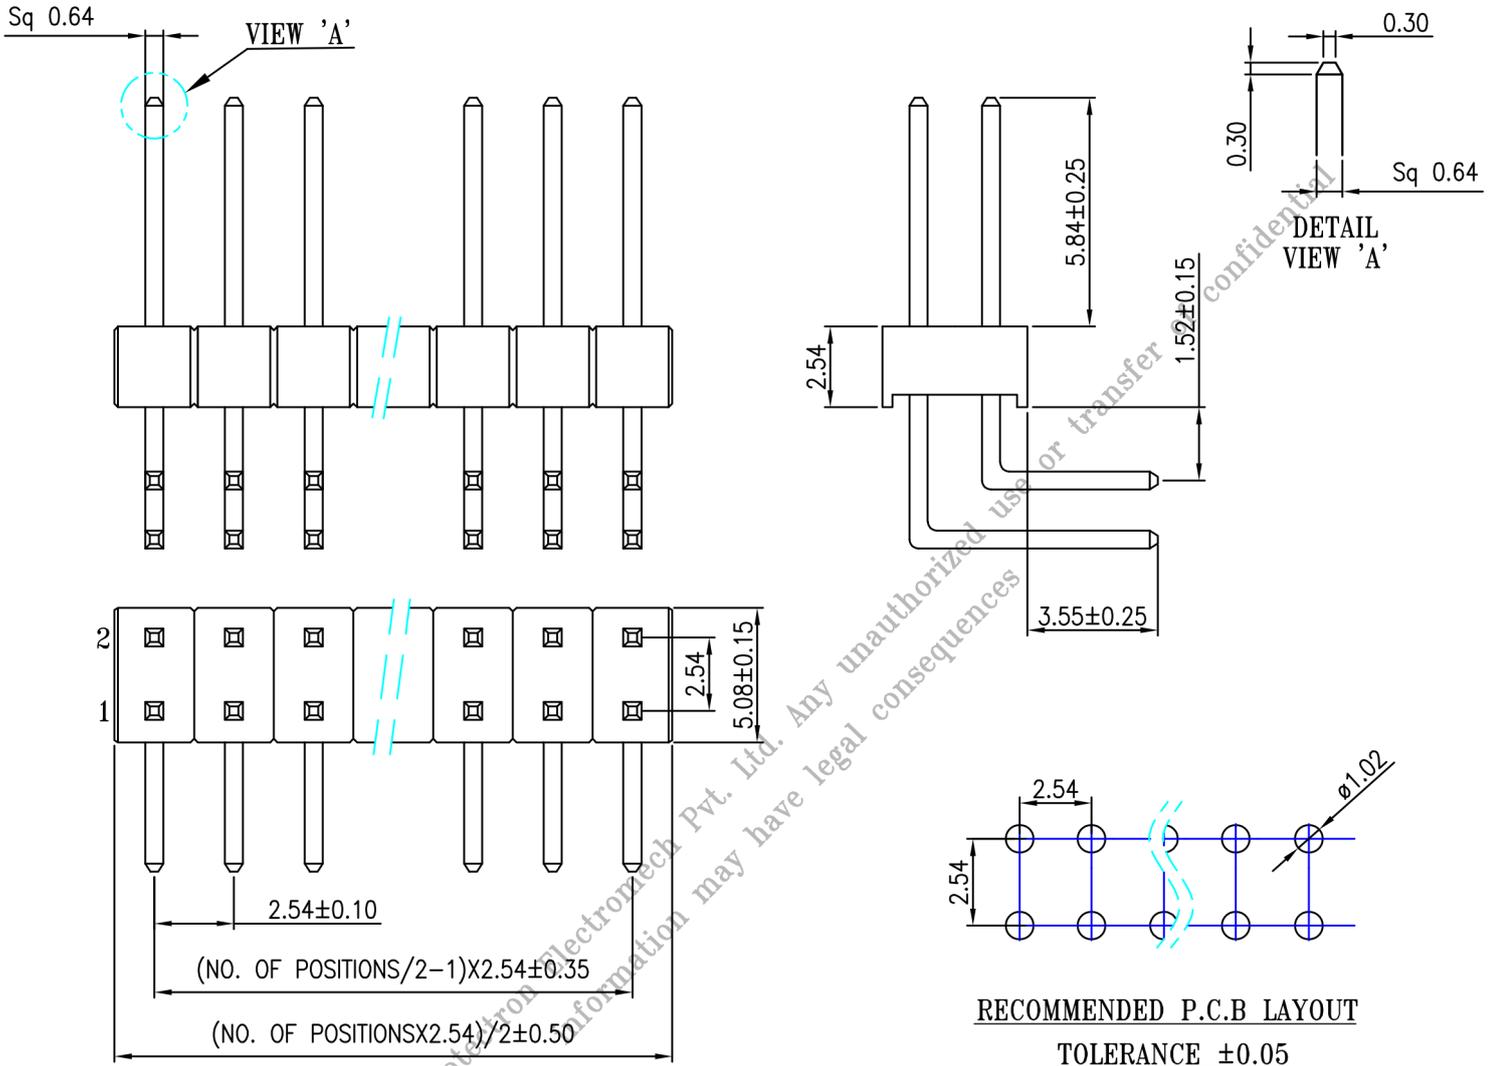

**ORDERING INFORMATION**


**P9104-XX-12-XX**

NO OF CONTACTS  
(02-80)

PLATING	
1	GOLDFLASH
2	0.75μ GOLD
3	1.27μ GOLD

MATERIAL	
BLANK	PBT
N	NYLON

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.50mm  
±2'

ALL DIMENSIONS ARE IN MM.  
IF UNLESS OTHERWISE SPECIFIED.