




DESCRIPTION : PIN HEADER, 2.54mm PITCH, DOUBLE ROW,
STRAIGHT, GOLD PLATED

PART NO: P9108-XXD12-1
XX=NO. OF CONTACTS

RoHS



PHYSICAL DATA

INSULATION BODY : GLASS FILLED POLYESTER
CONTACT : COPPER ALLOY, GOLD PLATED

ELECTRICAL DATA

CURRENT RATING : 3A
INSULATION RESISTANCE : 1000M Ω MIN
DIELECTRIC WITHSTANDING : 1000V AC FOR ONE MINUTE
CONTACT RESISTANCE : 20m OHMS MAX

MECHANICAL DATA

PIN RETENTION FORCE : 0.8Kg MIN

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40°C TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER, 2.54mm PITCH, DOUBLE ROW,
STRAIGHT, GOLD PLATED

PART NO: P9108-XXD12-1
XX=NO. OF CONTACTS

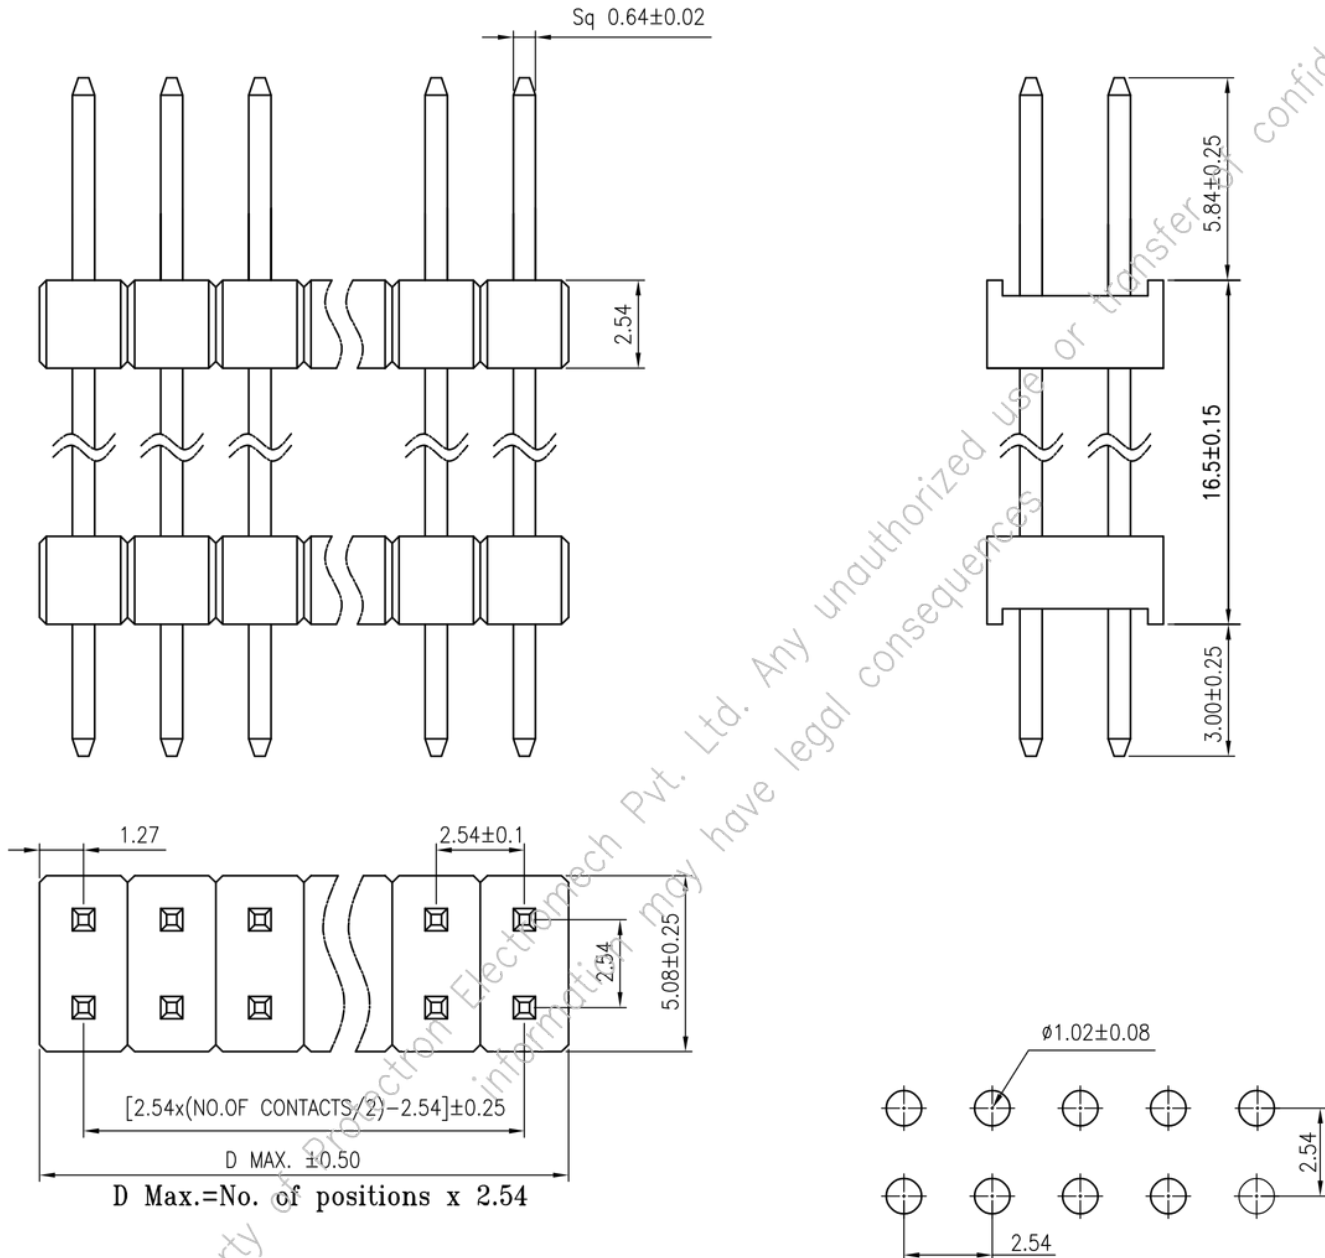

RECOMMENDED PCB LAYOUT
(TOLERANCE ± 0.05)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: $\pm 0.50\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.