


DESCRIPTION : PIN HEADER, 2.54mm PITCH, DOUBLE ROW,
STRAIGHT, GOLD PLATED

PART NO: P9108-XXT4J-1
XX=NO. OF CONTACTS

RoHS



PHYSICAL DATA

INSULATION BODY : GLASS FILLED POLYESTER
CONTACT : COPPER ALLOY, GOLD PLATED

ELECTRICAL DATA

CURRENT RATING : 3A
INSULATION RESISTANCE : 1000M Ω MIN
DIELECTRIC WITHSTANDING : 1000V AC FOR ONE MINUTE
CONTACT RESISTANCE : 20m OHMS MIN

MECHANICAL DATA

PIN RETENTION FORCE : 1Kg MIN

ENVIRONMENTAL DATA


TEMPERATURE RANGE : -40°C TO +105°C



PROTECTRON®
ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER, 2.54mm PITCH, DOUBLE ROW,
STRAIGHT, GOLD PLATED

PART NO: P9108-XXT4J-1
XX=NO. OF CONTACTS

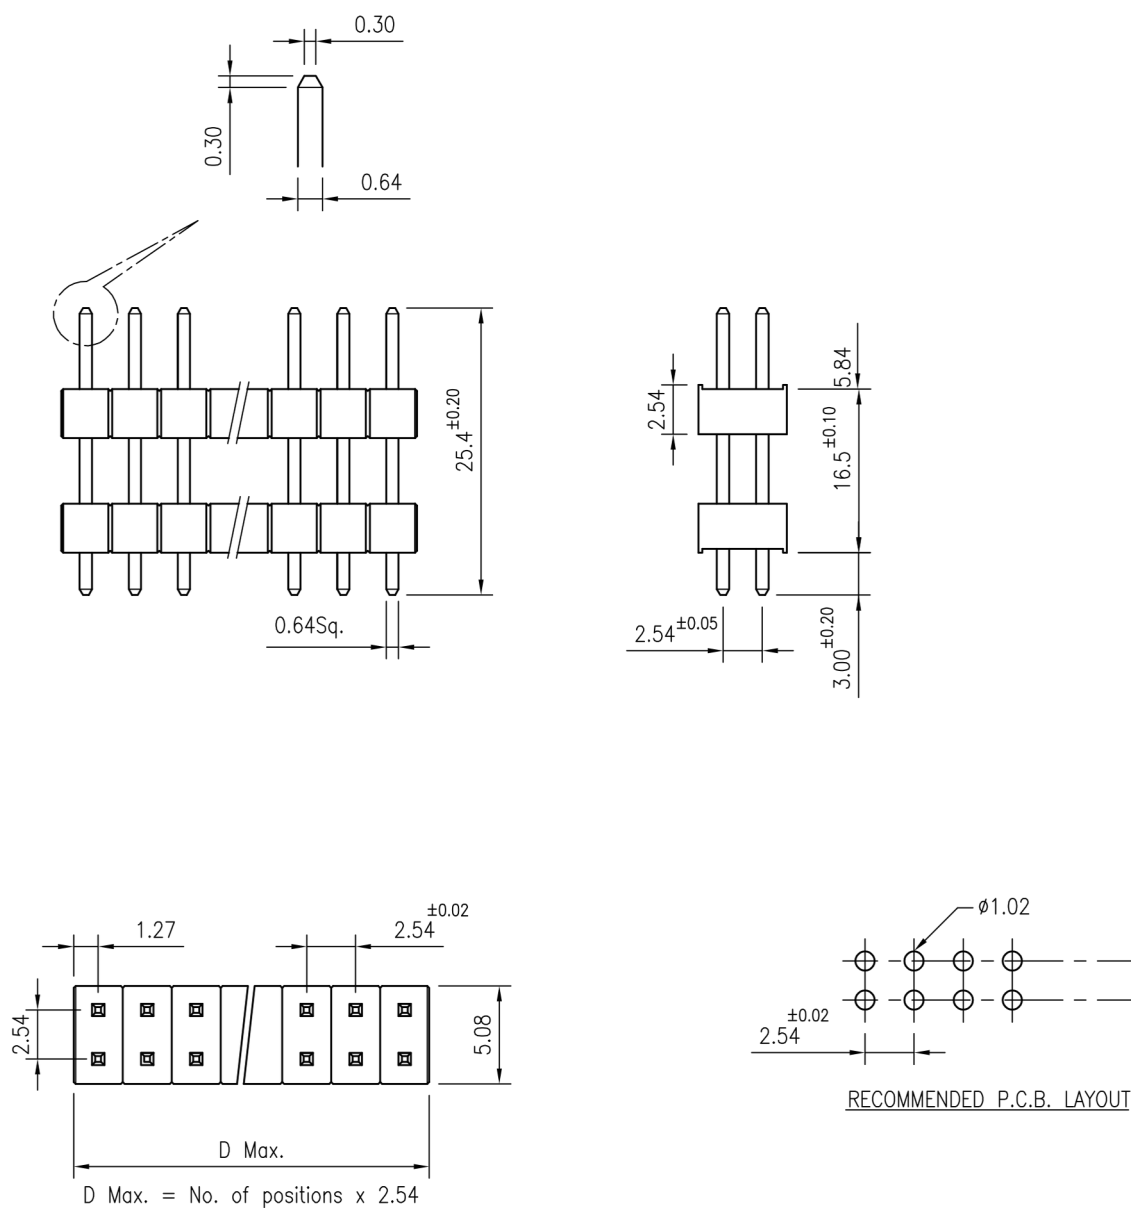

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.50mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.