

DESCRIPTION : 2.54MM PITCH PIN HEADER, DOUBLE ROW, SMT,
DOUBLE DECKER,GOLD PLATED, RoHS

PART NO: P910C-XX931-1A

RoHS



PHYSICAL DATA

MATERIAL:

INSULATOR BODY

: PBT 30% GF

CONTACT

: UL94V-0

ELECTRICAL DATA

RATED CURRENT

: 3 A

CONTACT RESISTANCE

: 10m OHMS MAX.

INSULATION RESISTANCE

: 1000M OHMS MIN.

DIELECTRIC WITHSTANDING

: 1000V AC FOR 1 MINUTE

MECHANICAL DATA

PIN RETENTION FORCE

: 1Kg MIN.

ENVIRONMENTAL DATA

TEMPERATURE RANGE




: -40°C TO +105°C



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : 2.54MM PITCH PIN HEADER, DOUBLE ROW, SMT,
DOUBLE DECKER, GOLD PLATED, RoHS

PART NO: P910C-XX931-1A

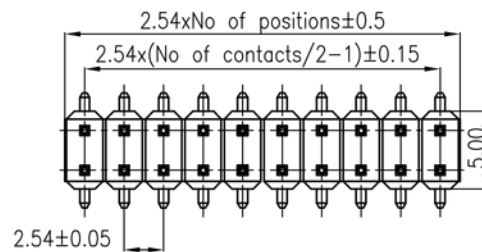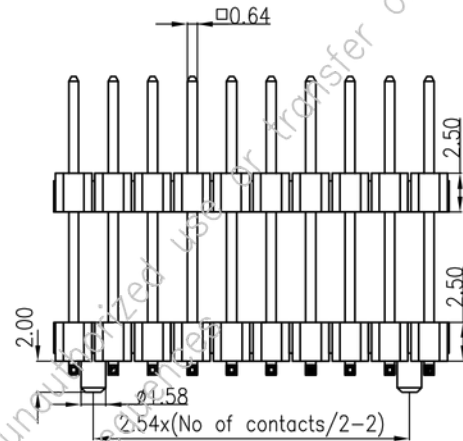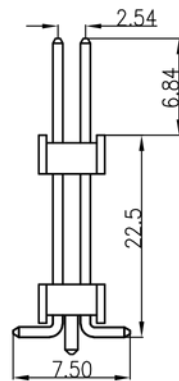

RECOMMENDED P.C.B. LAYOUT
(PCB TOLERANCE ±0.05)

Projection:



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.5mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.

www.protectron.in

protectron@protectron.in