



DESCRIPTION : 2.54MM PITCH PIN HEADER, DOUBLE ROW, SMT,
DOUBLE DECKER,GOLD PLATED, RoHS

PART NO: P910C-XX931-1A

RoHS



PHYSICAL DATA

MATERIAL:

INSULATOR BODY : PBT 30% GF

CONTACT : UL94V-0

ELECTRICAL DATA

RATED CURRENT : 3 A
CONTACT RESISTANCE : 10m OHMS MAX.
INSULATION RESISTANCE : 1000M OHMS MIN.
DIELECTRIC WITHSTANDING : 1000V AC FOR 1 MINUTE

MECHANICAL DATA





PIN RETENTION FORCE : 1Kg MIN.

ENVIRONMENTAL DATA

TEMPERATURE RANGE : -40°C TO +105°C

DESCRIPTION : 2.54MM PITCH PIN HEADER, DOUBLE ROW, SMT,
DOUBLE DECKER, GOLD PLATED, RoHS

PART NO: P910C-XX931-1A

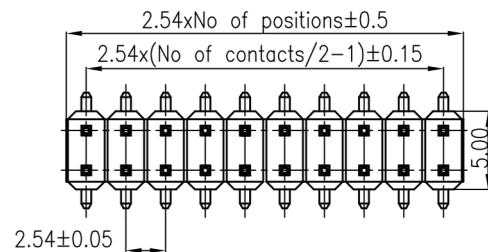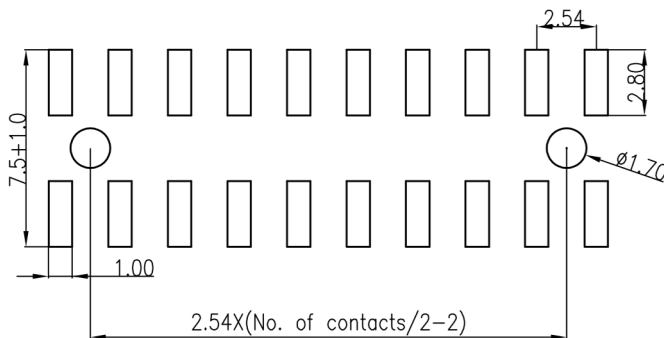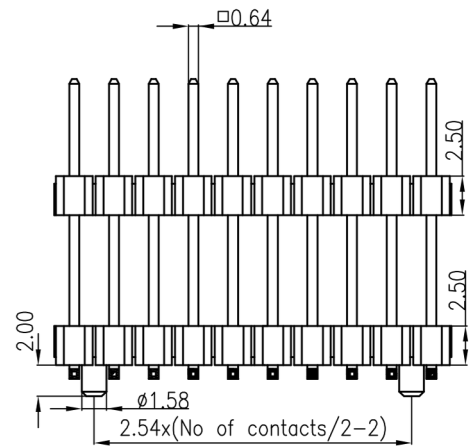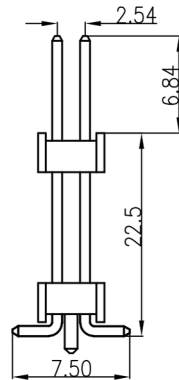

RECOMMENDED P.C.B. LAYOUT
(PCB TOLERANCE ±0.05)



Scale: NTS

Sht. Size: A4

Gen. Tol.: ±0.5mm
±2°

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.