




DESCRIPTION : PIN HEADER, 2.0mm PITCH, SINGLE ROW,
STRAIGHT, INSULATOR PROFILE 2.0mm

PART NO:P9111AXX-XX-1
1st XX=NO. OF CONTACTS (2-40)
2nd XX=A/B LENGTH

RoHS



PHYSICAL

INSULATION	:	POLYESTER
MATERIAL	:	UL94V-0
FLAMMABILITY	:	BLACK
COLOR	:	
CONTACT	:	
MATERIAL	:	COPPER ALLOY
PLATING	:	GOLD PLATED
PACKAGING TYPE	:	TUBE/TRAY

ELECTRICAL

CURRENT RATING	:	1A
INSULATION RESISTANCE	:	500M OHMS MIN
DIELECTRIC WITHSTANDING	:	500V AC

MECHANICAL DATA

PIN RETENTION FORCE	:	0.5KG MIN
---------------------	---	-----------

ENVIRONMENTAL DATA




TEMPERATURE RANGE	:	-40°C TO +105°C
-------------------	---	-----------------



PROTECTRON[®]
ELECTROMECH (P) LTD

DESCRIPTION : PIN HEADER, 2.0mm PITCH, SINGLE ROW,
STRAIGHT, INSULATOR PROFILE 2.0mm

PART NO:P9111AXX-XX-1
1st XX=NO. OF CONTACTS (2-40)
2nd XX=A/B LENGTH

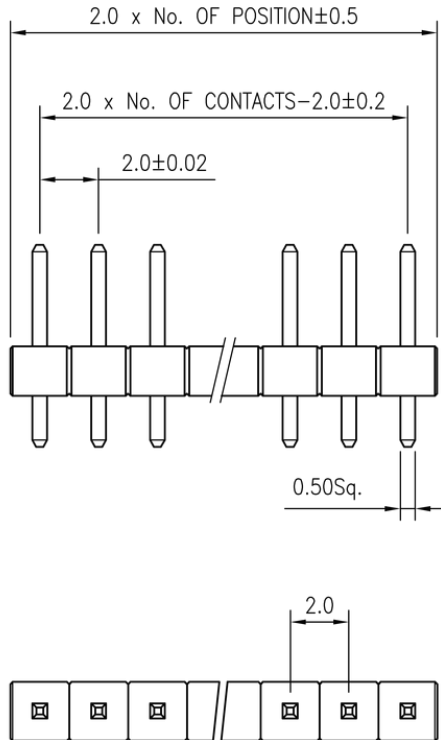

RECOMMENDED P.C.B. LAYOUT

A/B	DIMENSION
01	3.2/2.8
02	3.2/3.5
03	4.0/13.5
11	4.0/2.8
15	4.0/2.4
25	2.8/2.4

Projection:



Scale: **NTS**

Sht. Size: **A4**

Gen. Tol. $\pm 0.35\text{mm}$
 $\pm 2^\circ$

ALL DIMENSIONS ARE IN MM.
IF UNLESS OTHERWISE SPECIFIED.